


Distance to THR02 (NM)	FAP/FAF	9	8	7	6	5	4	3	2
Altitude (ft)	3 000	2 980	2 660	2 345	2 025	1 705	1 390	1 070	750

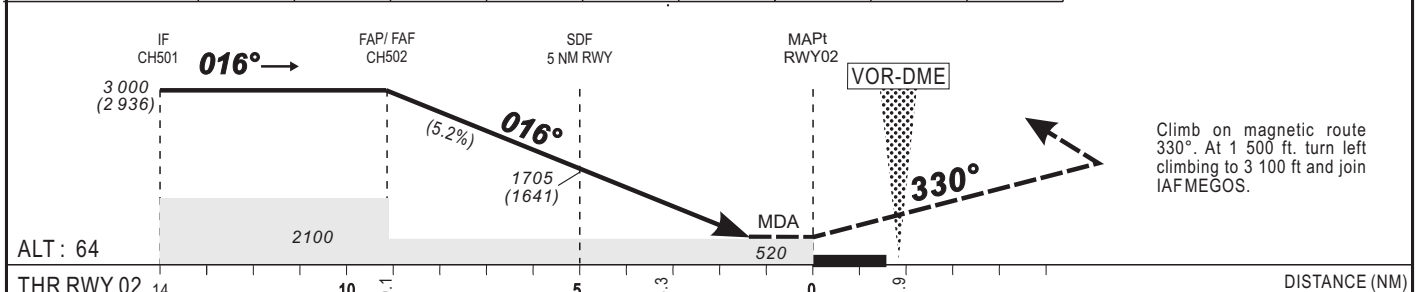

CAT	LNAV				LNAV/VNAV				RVR for take-off CATA - B - C : 400 CAT D : 400
	OCA (OCH)	MDA MDH	RVR(1)	RVR(2)	OCA (OCH)	DA MDH	RVR(1)	RVR(2)	
A	517 (453)	520 (460)	1000	1500	436 (372)	440 (380)	900	1500	Timing FAF / THR 9.1 NM KT MIN . SEC KT MIN . SEC 90 6 Min 04 140 3 Min 54 100 5 Min 28 150 3 Min 38 110 4 Min 58 160 3 Min 25 120 4 Min 33 170 3 Min 13 130 4 Min 12 180 3 Min 02
B	517 (453)	520 (460)	1200	1500	436 (372)	440 (380)	1000	1500	
C	517 (453)	520 (460)	1200	2000	436 (372)	440 (380)	1000	1800	
D	517 (453)	520 (460)	1600	2000	436 (372)	440 (380)	1400	2000	

Notes: - (1) With approach lights
- (2) Without approach lights
- Climbing sectors for take-off : between radials 293° and 189° HAI.
- Minimum temperature: 10°.

PROCEDURE TO USED ACCORDING TO AIC NR 02 / A / 2002 DAKAR - 21 MARCH 2002