



ILS Y or LOC Y RWY 05
(ACFT CAT A, B, C, D)

HEIGHTS RELATED TO THR RWY05 - ELEV 1028 FT

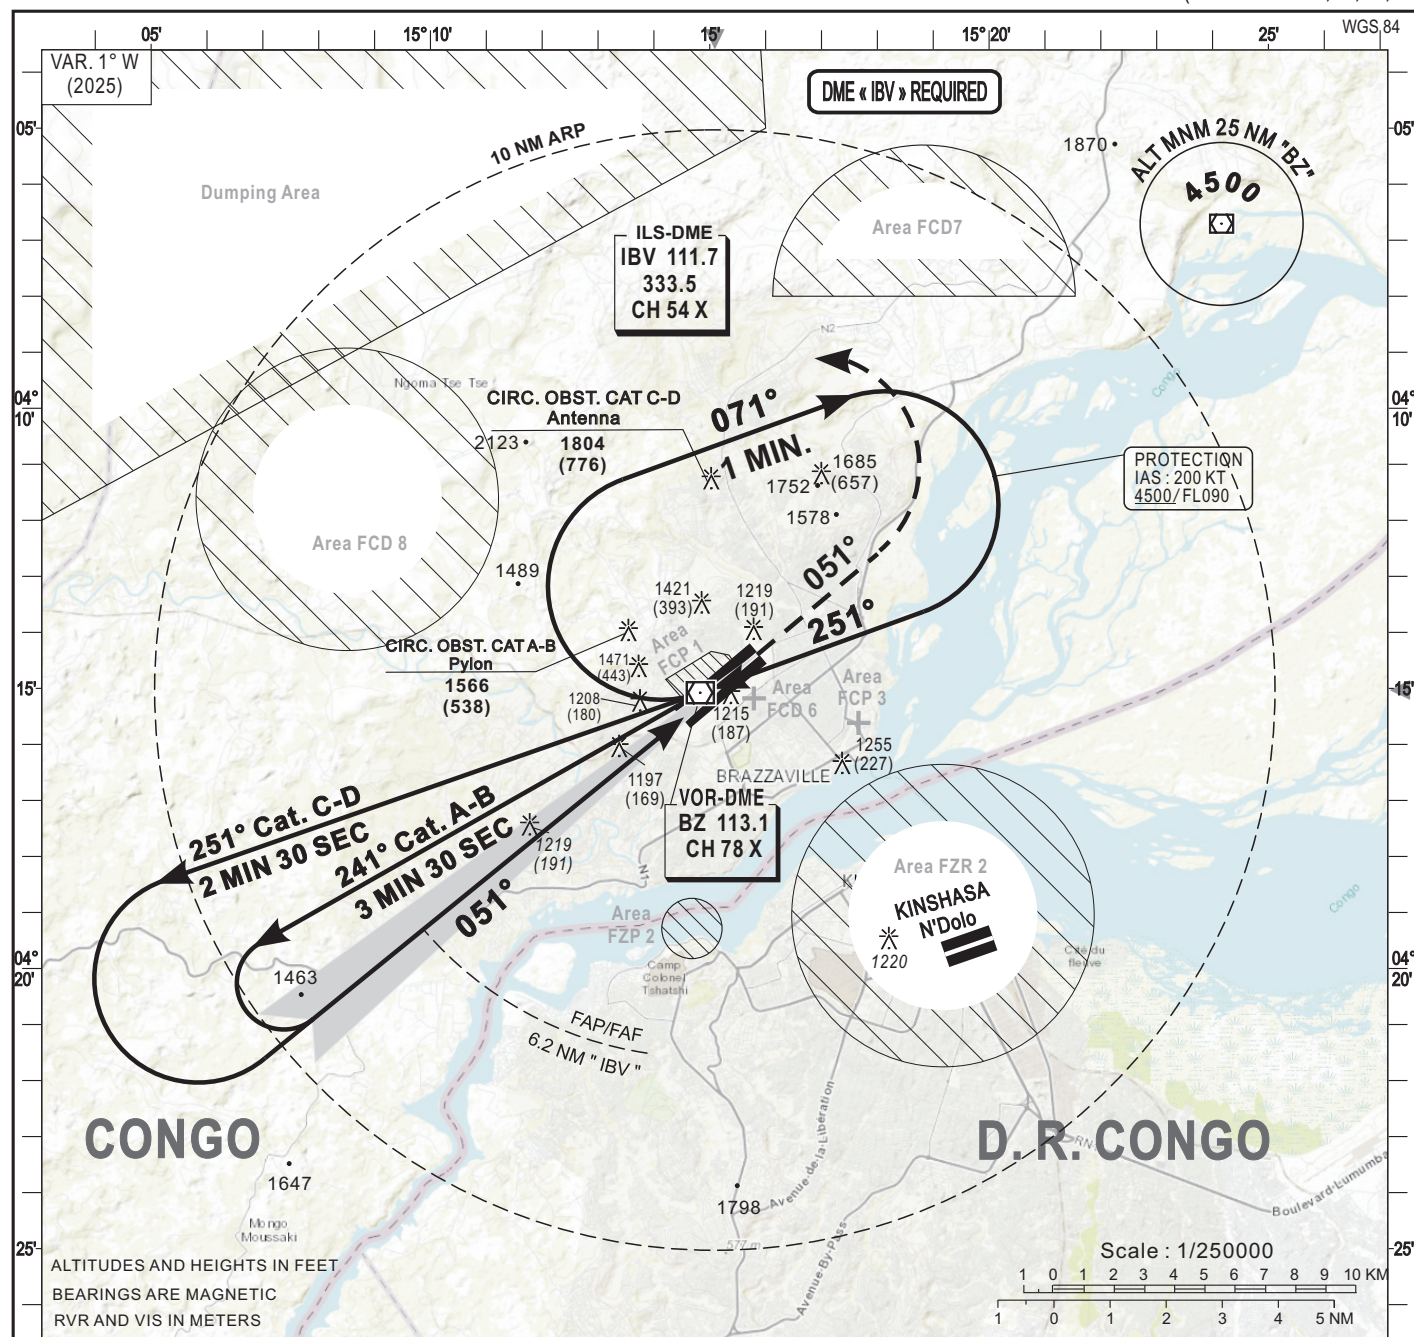

Distance to IBV (NM)	FAP/FAF		5	4	3	2	1	TRANSITION ALTITUDE: 4500
Altitude (ft)	3000		2610	2290	1970	1660	1340	

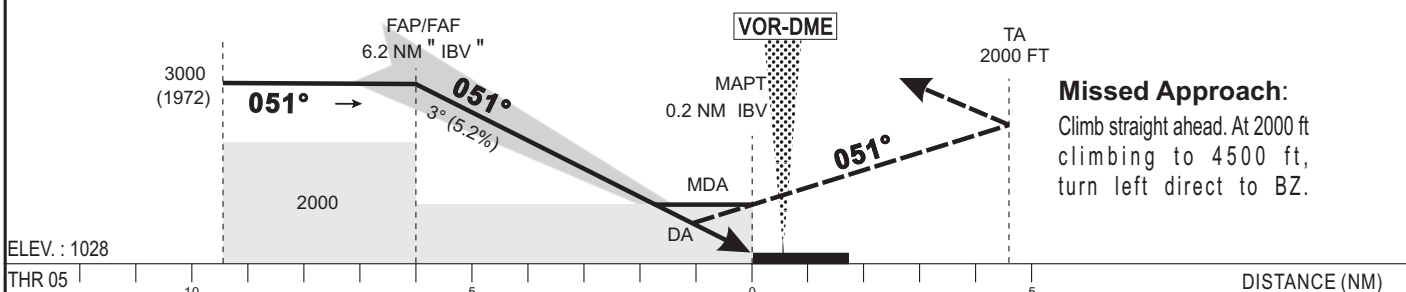

CAT	CAT. 1					LOC					Circling (3)					RVR for take-off CATA - B - C - D : 400				
	OCA (OCH)	DA	DH	RVR(1)	RVR(2)	OCA (OCH)	MDA	MDH	RVR(1)	RVR(2)	OCA (OCH)	MDA	MDH	VIS						
A	1228 (200)	1230 (200)		550	1000	1465 (437)		1470 (440)	800	1500	1862 (810)	1870	(810)	1500	Timing FAF/THR 6.0 NM					
B				550	1000				800	1500	1862 (810)	1870	(810)	1600						
C				550	1000				800	1600	2198 (1146)	2200	(1150)	2400	KT MIN SEC KT MIN SEC					
D				550	1000				1200	1800	2198 (1146)	2200	(1150)	3600						90

Notes : - (1) With approach lights - (2) Without approach lights
- (3) Daytime only - OCH and MDH AAL
- RDH : 15 m

RVR for take-off CATA - B - C - D : 400					
Timing			FAF/THR 6.0 NM		
KT	MIN	SEC	KT	MIN	SEC
90	4	Min 00	140	2	Min 34
100	3	Min 36	150	2	Min 24
110	3	Min 16	160	2	Min 15
120	3	Min 00	170	2	Min 07
130	2	Min 46	180	2	Min 00

CORRECTIONS: New version.