



HEIGHTS RELATED TO AERODROME ELEVATION

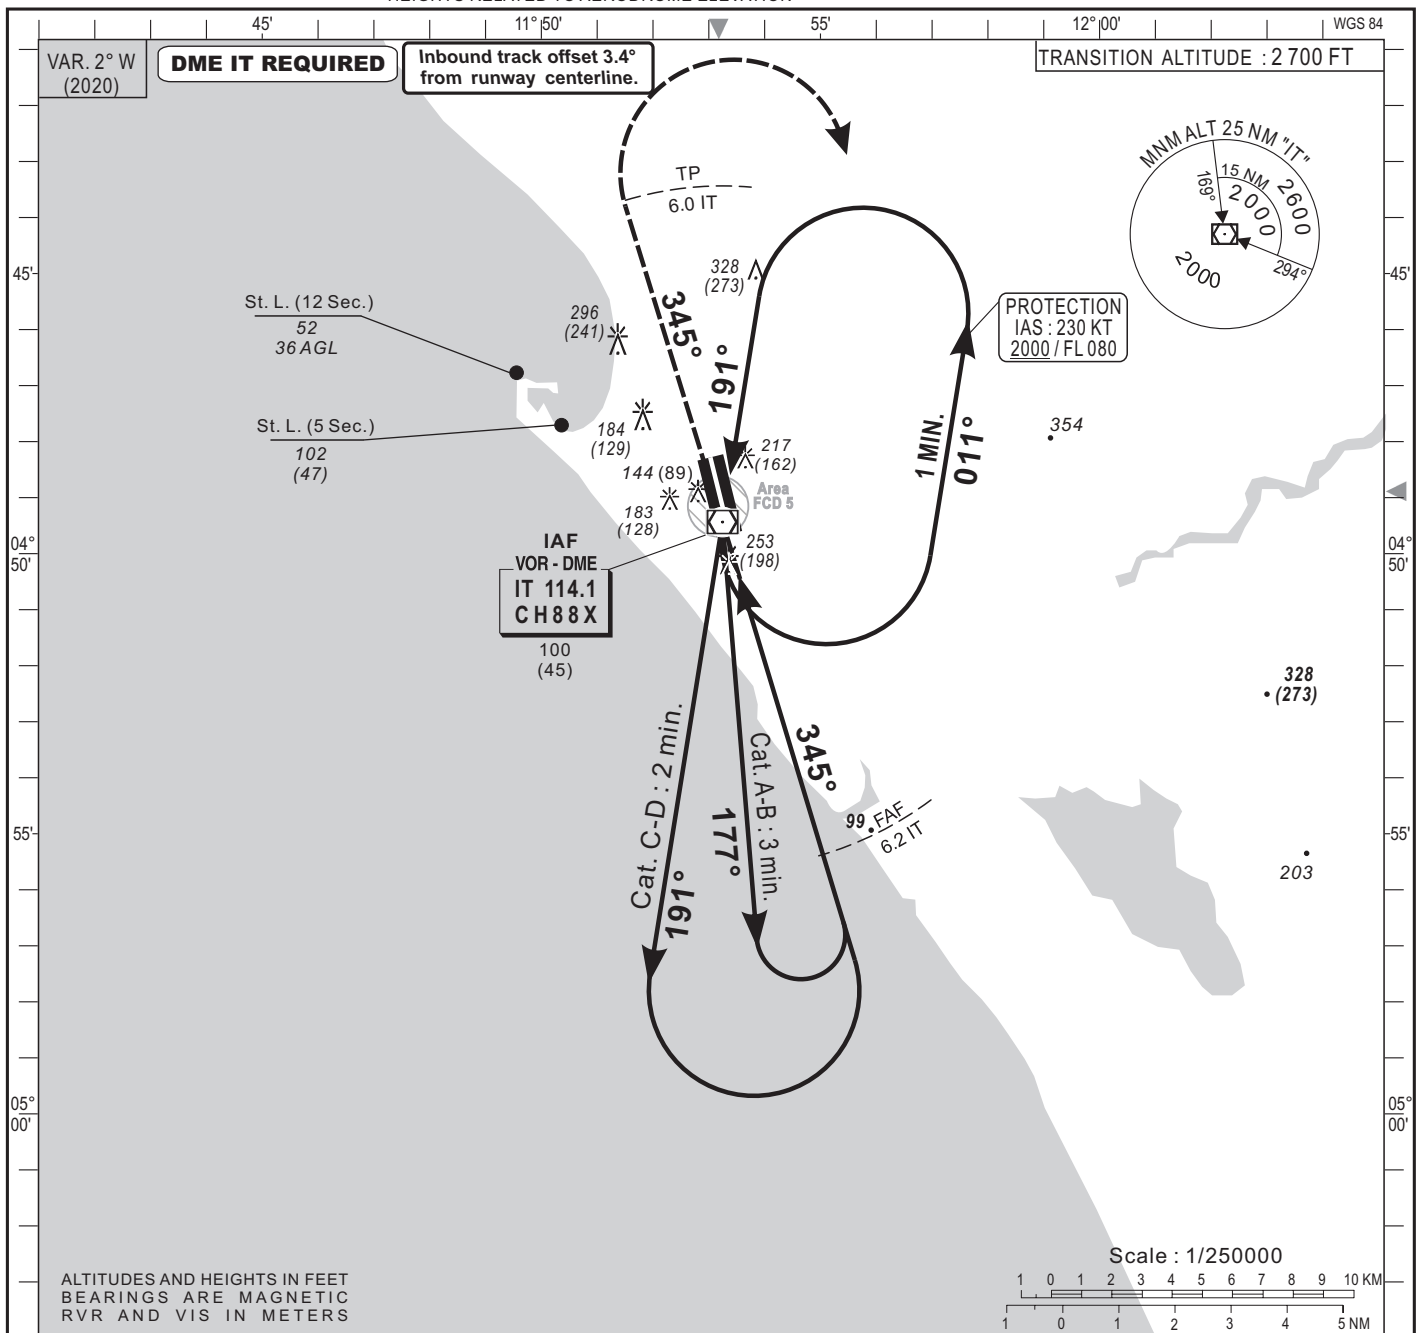

Distance FAF - IT (NM)	FAF	8	7	6	5	4	3	2
Altitude (ft)	2000			1950	1640	1320	1000	680

Notes : Inbound track offset 3.4° from runway centerline.

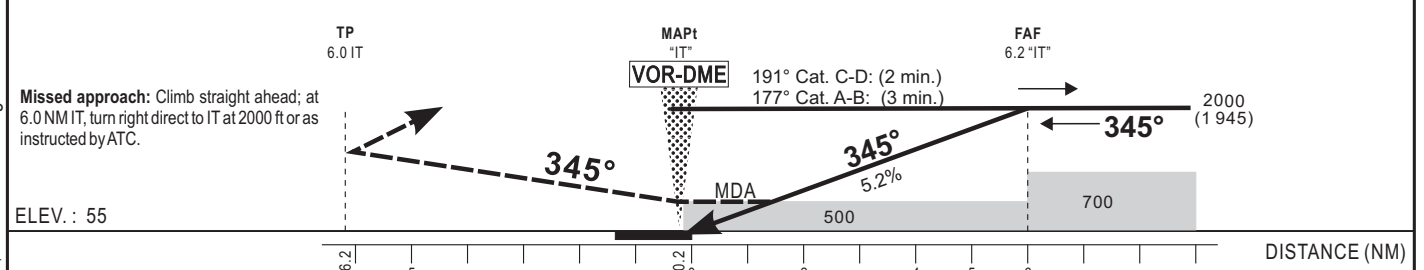

Missed approach: Climb straight ahead; at 6.0 NM IT, turn right direct to IT at 2000 ft or as instructed by ATC.

ELEV. : 55

CAT	VOR-DME				CIRCLING (*)				RVR for take-off: CAT A - B-C : 400 Cat D : 400
	OCA (OCH)	MDA	MDH	RVR	OCA (OCH)	MDA	MDH	VIS	
A	499 (444)	500 (450)	1500		528 (473)	530 (480)	1500		Timing FAF-MAPt 6.0 NM KT MIN SEC KT MIN SEC
B	499 (444)	500 (450)	1500		590 (535)	590 (540)	1600		
C	499 (444)	500 (450)	2000		820 (765)	820 (770)	2400		
D	499 (444)	500 (450)	2000		820 (765)	820 (770)	3600		

Notes : - (*) OCH and MDH AAL - Daytime only.

KT	MIN	SEC	KT	MIN	SEC
90	4	00	140	2	34
100	3	36	150	2	24
110	3	16	160	2	15
120	3	00	170	2	07
130	2	46	180	2	00

CORRECTIONS : Magnetic variation, VOR altitude/height.