


INSTRUMENT  
APPROACH CHART  
Categories A-B-C-D

ELEV. : 1231  
THR : 1226


TWR : Bouake Tower 118.9

BOUAKE (DIBK)  
RNAV(GNSS) RWY 03

HEIGHTS RELATED TO THRESHOLD 03 ELEVATION

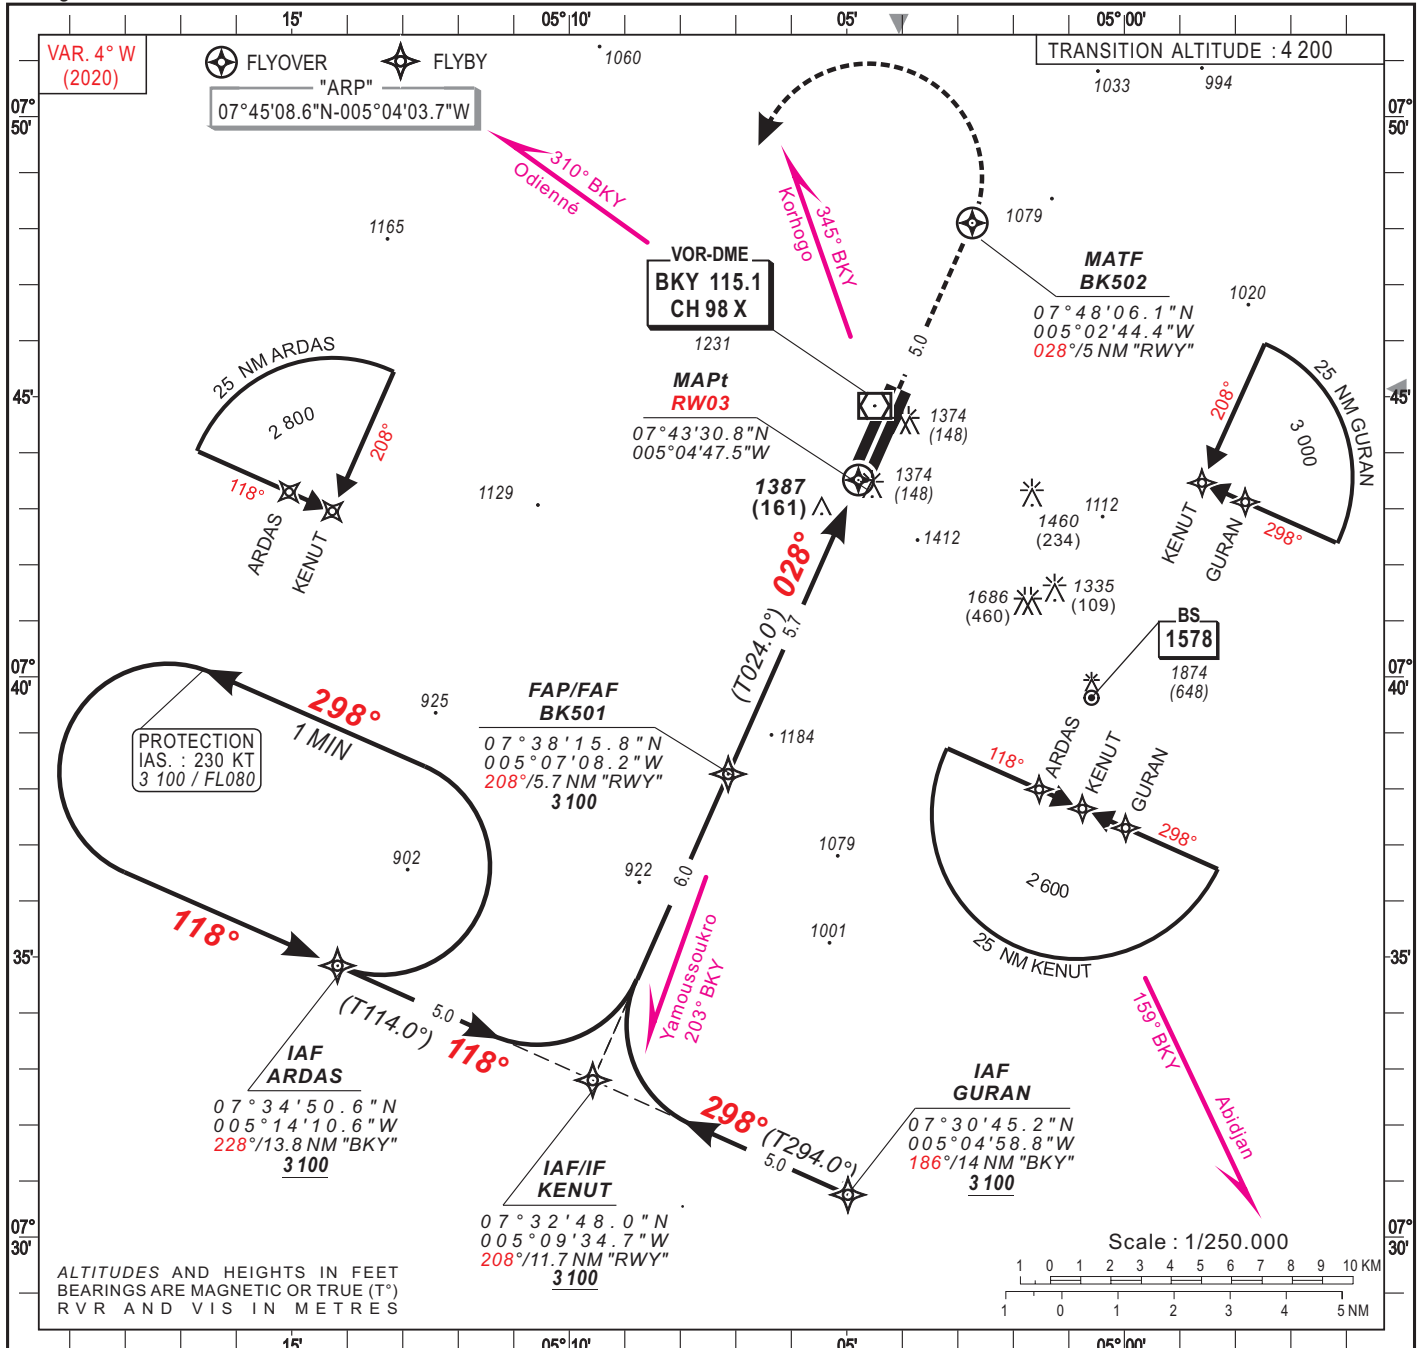

Distance to THR (NM)	FAP/FAF		6	5	4	3	2	1	Notes : - RDH : 15 m - Minimum temperature : 10°C
Altitude (ft)	3 100			2 870	2 550	2 230	1 920	1 600	

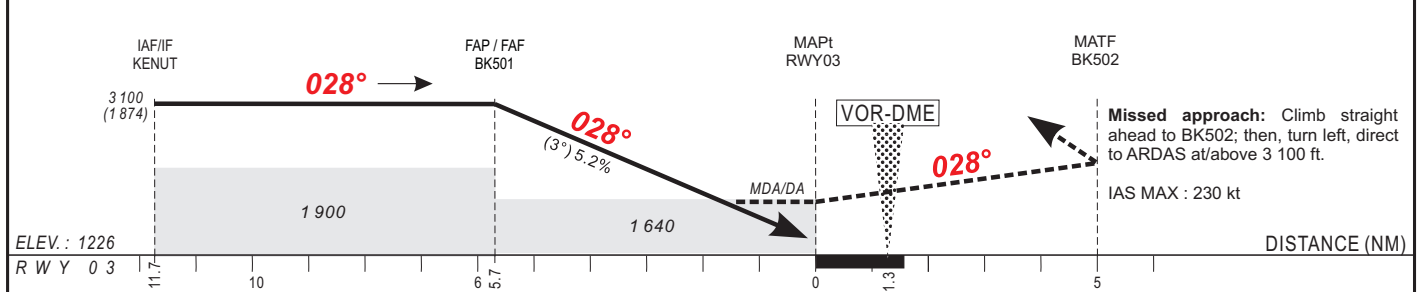

CAT	LNAV/VNAV				LNAV				CIRCLING (2)				RVR for take-off: CAT A - B - C : 400 CAT D : 400
	OCA (OCH)	DA	DH	RVR	OCA (OCH)	MDA	MDH	RVR	OCA (OCH)	MDA	MDH	VIS	
A	1633 (407)	1640 (410)	1500	1500	1633 (407)	1640 (410)	1500	1500	1811 (580)	1820 (580)	1500		Timing FAF / THR 5.7 NM KT MIN SEC KT MIN SEC
B	1633 (407)	1640 (410)	1500	1500	1633 (407)	1640 (410)	1500	1500	1811 (580)	1820 (580)	1600		
C	1633 (407)	1640 (410)	1800	1800	1633 (407)	1640 (410)	1800	1800	2079 (848)	2080 (850)	2400		
D	1633 (407)	1640 (410)	2000	2000	1633 (407)	1640 (410)	2000	2000	2079 (848)	2080 (850)	3600		

Notes : - (1) Not authorized with a remote QNH.  
- (2) Daytime only - OCH and MDH AAL

PROCEDURE TO BE USED ACCORDING TO  
DECISION N°185 / ANAC / NOA DATED ON  
12 DECEMBER 2008