
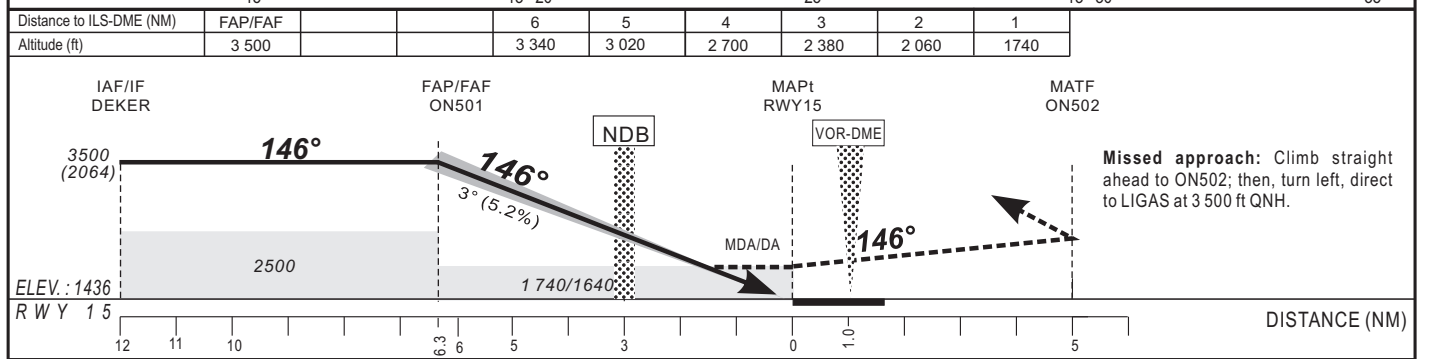


HEIGHTS RELATED TO THRESHOLD 15 ELEVATION

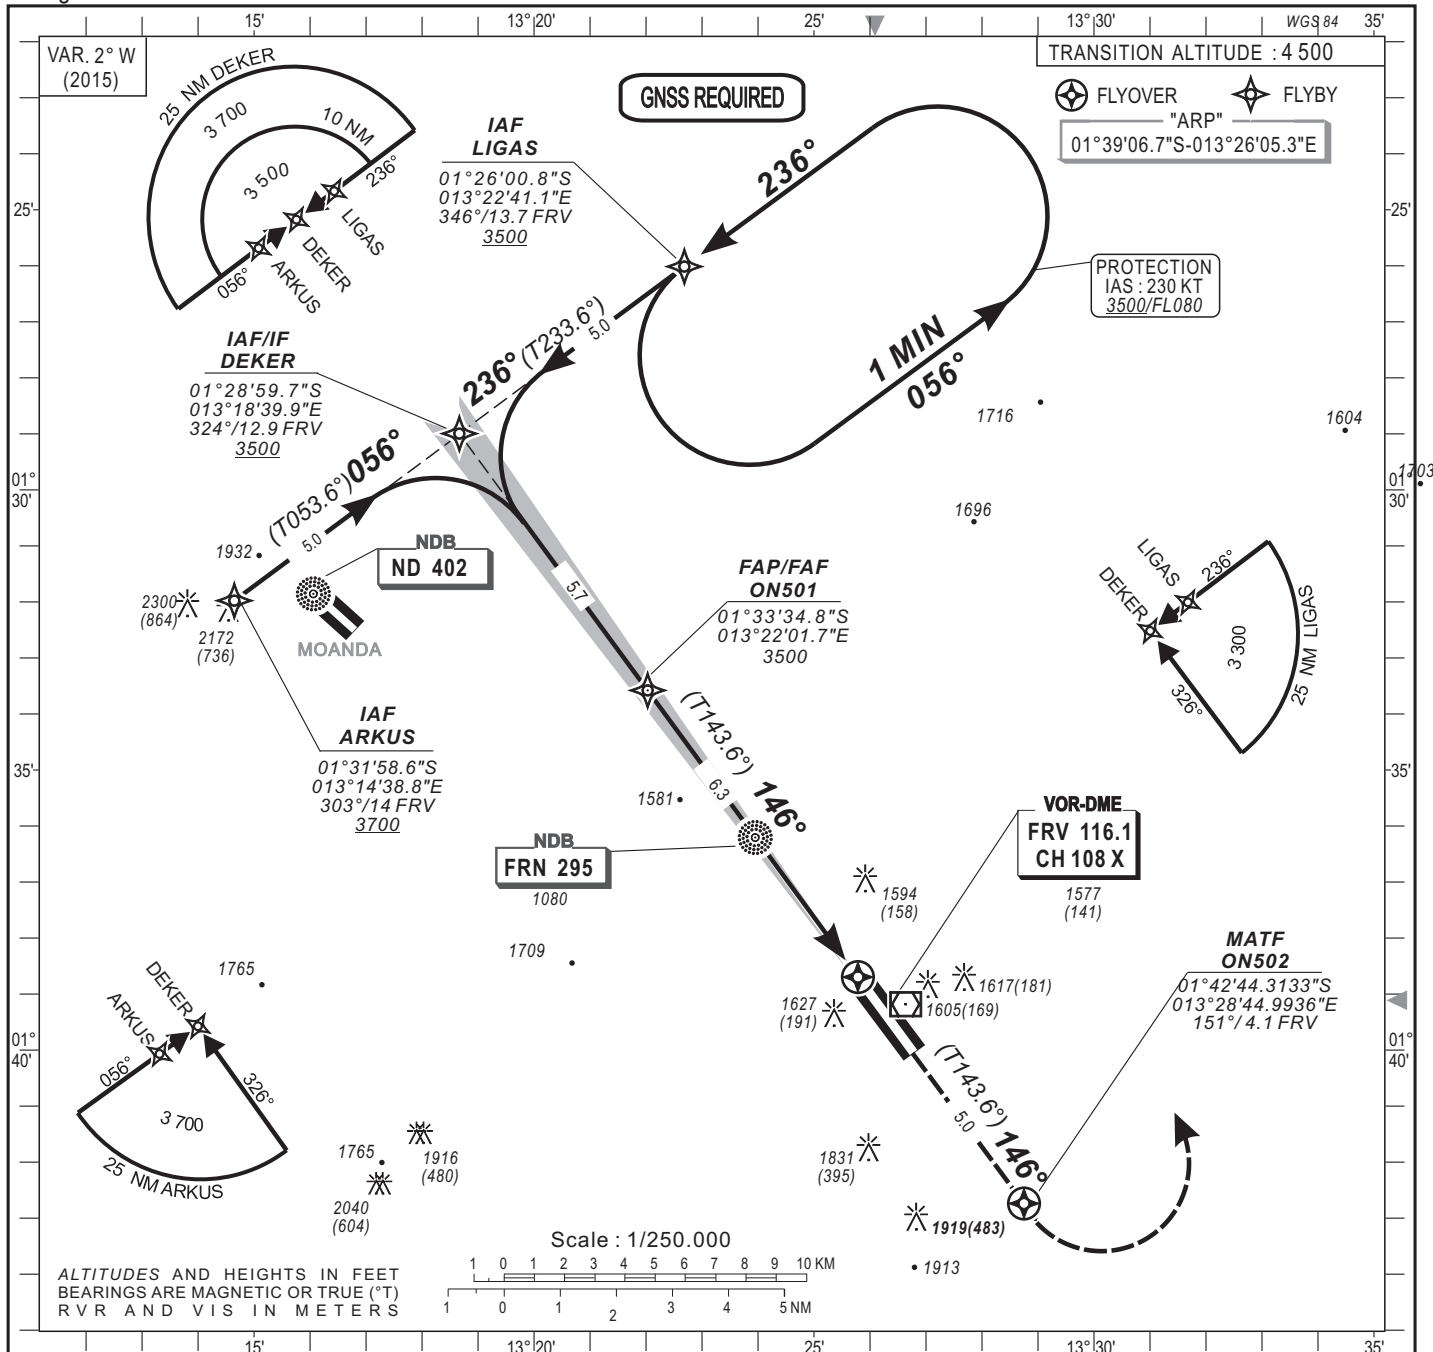

CAT	CAT.1				LOC				CIRCLING (*)				RVR for take-off: CAT A - B - C : 400 CAT D : 400				
	OCA (OCH)	DA	DH	RVR(1)	RVR(2)	OCA (OCH)	MDA	MDH	RVR(1)	RVR(2)	OCA (OCH)	MDA		MDH	VIS		
A	1598 (162)	1640 (200)	550	1000	1734 (298)	1740 (300)	900	1500	2005 (555)	2010 (560)	1500	Timing		FAF / THR 6.3 NM			
B	1610 (174)	1640 (200)	550	1000	1734 (298)	1740 (300)	1000	1500	2215 (765)	2220 (770)	1600	KT	MIN	SEC	KT	MIN	SEC
C	1618 (182)	1640 (200)	550	1000	1734 (298)	1740 (300)	1000	1800	2445 (995)	2450 (1000)	2400	90	4	12	140	2	42
D	1629 (193)	1640 (200)	550	1000	1734 (298)	1740 (300)	1400	2000	2445 (995)	2450 (1000)	3600	100	3	47	150	2	31
Notes : (1) With approach lights - (2) Without approach lights - (*) Daytime only												110	3	26	160	2	22
												120	3	09	170	2	13
												130	2	54	180	2	06

AMDT 12/18 : NORMALIZATION