
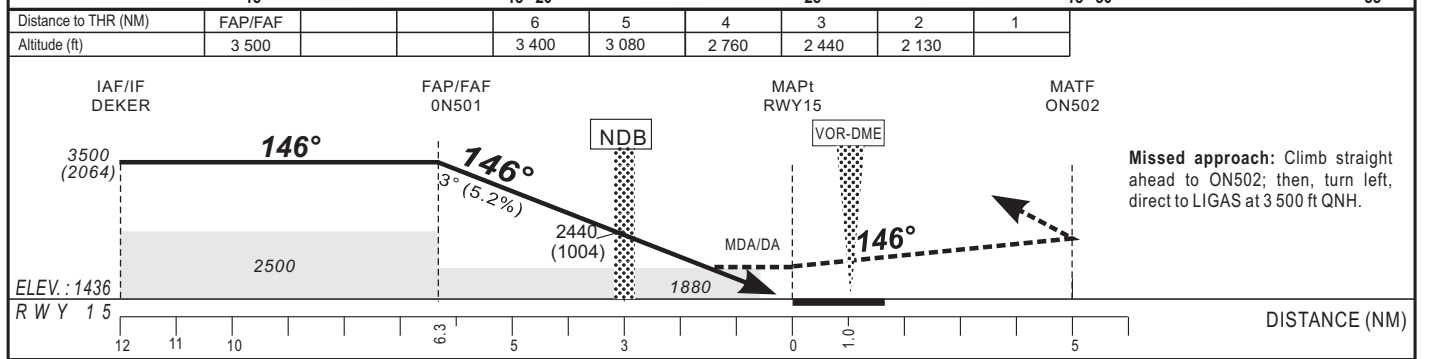


HEIGHTS RELATED TO THRESHOLD 15 ELEVATION

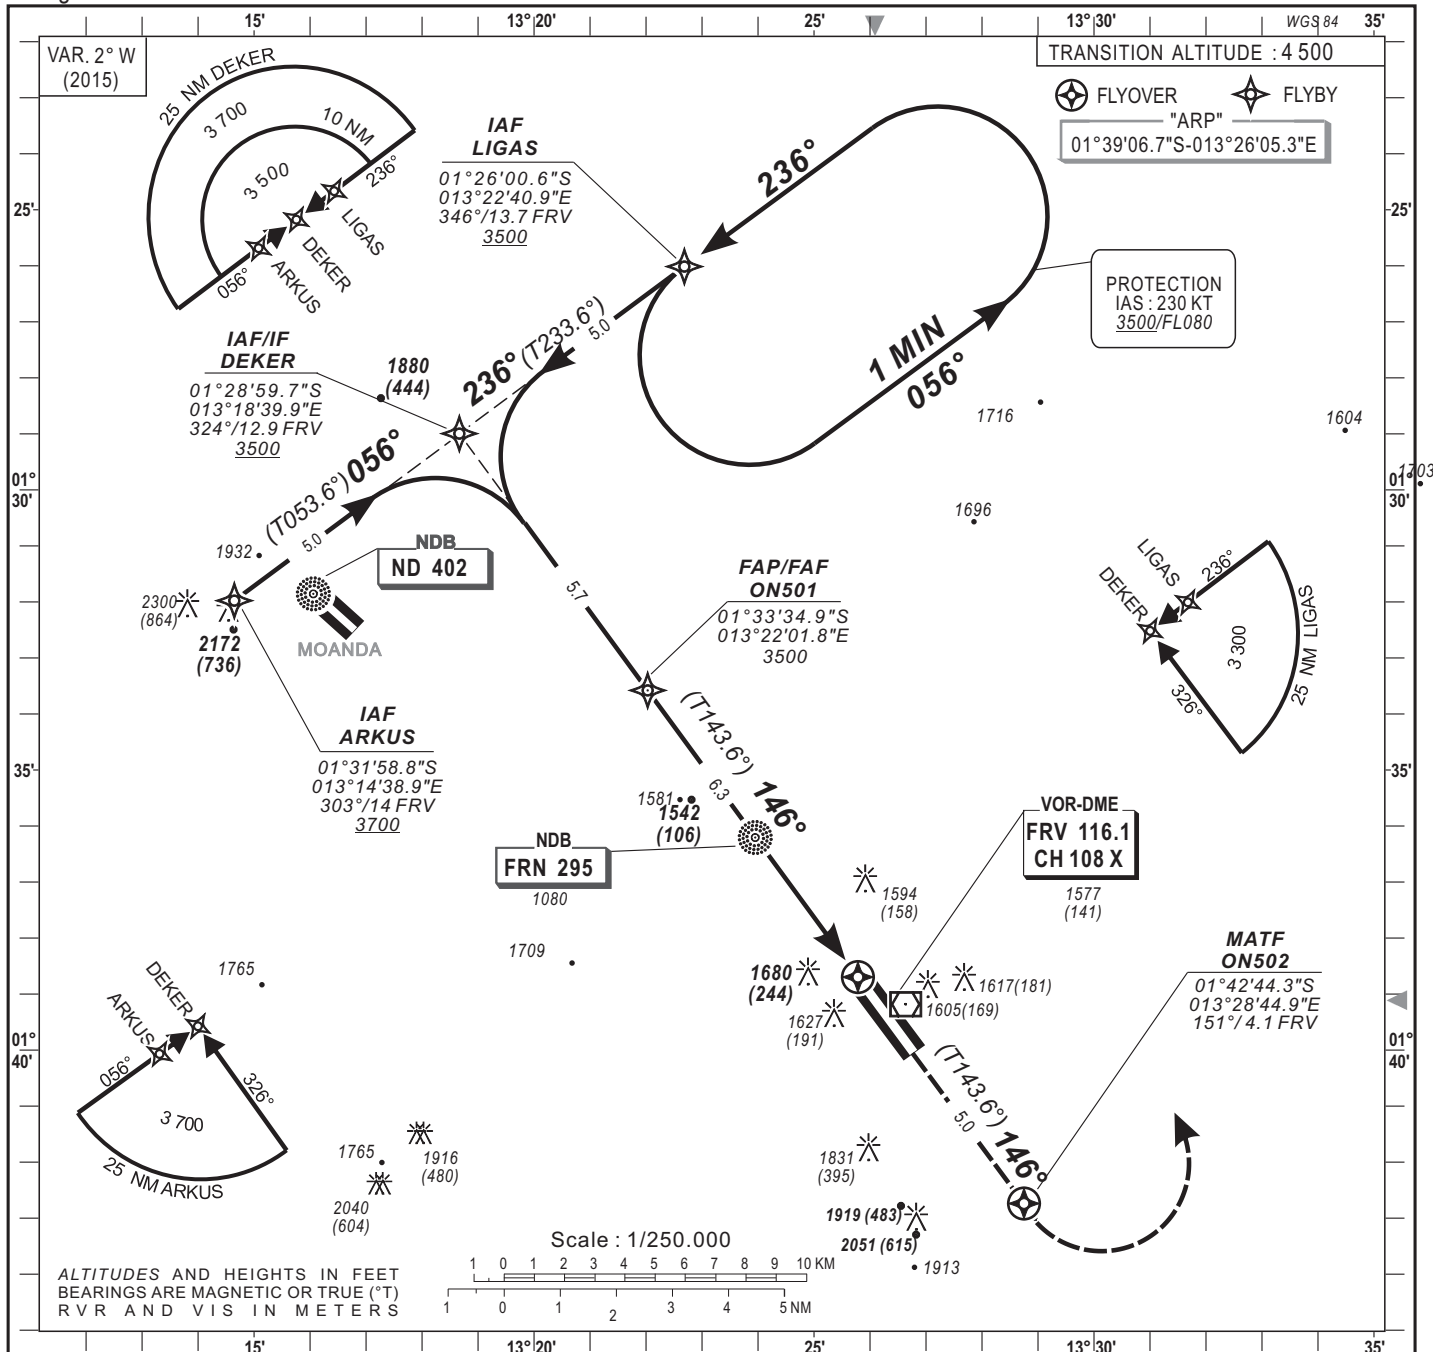

CAT	LNAV/VNAV				LNAV				CIRCLING (*)				RVR for take-off: CAT A - B - C : 400 CAT D : 400	
	OCA (OCH)	DA	DH	RVR(1)	RVR(2)	OCA (OCH)	MDA	MDH	RVR(1)	RVR(2)	OCA (OCH)	MDA		MDH
A	1879 (443)	1880 (450)	1000	1500	1871 (435)	1880 (440)	900	1500	2005 (555)	2010 (560)	1500	Timing FAF / THR 6.3 NM KT MIN SEC KT MIN SEC 90 4 Min 12 140 2 Min 42 100 3 Min 47 150 2 Min 31 110 3 Min 26 160 2 Min 22 120 3 Min 09 170 2 Min 13 130 2 Min 54 180 2 Min 06		
B	1879 (443)	1880 (450)	1200	1500	1871 (435)	1880 (440)	1000	1500	2215 (765)	2220 (770)	1600			
C	1879 (443)	1880 (450)	1200	2000	1871 (435)	1880 (440)	1000	1800	2445 (995)	2450 (1000)	2400			
D	1879 (443)	1880 (450)	1600	2000	1871 (435)	1880 (440)	1400	2000	2445 (995)	2450 (1000)	3600			

Notes : (1) With approach lights - (2) Without approach lights - (\*) Daytime only  
- (\*) Minimum temperature: 10°

AMDT 12/18 : NORMALIZATION