


Distance to ILS-DME	FAF	4	3	2
Altitude	1 500	1 275	960	640

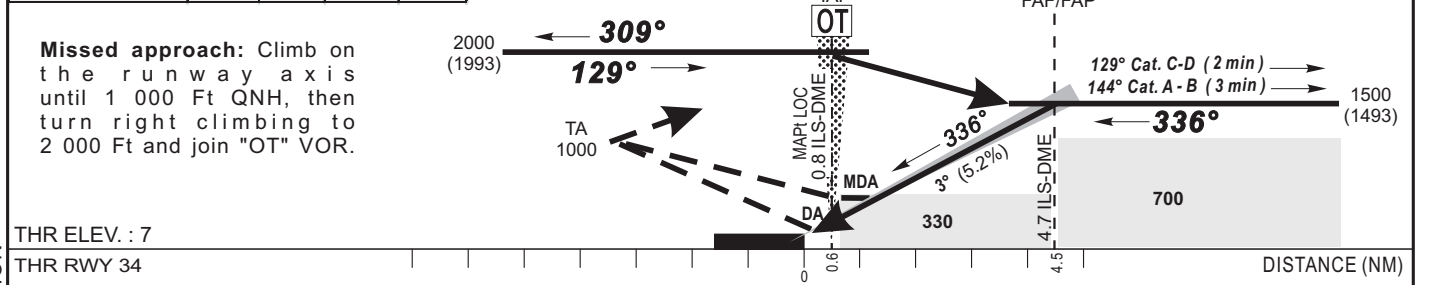

CAT	Cat.1				LOC				CIRCLING (3)				RVR for take-off CATA - B - C : 400 CAT D : 400	
	OCA (OCH)	DA	DH	RVR(1)	RVR(2)	OCA (OCH)	MDA	MDH	RVR(1)	RVR(2)	OCA (OCH)	MDA		MDH
A	137 (130)	210 (200)		550	1000	324 (317)	330 (320)		900	1500	450 (441)	460 (450)		1500
B	150 (143)	210 (200)		550	1000	324 (317)	330 (320)		1000	1500	512 (503)	520 (510)		1600
C	158 (151)	210 (200)		550	1000	324 (317)	330 (320)		1000	1800	611 (602)	620 (610)		2400
D	168 (161)	210 (200)		550	1000	324 (317)	330 (320)		1400	2000	611 (602)	710 (700)		3600

Timing FAF/THR: 4.5 NM

KT	MIN	SEC	KT	MIN	SEC
90	3	Min 00	140	1	Min 56
100	2	Min 42	150	1	Min 48
110	2	Min 27	160	1	Min 41
120	2	Min 15	170	1	Min 35
130	2	Min 05	180	1	Min 30

Notes : (1) With approach light - (2) Without approach light - (3) Daytime only.

AMDT 12/18: NORMALIZATION