


CARTE D'APPROCHE  
AUX INSTRUMENTS  
Catégories A-B

ELEV : 1197  
THR : 1196


APP : SARH Tower 118.1  
TWR : SARH Tower 118.1

SARH (FTTA)  
RNAV (GNSS) - RWY 22

HEIGHTS RELATED TO THR 22 ELEVATION

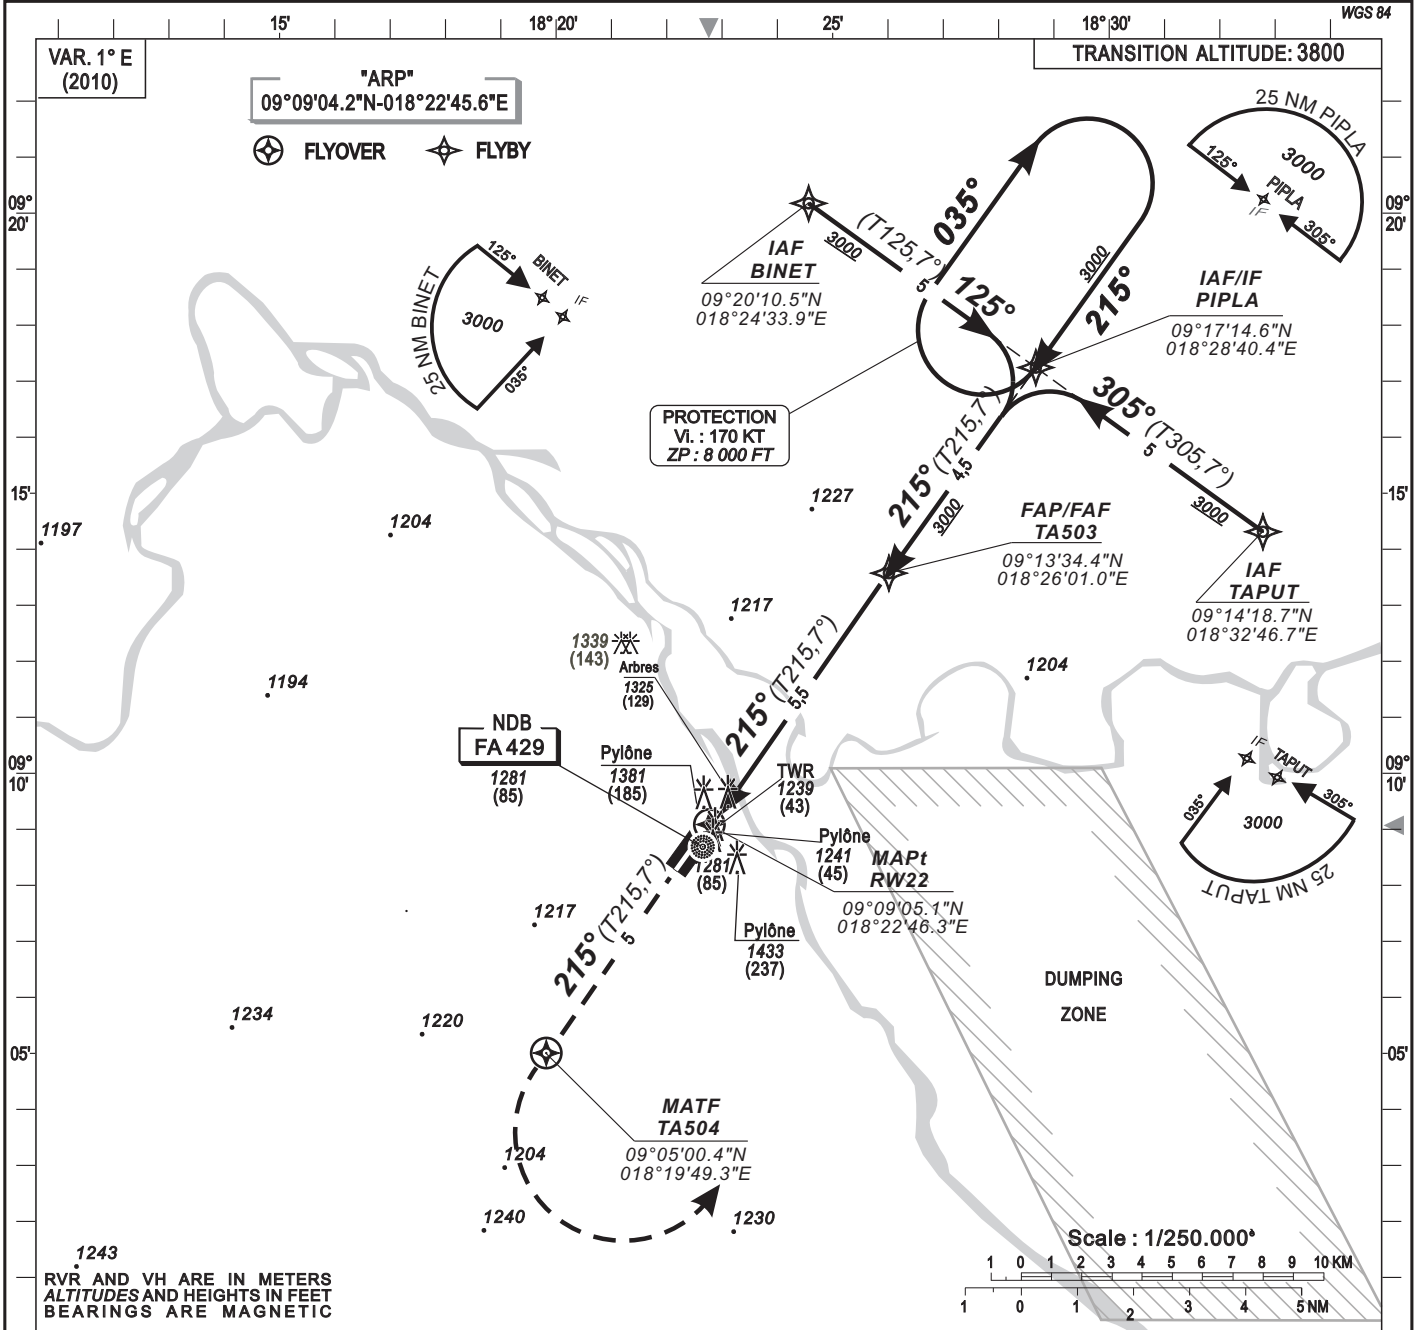

Distance to THR 04 (NM)	FAP/FAF	5	4	3	2	1
Altitude (ft)		3000	2840	2520	2200	1890

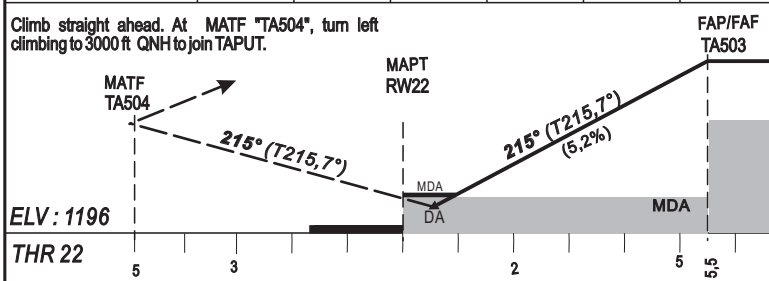

CAT	LNAV			LNAV/VNAV			CIRCLING (*)			RVR for take-off CATA - B : 250
	OCA (OCH)	MDA (MDH)	RVR	OCA (OCH)	DA (DH)	RVR	OCA (OCH)	MDA MDH	VH	
A	1680 (484)	1680 (490)	1500	1548 (352)	1550 (360)	1500	1728 (531)	1730 (540)	1500	Timing FAP / THR 5.5 NM KT MIN SEC KT MIN SEC 90 3 Min 40 140 100 3 Min 18 150 110 3 Min 00 160 120 2 Min 45 170 130 2 Min 32 180
B	1680 (484)	1680 (490)	1500	1548 (352)	1550 (360)	1500	1728 (531)	1730 (540)	1600	
C	-	-	-	-	-	-	-	-	-	
D	-	-	-	-	-	-	-	-	-	

Observations : - (\*) Daytime only  
- Minimum temperature : 15°C

PROCEDURE TO BE USED ACCORDING TO  
ORDER N° 37 / MTPT / SG / DAC / DNAM / 05 OF 29 JULY 2005.

RVR for take-off CATA - B : 250	
Timing FAP / THR 5.5 NM	
KT	MIN SEC
90	3 Min 40
100	3 Min 18
110	3 Min 00
120	2 Min 45
130	2 Min 32

AMDT 12/18: NORMALIZATION