


Distance to THR 03 (NM)	FAF/FAF	8	7	6	5	4	3	2	1
Altitude (ft)	3900		3780	3460	3150	2830	2510	2190	1870

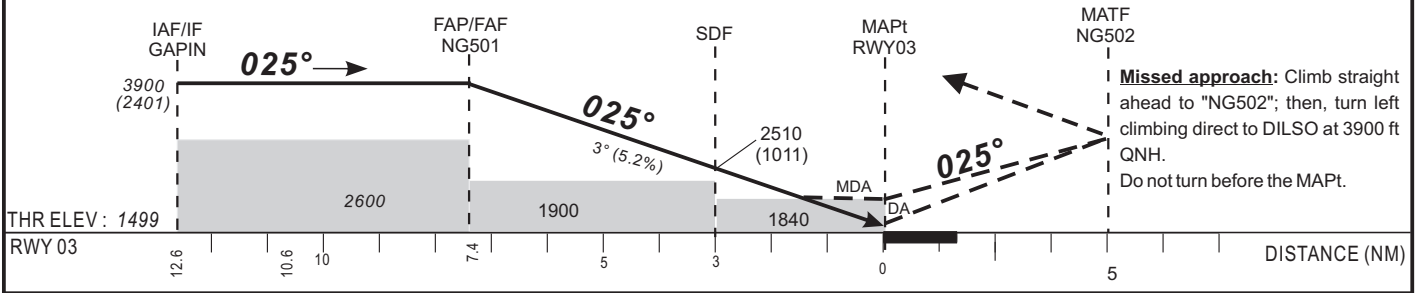

CAT	LNAV/VNAV				LNAV				Circling (3)				RVR for take off CAT A - B - C : 400 CAT D : 400						
	OCA (OCH)	DA	DH	RVR(1)	RVR(2)	OCA (OCH)	MDA	MDH	RVR(1)	RVR(2)	OCA (OCH)	MDA		MDH	VIS				
A	1818 (319)	1820 (320)	900	1500	1835 (336)	1840 (340)	900	1500	2008 (493)	2010 (500)	1500								
B	1818 (319)	1820 (320)	1000	1500	1835 (336)	1840 (340)	1000	1500	2011 (496)	2020 (500)	1600								
C	1818 (319)	1820 (320)	1000	1800	1835 (336)	1840 (340)	1000	1800	2573 (1058)	2580 (1060)	2400								
D	1818 (319)	1820 (320)	1400	2000	1835 (336)	1840 (340)	1400	2000	2691 (1176)	2700 (1180)	3600								
Notes : - (1) With approach lights - (2) Without approach lights - (3) Daytime Only - OCH and MDH AAL - RDH : 15 m - Minimum temperature : 10°C												Timing FAP / THR 7.4 NM							
												KT	MIN	SEC	KT	MIN	SEC		
												90	4	Min	56	140	3	Min	10
												110	4	Min	02	160	2	Min	46
												120	3	Min	42	170	2	Min	37
												130	3	Min	25	180	2	Min	28

AMDT 12/16: NORMALIZATION