

**AGENCE POUR LA SÉCURITÉ DE LA NAVIGATION AÉRIENNE EN AFRIQUE ET A
MADAGASCAR**

Phone : +(221) 76.026.88.15
+(221) 33.957.49.37
Fax : +(221) 33.820.06.00
AFTN : GOOONYX
E-mail : aim-gooo@asecna.org
Web : www.ais-asecna.org



**AIRAC AIP SUP
NR 20/B/26GO
22 JANUARY, 2026**

BUREAU NOTAM INTERNATIONAL DE L'OUEST AFRICAIN
B.P. 8155 Aéroport International Blaise DIAGNE Dakar/Diass – SENEGAL

BENIN – BURKINA FASO – COTE D'IVOIRE – GUINEE BISSAU – MALI – MAURITANIE – NIGER – SENEGAL – TOGO

MISE EN OEUVRE DES PROCEDURES DE VOL DE L'AERODROME DE TIDJIKJA

TIDJIKJA AERODROME FLIGHT PROCEDURES IMPLEMENTATION

GQND

/

MAURITANIE



MISE EN VIGUEUR / EFFECTIVE DATE	16 AVRIL 2026 / 16 APRIL 2026
VALIDITE / VALIDITY	PERM

FIN/END

INSTRUMENTS AERODROME ELEV : 1384
 APPROACH THR RWY 07 ELEV : 1332
 CHART-ICAO HEIGHTS RELATED TO THR RWY 07 ELEVATION

TIDJIKJA INFORMATION : 118.9 MHz

TIDJIKJA (GQND)
 RNP RWY 07
 ACFT CAT : A-B-C

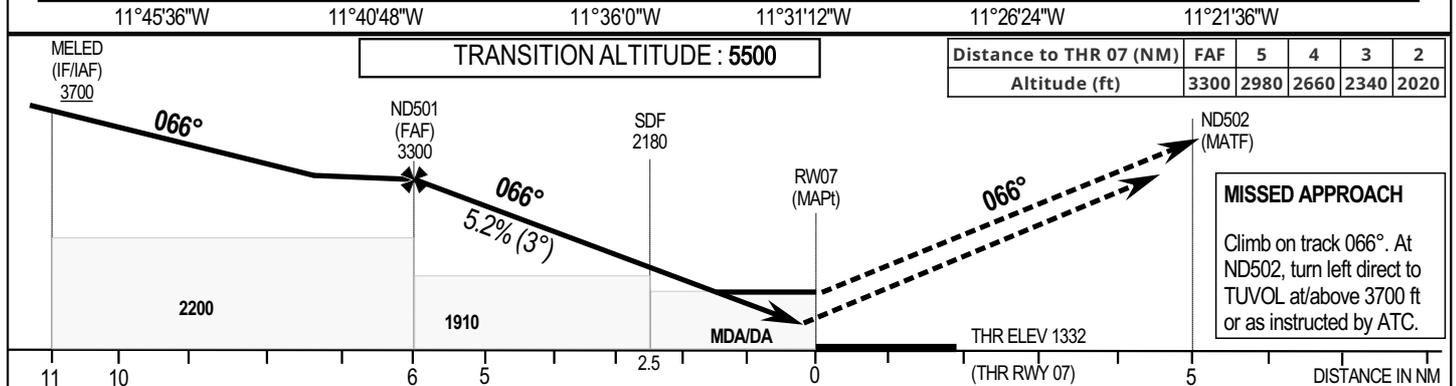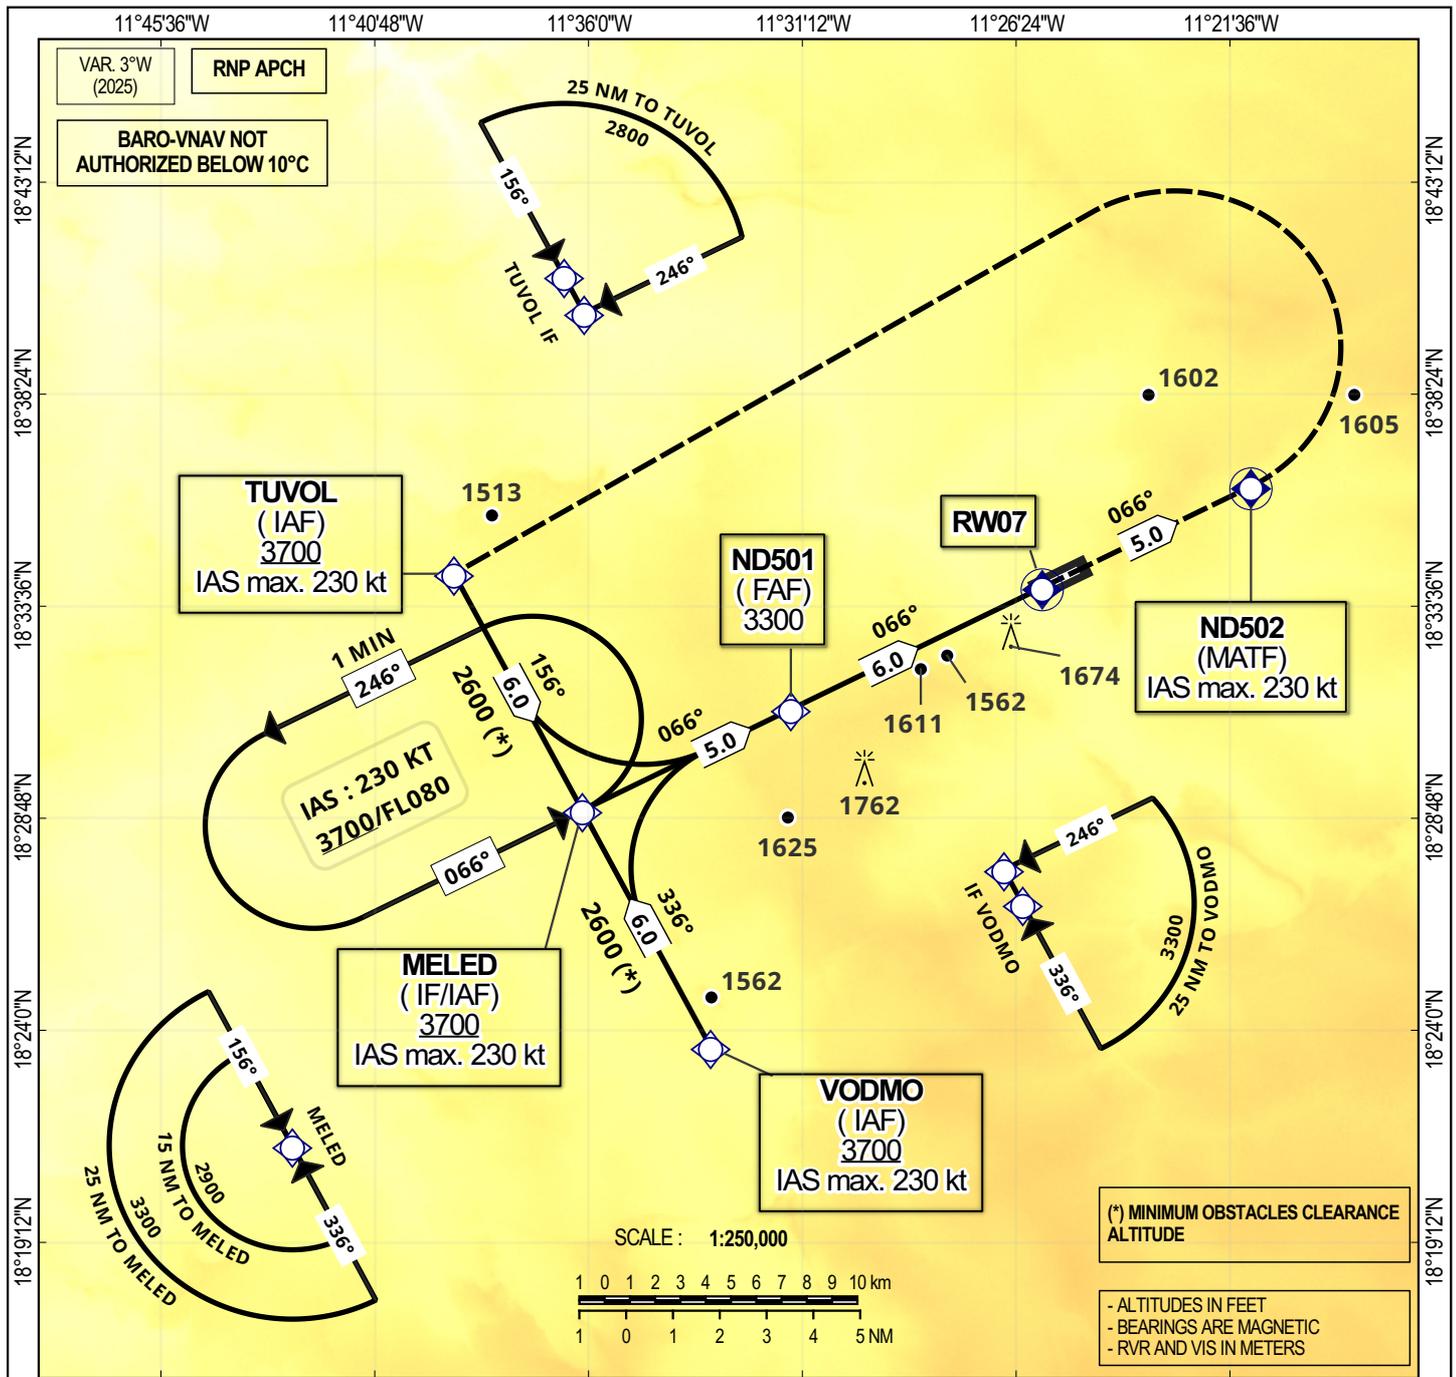

CAT	LNAV/VNAV			LNAV			CIRCLING (**)		
	OCA (OCH)	DA (DH)	RVR (*)	OCA (OCH)	MDA (MDH)	RVR (*)	OCA (OCH)	MDA (MDH)	VIS
A	1693 (361)	1700 (370)	1700	1857 (525)	1860 (530)	2400	1970 (638)	1970 (640)	2400
B	1694(362)	1700 (370)	1700				1970 (638)	1970 (640)	2400
C	1695 (363)	1700 (370)	1700				2074 (742)	2080 (750)	3600

Notes : (*) Without approach light (**) Day time only. OCH and MDH above AAL

RDH : 15 m

Timing FAF-THR : 06 NM

KT	MIN	SEC	KT	MIN	SEC
90	4	00	140	2	34
100	3	36	150	2	24
110	3	16	160	2	15
120	3	00	-	-	-
130	2	46	-	-	-

INSTRUMENTS AERODROME ELEV : 1384
 APPROACH THR RWY 07 ELEV : 1332
 CHART-ICAO HEIGHTS RELATED TO THR RWY 07 ELEVATION

TIDJIKJA INFORMATION 118.9 MHz

TIDJIKJA (GQND)
 RNP RWY 07
 ACFT CAT : A-B-C

TABULAR DESCRIPTION

RNP RWY 07

Serial number	Path descriptor	Waypoint identifier	Fly-Over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (kt)	VPA/TCH (°/m)	Navigation Specification
10	IF	TUVOL	-	-	-	-	-	+3700	-230	-	RNP APCH
20	TF	MELED	-	156 (152.8)	-	6	-	+3700	-230	-	RNP APCH
10	IF	VODMO	-	-	-	-	-	+3700	-230	-	RNP APCH
20	TF	MELED	-	336 (332.9)	-	6	-	+3700	-230	-	RNP APCH
10	IF	MELED	-	-	-	-	-	+3700	-230	-	RNP APCH
20	TF	ND501	-	066 (062.9)	-	5	-	@3300	-	-	RNP APCH
30	TF	RW07	Y	066 (062.9)	+3	6	-	@1382	-	-3.0/15	RNP APCH
40	CF	ND502	Y	066 (062.9)	-	5	-	-	-230	-	RNP APCH
50	DF	TUVOL	-	-	-	-	L	-	-230	-	RNP APCH
10	IF	MELED	-	-	-	-	-	+3700	-230	-	RNP APCH
20	HM	MELED	Y	066 (062.9)	-	-	L	+3700	-230	-	RNP APCH

WAYPOINTS LIST

RNP RWY 07


WAYPOINT IDENTIFIER	COORDINATES	
MELED	18°28'58.591"N	011°36'08.140"W
TUVOL	18°34'20.127"N	011°39'01.131"W
VODMO	18°23'37.007"N	011°33'15.328"W
RW07	18°34'01.502"N	011°25'48.487"W
ND501	18°31'16.013"N	011°31'27.239"W
ND502	18°36'18.667"N	011°21'07.311"W

INSTRUMENTS
APPROACH
CHART-ICAO

AERODROME ELEV : 1384
THR RWY 25 ELEV : 1384
HEIGHTS RELATED TO THR RWY 25 ELEVATION

APP: AFIS TIDJIKJA 118.9 MHz


TIDJIKJA (GQND)
RNP RWY 25
ACFT CAT : A-B-C

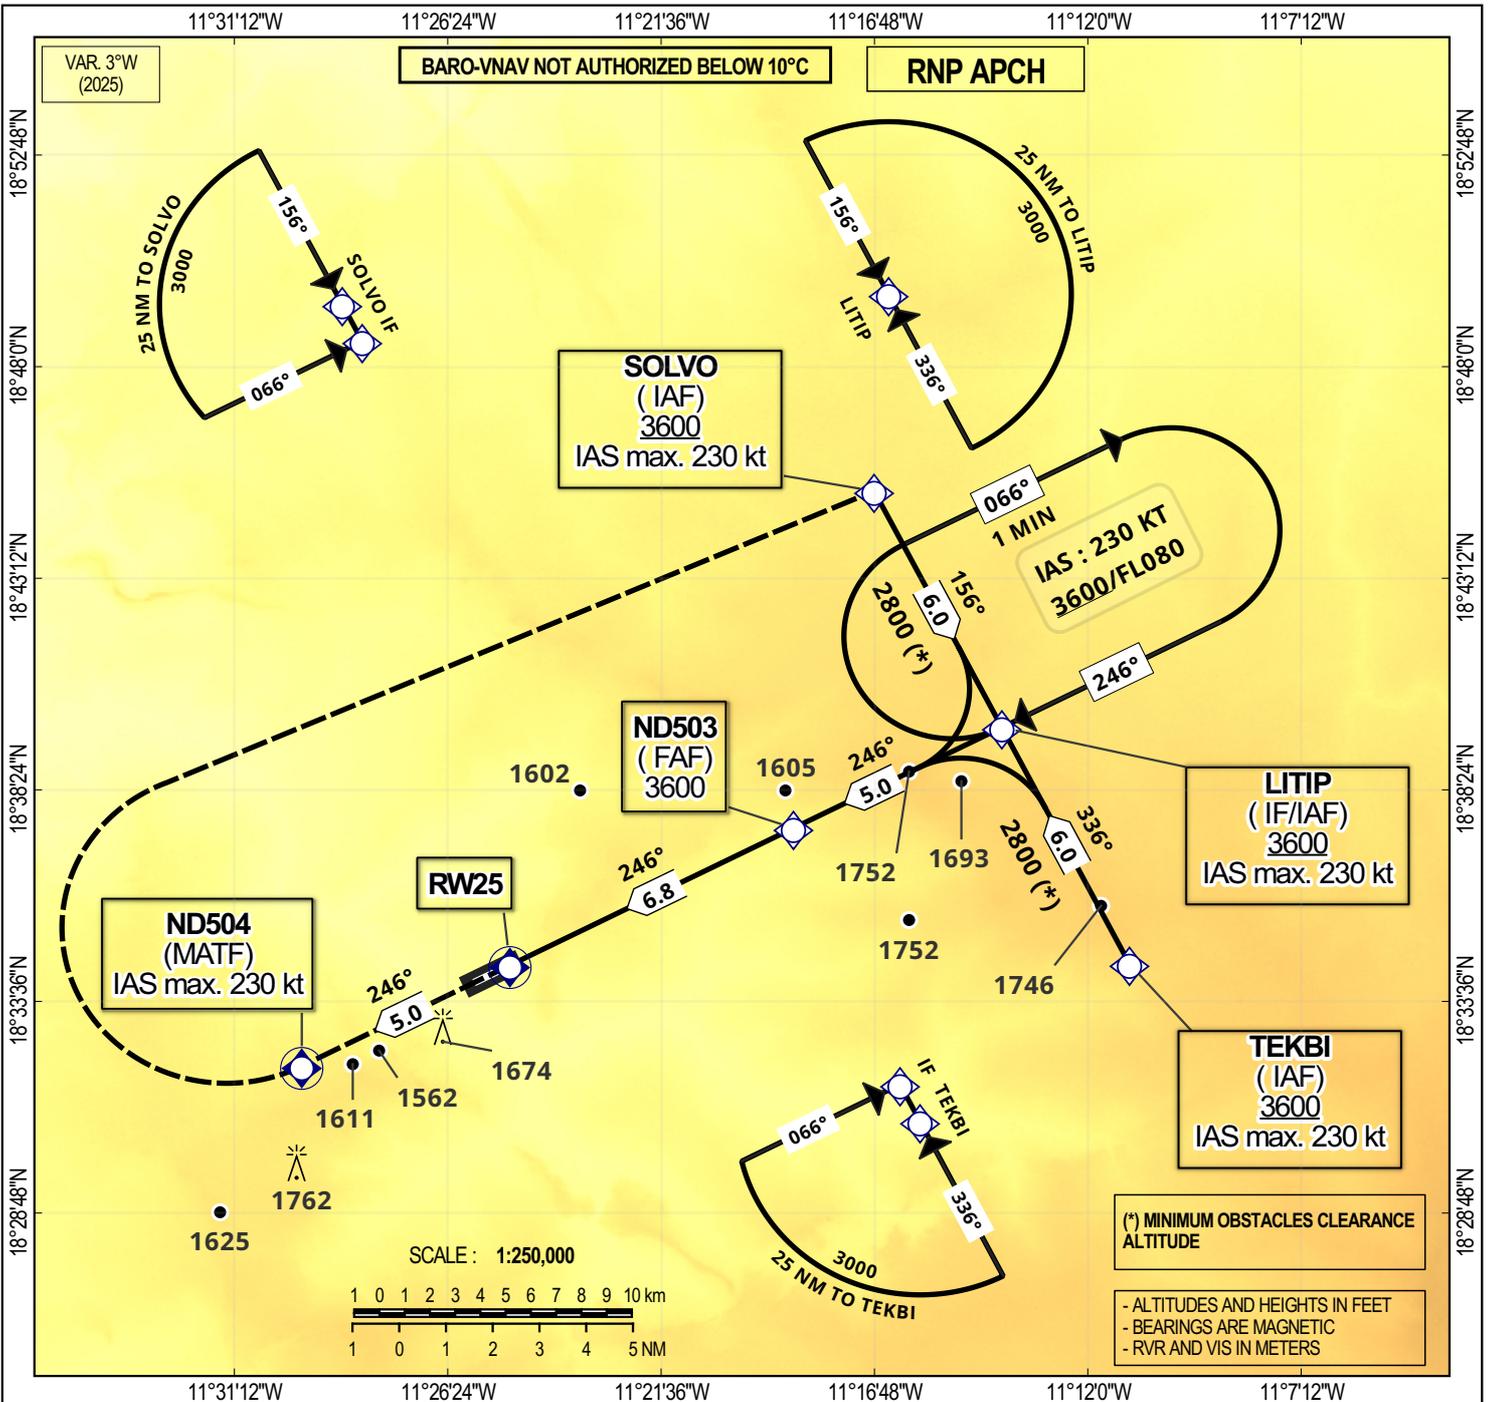

Distance to THR 25 (NM)	2	3	4	5	6	FAF
Altitude (ft)	2070	2390	2710	3030	3350	3600

TRANSITION ALTITUDE : 5500

MISSED APPROACH
Climb on track 246°. At ND504, turn right direct to SOLVO at/ above 3600 ft or as instructed by ATC.

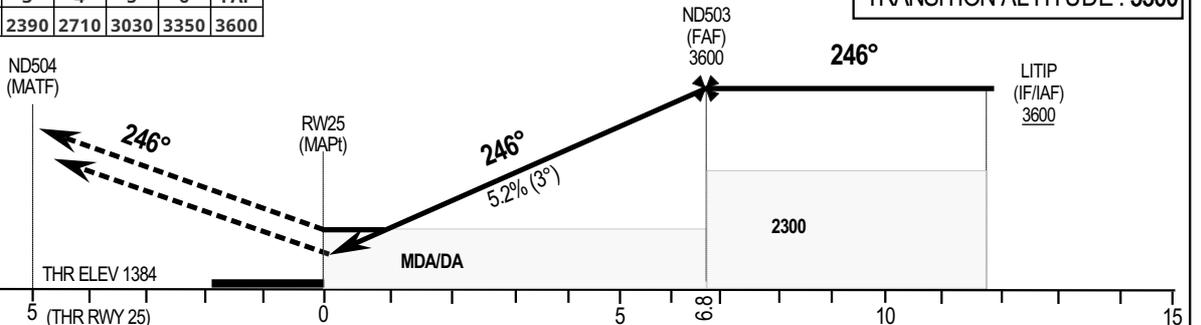

CAT	LNAV/VNAV			LNAV			CIRCLING (2)		
	OCA (OCH)	DA (DH)	RVR (1)	OCA (OCH)	MDA (MDH)	RVR (1)	OCA (OCH)	MDA (MDH)	VIS
A	1764 (380)	1770 (380)	1700				1970 (638)	1970 (640)	2400
B	1776 (392)	1780 (400)	1800	1900 (516)	1900 (520)	2400	1970 (638)	1970 (640)	2400
C	1785 (401)	1790 (410)	1900				2074 (742)	2080 (750)	3600

Timing FAF-THR : 6.8 NM

KT	MIN	SEC	KT	MIN	SEC
90	4	32	140	2	55
100	4	05	150	2	43
110	3	43	160	2	33
120	3	24	-	-	-
130	3	08	-	-	-

Notes : (1) Without approach light (2) Day time only. OCH and MDH above AAL RDH : 15 m

INSTRUMENTS
APPROACH
CHART-ICAO

AERODROME ELEV : 1384
THR RWY 25 ELEV : 1384
HEIGHTS RELATED TO THR RWY 25 ELEVATION

AFIS TIDJIKJA
118.9 MHz

TIDJIKJA (GQND)
RNP RWY 25
ACFT CAT : A-B-C

TABULAR DESCRIPTION

RNP RWY 25

Serial number	Path descriptor	Waypoint identifier	Fly-Over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (kt)	VPA/TCH (°/m)	Navigation Specification
10	IF	SOLVO	-	-	-	-	-	+3600	-230	-	RNP APCH
20	TF	LITIP	-	156 (153)	-	6	-	+3600	-230	-	RNP APCH
10	IF	TEKBI	-	-	-	-	-	+3600	-230	-	RNP APCH
20	TF	LITIP	-	336 (333.0)	-	6	-	+3600	-230	-	RNP APCH
10	IF	LITIP	-	-	-	-	-	+3600	-230	-	RNP APCH
20	TF	ND503	-	246 (243)	-	5	-	@3600	-	-	RNP APCH
30	TF	RW25	Y	246 (243)	+3	6.8	-	@1434	-	-3.0/15	RNP APCH
40	CF	ND504	Y	246 (243)	-	5	-	-	-230	-	RNP APCH
50	DF	SOLVO	-	-	-	-	R	-	-230	-	RNP APCH
10	IF	LITIP	-	-	-	-	-	+3600	-230	-	RNP APCH
20	HM	LITIP	Y	246 (243)	-	-	R	+3600	-230	-	RNP APCH

WAYPOINTS LIST

RNP RWY 25

WAYPOINT IDENTIFIER	COORDINATES	
SOLVO	18°45'10.691"N	011°16'48.284"W
LITIP	18°39'48.822"N	011°13'55.804"W
TEKBI	18°34'26.905"N	011°11'03.505"W
RW25	18°34'25.208"N	011°24'59.918"W
ND503	18°37'31.836"N	011°18'37.172"W
ND504	18°32'07.946"N	011°29'40.990"W