

Phone : +(242) 05 377 95 54
 +(242) 05 377 95 64
 AFTN : FCCCCNYX
 E-mail : bnibrazza@yahoo.fr:
 aim-fccc@asecna.org
 Web : https://aim.asecna.aero



**BUREAU NOTAM INTERNATIONAL
 DE L'AFRIQUE CENTRALE**

B.P. 660 BRAZZAVILLE - CONGO

CAMEROUN – CENTRAFRIQUE – CONGO – GABON – GUINEE ÉQUATORIALE – SAO TOME – TCHAD

AIRAC AIP SUP

NR 111/A/25FC

30 OCT 2025

POINTE-NOIRE/A. AGOSTINHO NETO - FCPP

MISE A JOUR DES PROCEDURES DE VOL FLIGHT PROCEDURES UPDATE

Effective date	22 JAN 2026
Validity	PERM

Ce Supplément d'AIP a pour objet d'informer les usagers sur la mise à jour des procédures de vols révisées de l'aéroport Antonio Agostinho Neto de Pointe-Noire.



The purpose of this AIP Supplement is to inform users about revised flight procedures update of Antonio Agostinho Neto airport in Pointe-Noire

AD2.24 FCPP — AERODROMES CHARTS

	NEW CHARTS INSERTION Revised IFR flight procedures	CHARTS WITHDRAWAL These current charts in eAIP shall be replaced by the revised procedures and shall be no more available.	CHARTS SUSPENSION The following charts in eAIP will be Suspended when revised procedures shall be in force.
AIP ASECNA	– 05AD2-FCPP-IAC-ILSX17 – 05AD2-FCPP-IAC-ILSX17-DATA – 05AD2-FCPP-IAC-ILSZ17 – 05AD2-FCPP-IAC-VORZ17 – 05AD2-FCPP-IAC-VORZ35 – 05AD2-FCPP-IAC-RNP17 – 05AD2-FCPP-IAC-RNP17-DATA – 05AD2-FCPP-IAC-RNP35 – 05AD2-FCPP-IAC-RNP35-DATA	– 05AD2-FCPP-IAC-ILSX17 – 05AD2-FCPP-IAC-ILSZ17 – 05AD2-FCPP-IAC-VORZ17 – 05AD2-FCPP-IAC-VORZ35 – 05AD2-FCPP-IAC-RNAV17 – 05AD2-FCPP-IAC-RNAV35	– 05AD2-FCPP-STAR-RNAV17 – 05AD2-FCPP-STAR-RNAV35 – 05AD2-FCPP-STAR-VOR17 – 05AD2-FCPP-STAR-VOR35 – 05AD2-FCPP-IAC-ILSY17 – 05AD2-FCPP-IAC-VORY17 – 005AD2-FCPP-IAC-VORY35

**CE SUP AIP COMPORTE 01 PAGE ET 09 ANNEXES /
 THIS AIP SUP HAS 01 PAGE ANDS 09 ANNEXES**

POINTE NOIRE (FCPP)
ILSX or LOCX RWY 17
 IDENT ILS "PN" FREQ. 109.3 MHZ

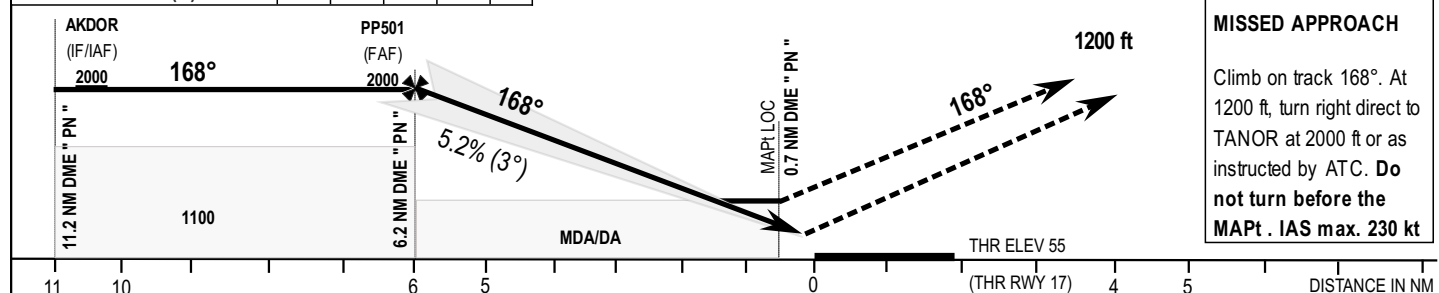

CAT	CAT I				LOC DME				CIRCLING (3)			RVR for take-off: CAT A-B-C: 175 CAT D : 300																
	OCA (OCH)	DA (DH)	RVR (1)	RVR (2)	OCA (OCH)	MDA (MDH)	RVR (1)	RVR (2)	OCA (OCH)	MDA (MDH)	VIS																	
A	294 (239)	300 (240)	600	1000	458 (403)	460 (410)	900	1500	530 (475)	530 (480)	1500	Timing FAF-THR : 06 NM <table><tr><th>KT</th><th>MIN SEC</th><th>KT</th><th>MIN SEC</th></tr><tr><td>90</td><td>4 Min 00</td><td>140</td><td>2 Min 34</td></tr><tr><td>100</td><td>3 Min 36</td><td>150</td><td>2 Min 24</td></tr><tr><td>110</td><td>3 Min 16</td><td>160</td><td>2 Min 15</td></tr></table>	KT	MIN SEC	KT	MIN SEC	90	4 Min 00	140	2 Min 34	100	3 Min 36	150	2 Min 24	110	3 Min 16	160	2 Min 15
KT	MIN SEC	KT	MIN SEC																									
90	4 Min 00	140	2 Min 34																									
100	3 Min 36	150	2 Min 24																									
110	3 Min 16	160	2 Min 15																									
B	306 (251)	310 (260)	650	1200	458 (403)	460 (410)	1000	1500	624 (569)	630 (570)	1600																	
C	315 (260)	320 (260)	650	1200	458 (403)	460 (410)	1000	1800	845 (790)	850 (790)	2400																	
D	325 (270)	330 (270)	650	1200	458 (403)	460 (410)	1400	2000	883 (828)	890 (830)	3600																	

Notes : (1) With approach light	(2) Without approach light	(3) Day time only. OCH and MDH above AAL	RDH : 15 m	120	3 Min 00	170	2 Min 07
				130	2 Min 46	180	2 Min 00

22 JAN 2026

AERONAUTICAL INFORMATION SERVICE-ASECNA

05AD2-FCPP-IAC-ILSX-LOCX-RWY17

AIRAC AIR SUP NR 111/A/25EC


Annex 1/B

TABULAR DESCRIPTION											
ILSX or LOCX RWY 17											
Serial number	Path descriptor	Waypoint identifier	Fly-Over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (kt)	VPA/TCH (°/m)	Navigation Specification
10	IF	TANOR	-	-	-	-	-	+2000	-230	-	RNP APCH
20	TF	AKDOR	-	078 (076)	-	5	-	+2000	-230	-	RNP APCH
10	IF	MEKIS	-	-	-	-	-	+2000	-230	-	RNP APCH
20	TF	AKDOR	-	258 (256)	-	5	-	+2000	-230	-	RNP APCH
10	IF	AKDOR	-	-	-	-	-	+2000	-230	-	RNP APCH
20	TF	PP501	-	168 (166)	-	5	-	@2000	-	-	-
30	TF	RW17	Y	168 (166)	+2	-	-	@105	-	-3.0/15	-
40	CA	-	-	168 (166)	-	-	-	@1200	-230	-	RNP APCH
50	DF	TANOR	-	-	-	-	R	+2000	-230	-	RNP APCH
10	IF	AKDOR	-	-	-	-	-	+2000	-230	-	RNP APCH
20	HM	AKDOR	Y	168 (166)	-	-	R	+2000	-230	-	RNP APCH

WAYPOINTS LIST		
ILSX or LOCX RWY 17		
WAYPOINT IDENTIFIER	COORDINATES	
TANOR	04°38'48.772"S	011°45'30.750"E
AKDOR	04°37'35.857"S	011°50'22.268"E
MEKIS	04°36'22.907"S	011°55'13.770"E
RW17	04°48'16.620"S	011°53'01.533"E
PP501	04°42'28.361"S	011°51'34.961"E

CHANGE: NEW EDITION

POINTE NOIRE (FCPP)
ILSZ or LOCZ RWY 17
 IDENT ILS "PN" FREQ. 109.3 MHZ


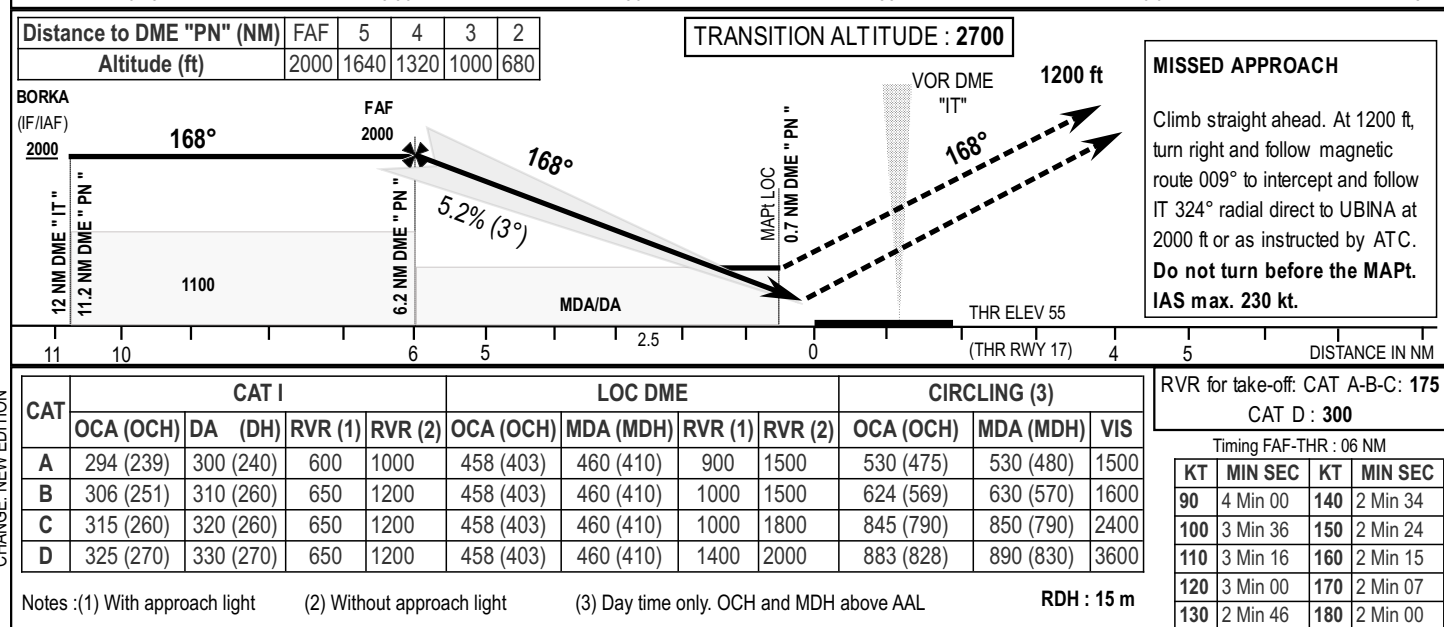


CHANGE: NEW EDITION

INSTRUMENTS AERODROME ELEV : 55
APPROACH THR RWY 17 ELEV : 55
CHART-ICAO HEIGHTS RELATED TO THR RWY 17 ELEVATION

APP : Pointe Noire Tower : 124.3 MHz
TWR : Pointe Noire Tower : 124.3 MHz

POINTE NOIRE (FCPP)
RNP RWY 17
ACFT CAT : A-B-C-D

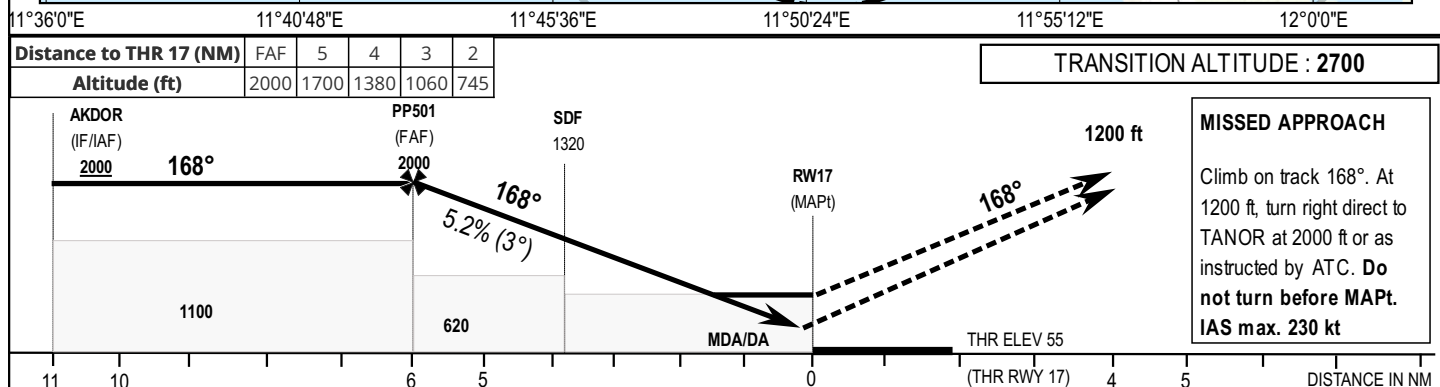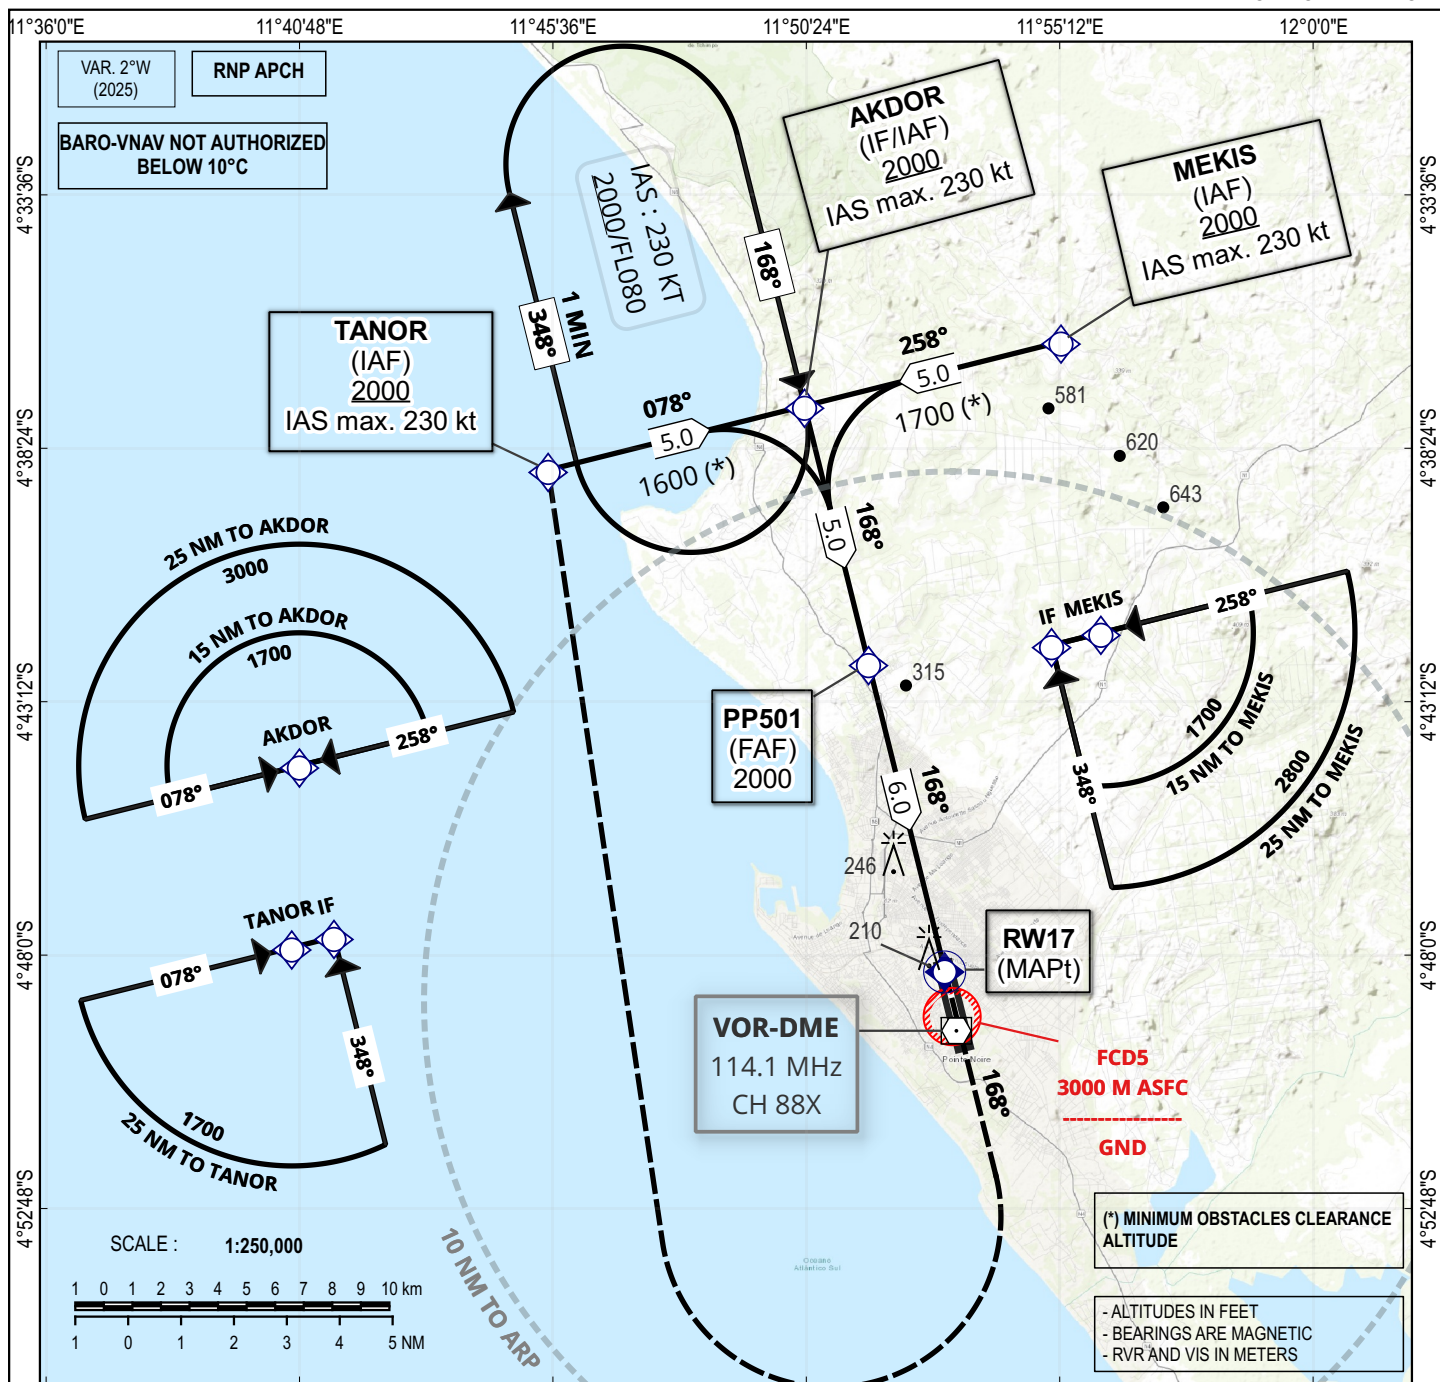

CAT	LNAV/VNAV				LNAV				CIRCLING (3)		
	OCA (OCH)	DA (DH)	RVR (1)	RVR (2)	OCA (OCH)	MDA (MDH)	RVR (1)	RVR (2)	OCA (OCH)	MDA (MDH)	VIS
A	340 (285)	340 (290)	650	1400	493 (438)	500 (440)	900	1500	530 (475)	530 (480)	1500
B	353 (298)	360 (300)	650	1400	493 (438)	500 (440)	1000	1500	624 (569)	630 (570)	1600
C	361 (306)	370 (310)	700	1400	493 (438)	500 (440)	1000	2000	845 (790)	850 (790)	2400
D	371 (316)	380 (320)	700	1400	493 (438)	500 (440)	1400	2000	883 (828)	890 (830)	3600

Notes : (1) With approach light 2) Without approach light (**) Day time only. OCH and MDH above AAL RDH : 15 m

TABULAR DESCRIPTION											
RNP RWY 17											
Serial number	Path descriptor	Waypoint identifier	Fly-Over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (kt)	VPA/TCH (°/m)	Navigation Specification
10	IF	TANOR	-	-	-	-	-	+2000	-230	-	RNP APCH
20	TF	AKDOR	-	078 (076)	-	5	-	+2000	-230	-	RNP APCH
10	IF	MEKIS	-	-	-	-	-	+2000	-230	-	RNP APCH
20	TF	AKDOR	-	258 (256)	-	5	-	+2000	-230	-	RNP APCH
10	IF	AKDOR	-	-	-	-	-	+2000	-230	-	RNP APCH
20	TF	PP501	-	168 (166)	-	5	-	@2000	-	-	RNP APCH
30	TF	RW17	Y	168 (166)	+2	6	-	@105	-	-3.0/15	RNP APCH
40	CA	-	-	168 (166)	-	-	-	@1200	-230	-	RNP APCH
50	DF	TANOR	-	-	-	-	R	+2000	-230	-	RNP APCH
10	IF	AKDOR	-	-	-	-	-	+2000	-230	-	RNP APCH

WAYPOINTS LIST		
RNP RWY 17		
WAYPOINT IDENTIFIER	COORDINATES	
TANOR	04°38'48.772"S	011°45'30.750"E
AKDOR	04°37'35.857"S	011°50'22.268"E
MEKIS	04°36'22.907"S	011°55'13.770"E
RW17	04°48'16.620"S	011°53'01.533"E
PP501	04°42'28.361"S	011°51'34.961"E


CHANGE: NEW EDITION

INSTRUMENTS
APPROACH
CHART-ICAO

AERODROME ELEV : 55
THR RWY 35 ELEV : 52
HEIGHTS RELATED TO THR RWY 35 ELEVATION

APP : Pointe Noire Tower : 124.3 MHz
TWR : Pointe Noire Tower : 124.3 MHz

POINTE NOIRE (FCPP)
RNP RWY 35
ACFT CAT : A-B-C-D

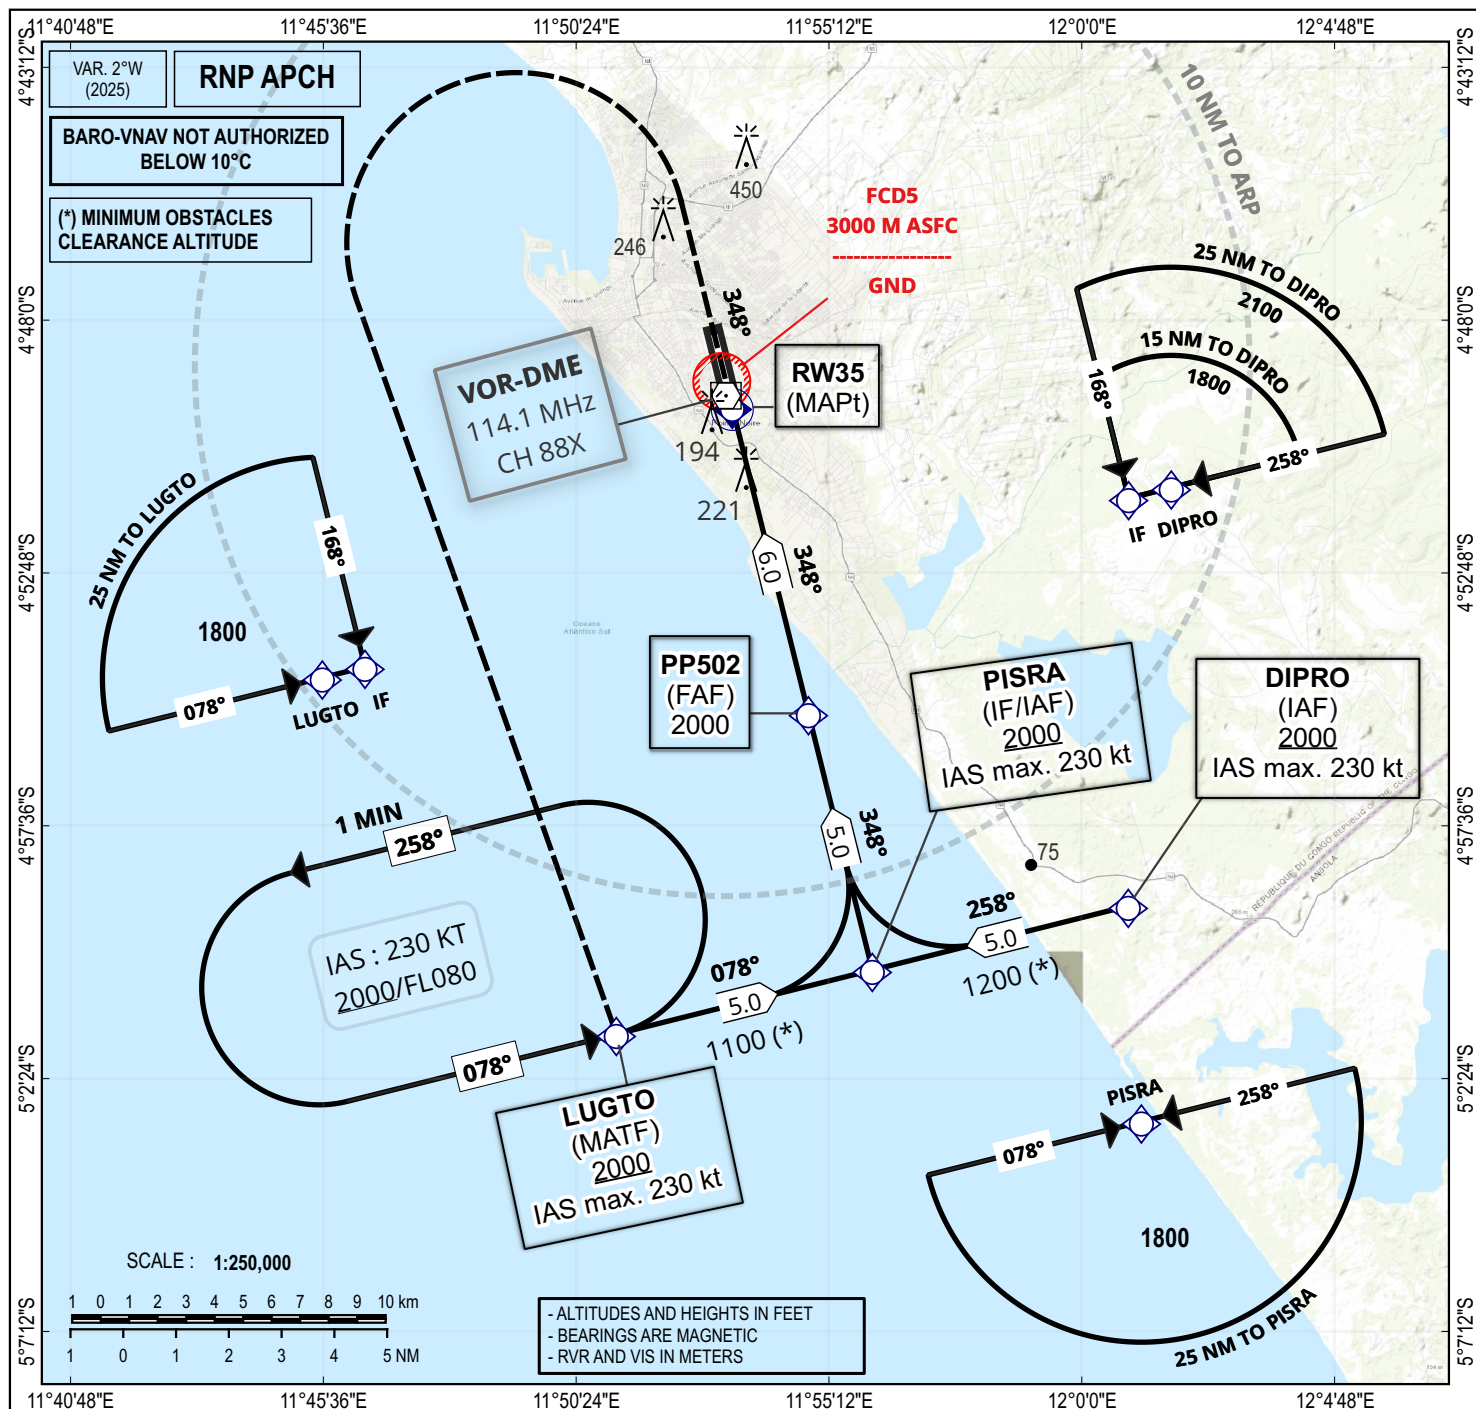

Distance to THR 35 (NM)	2	3	4	5	FAF
Altitude (ft)	740	1060	1380	1700	2000

MISSED APPROACH

Climb on track 348°. At 1200 ft, turn left direct to LUGTO at 2000 ft or as instructed by ATC. Do not turn before the MAPt. IAS max. 230 kt.

1200 ft

348°

RW35 (MAPt)

348°
5.2% (3°)

MDA/DA

THR ELEV 52
(THR RWY 35)

TRANSITION ALTITUDE : 2700

PP502
(FAF)
2000

PISRA
(IF/IAF)
2000

348°

800

DISTANCE IN NM

CAT	LNAV/VNAV			LNAV			CIRCLING (2)		
	OCA (OCH)	DA (DH)	RVR (1)	OCA (OCH)	MDA (MDH)	RVR (1)	OCA (OCH)	MDA (MDH)	VIS
A	323 (271)	330 (280)	1300	468 (416)	470 (420)	1500	530 (475)	530 (480)	1500
B	336 (284)	340 (290)	14000	468 (416)	470 (420)	1500	624 (569)	630 (570)	1600
C	344 (292)	350 (300)	1400	468 (416)	470 (420)	1800	845 (790)	850 (790)	2400
D	354 (302)	360 (310)	1400	468 (416)	470 (420)	2000	883 (828)	890 (830)	3600

RVR for take-off: CAT A-B-C: 175
CAT D : 300

Timing FAF-THR : 6 NM

KT	MIN	SEC	KT	MIN	SEC
90	4	Min 00	140	2	Min 34
100	3	Min 36	150	2	Min 24
110	3	Min 16	160	2	Min 15
120	3	Min 00	170	2	Min 07

Notes : (1) Without approach light

(2) Day time only. OCH and MDH above AAL

RDH : 15 m

TABULAR DESCRIPTION

RNP RWY 35

Serial number	Path descriptor	Waypoint identifier	Fly-Over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (kt)	VPA/TCH (°/m)	Navigation Specification
10	IF	LUGTO	-	-	-	-	-	+2000	-230	-	RNP APCH
20	TF	PISRA	-	078 (076)	-	5	-	+2000	-230	-	RNP APCH
10	IF	DIPRO	-	-	-	-	-	+2000	-230	-	RNP APCH
20	TF	PISRA	-	258 (256)	-	5	-	+2000	-230	-	RNP APCH
10	IF	PISRA	-	-	-	-	-	+2000	-230	-	RNP APCH
20	TF	PP502	-	348 (346)	-	5	-	@2000	-	-	RNP APCH
30	TF	RW35	Y	348 (346)	+2	6	-	@102	-	-3.0/15	RNP APCH
40	CA	-	-	348 (346)	-	-	-	@1200	-230	-	RNP APCH
50	DF	LUGTO	-	-	-	-	L	+2000	-230	-	RNP APCH
10	IF	PISRA	-	-	-	-	-	+2000	-230	-	RNP APCH
20	HM	PISRA	Y	078 (076)	-	-	L	+2000	-230	-	RNP APCH

WAYPOINTS LIST



RNP RWY 35

WAYPOINT IDENTIFIER	COORDINATES	
LUGTO	05°01'33.427"S	011°51'09.883"E
DIPRO	04°59'07.483"S	012°00'53.206"E
PISRA	05°00'20.473"S	011°56'01.553"E
RW35	04°49'39.056"S	011°53'22.029"E
PP502	04°55'27.979"S	011°54'48.797"E

INSTRUMENTS AERODROME ELEV : 55
APPROACH THR RWY 17 ELEV : 55
CHART-ICAO HEIGHTS RELATED TO AERODROME ELEVATION

APP : Pointe Noire Tower : 124.3 MHz
TWR : Pointe Noire Tower : 124.3 MHz

POINTE NOIRE (FCPP)
VORZ RWY 17
ACFT CAT : A-B-C-D

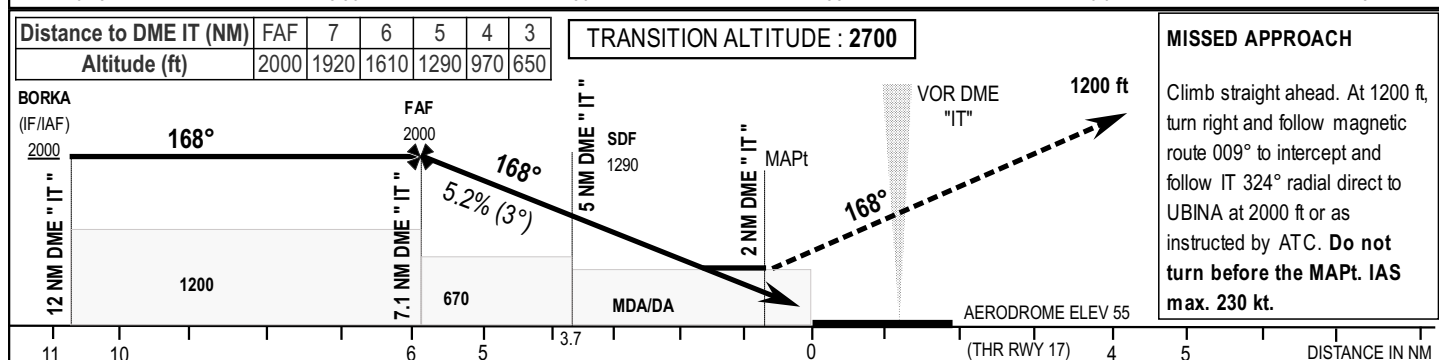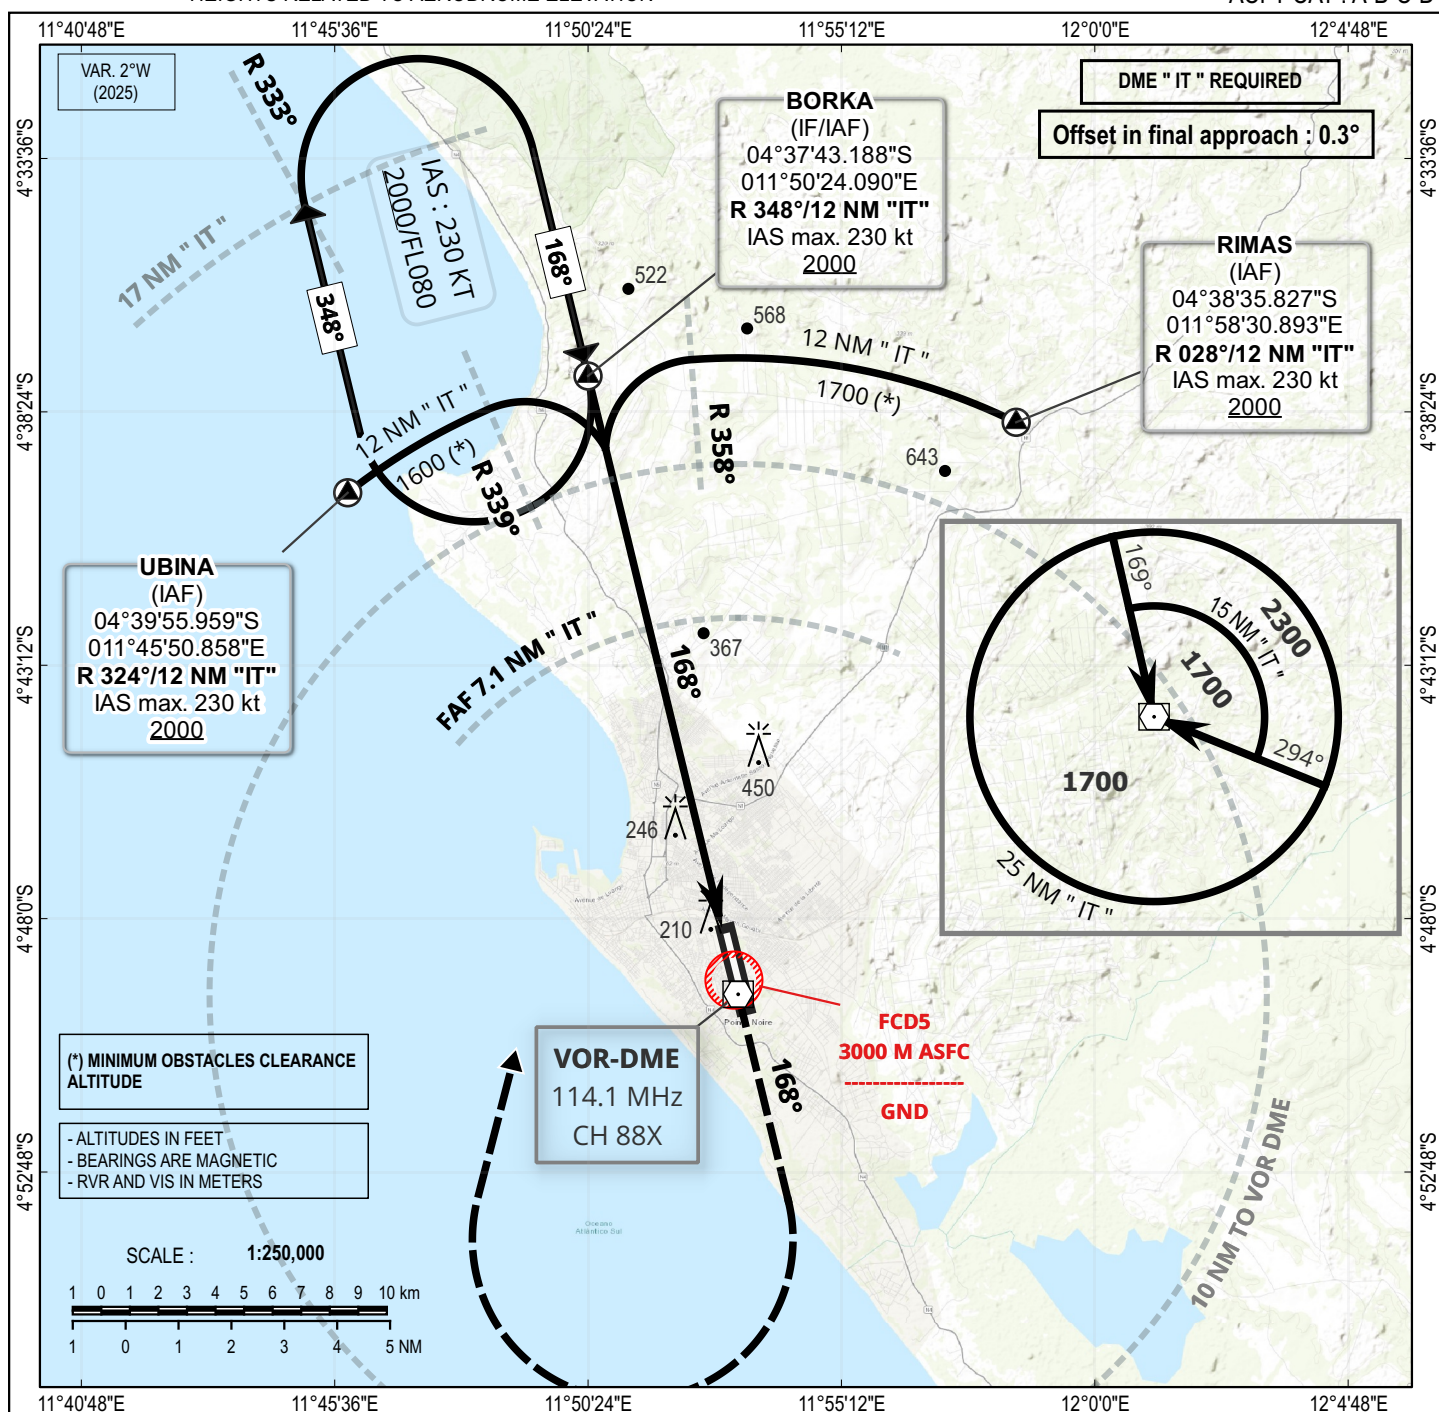

CAT	VOR DME				CIRCLING (3)			RVR for take-off: CAT A-B-C: 175 CAT D : 300	Timing FAF-THR : 5.8 NM					
	OCA (OCH)	MDA (MDH)	RVR (1)	RVR (2)	OCA (OCH)	MDA (MDH)	VIS		KT	MIN	SEC	KT	MIN	SEC
A	512 (457)	520 (460)	1000	1500	530 (475)	530 (480)	1500							
B	512 (457)	520 (460)	1200	1500	624 (569)	630 (570)	1600		90	3	Min 52	140	2	Min 29
C	512 (457)	520 (460)	1200	2000	845 (790)	850 (790)	2400		100	3	Min 29	150	2	Min 19
D	512 (457)	520 (460)	1600	2000	883 (828)	890 (830)	3600		110	3	Min 10	160	2	Min 10
								RDH : 15 m	120	2	Min 54	170	2	Min 03
									130	2	Min 41	180	1	Min 56

Notes : (1) With approach light (2) Without approach light (3) Day time only. OCH and MDH above AAL

POINTE NOIRE (FCPP)
VORZ RWY 35
 ACFT CAT : A-B-C-D

