

Phone : +(221) 76.026.88.15
 +(221) 33.957.49.37
 Fax : +(221) 33.820.06.00
 AFTN : GOOOYNYX
 E-mail : aim-gooo@asecna.org
 Web : <https://ais.asecna.aero>



AIRAC AIP SUP
NR 76/A/25GO
09 SEPTEMBER, 2025

BUREAU NOTAM INTERNATIONAL DE L'OUEST AFRICAIN
 B.P. 8155 Aéroport International Blaise DIAGNE Dakar/Diass-SENEGAL

BENIN – BURKINA FASO – COTE D'IVOIRE – GUINEE BISSAU – MALI – MAURITANIE – NIGER – SENEGAL – TOGO

MISE A JOUR DES PROCEDURES DE VOL DE L'AEROPORT DE BOBO - DIOULASSO

UPDATE OF FLIGHT PROCEDURES OF BOBO - DIOULASSO AIRPORT

DFOO
/

BURKINA FASSO

Mise en vigueur/Effective Date	27 Novembre 2025/November 27, 2025
Validité/Validity	PERM

Ce supplément a pour objectif d'informer les usagers de la mise à jour des procédures de vols de l'aérodrome de Bobo-Dioulasso.

This supplement is published to inform users of the update of flight procedures of Bobo - Dioulasso aerodrome.

ENR 4.4 NAME-CODE DESIGNATORS FOR SIGNIFICANT POINTS

WAYPOINTS LIST TO BE REMOVED FROM AIP

NAME	COORDINATES		STATUS
VOKLA	11°06'36.90"N	004°32'13.60"W	IAF
KEPIL	11°02'37.20"N	004°29'08.80"W	IAF/IF
POVAT	10°58'37.30"N	004°26'04.00"W	IAF
GAPOT	11°20'36.20"N	004°13'35.90"W	IAF
MOKIK	11°12'36.20"N	004°07'26.60"W	IAF

WAYPOINTS LIST TO BE INSERTED INTO AIP

NAME	COORDINATES		STATUS
BIRIL	11°02'00.69"N	004°29'57.31"W	IAF/IF
TETBA	11°06'48.40"N	004°33'39.10"W	IAF
POLAP	10°57'12.89"N	004°26'15.62"W	IAF
GARIG	10°57'53.62"N	004°23'22.68"W	IAF
NEDBU	11°10'11.33"N	004°32'08.40"W	IAF
SONUB	11°21'24.20"N	004°14'12.86"W	IAF
KOREP	11°11'48.22"N	004°06'49.66"W	IAF
RAMEG	11°21'45.00"N	004°20'30.01"W	IAF
ENURA	11°02'58.33"N	004°09'10.19"W	IAF

AD2.24 DFOO — AERODROMES CHARTS



NEW CHARTS INSERTION	CHARTS WITHDRAWAL
New edition of IFR flight procedures	These charts will be withdrawn to eAIP, and will be no more available.
- 02AD2-DFOO-STAR-RNP06 - 02AD2-DFOO-STAR-RNP06-DATA - 02AD2-DFOO-STAR-RNP24 - 02AD2-DFOO-STAR-RNP24-DATA - 02AD2-DFOO-STAR-VORDME06 - 02AD2-DFOO-STAR-VORDME24 - 02AD2-DFOO-IAC-RNP06 - 02AD2-DFOO-IAC-RNP06-DATA - 02AD2-DFOO-IAC-RNP24 - 02AD2-DFOO-IAC-RNP24-DATA - 02AD2-DFOO-IAC-ILSY06 - 02AD2-DFOO-IAC-ILSY-DATA - 02AD2-DFOO-IAC-ILSZ06 - 02AD2-DFOO-IAC-VOR06 - 02AD2-DFOO-IAC-VOR24	- 02AD2-DFOO-STAR-RNAV06 - 02AD2-DFOO-STAR-RNAV24 - 02AD2-DFOO-STAR-VORDME0624 - 02AD2-DFOO-IAC-RNAV06 - 02AD2-DFOO-IAC-RNAV24 - 02AD2-DFOO-IAC-ILSX06 - 02AD2-DFOO-IAC-ILSY06 - 02AD2-DFOO-IAC-ILSZ06 - 02AD2-DFOO-IAC-VORXY06 - 02AD2-DFOO-IAC-VORZY06 - 02AD2-DFOO-IAC-VORXY24

**INSTRUMENT
APPROACH CHART**
Categories A-B-C-D

AERODROME ELEV : 1512
THR RWY 06 ELEV : 1417
HEIGHTS RELATED TO THR RWY 06 ELEVATION

APP : BOBO TOWER 119.7
TWR : BOBO TOWER 119.7

BOBO-DIOULASSO - (DFOO)
RNP RWY 06

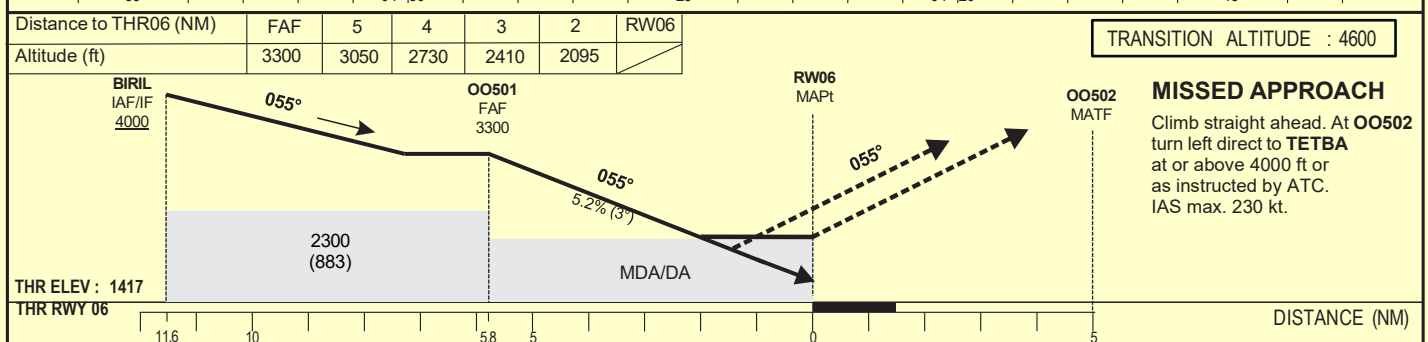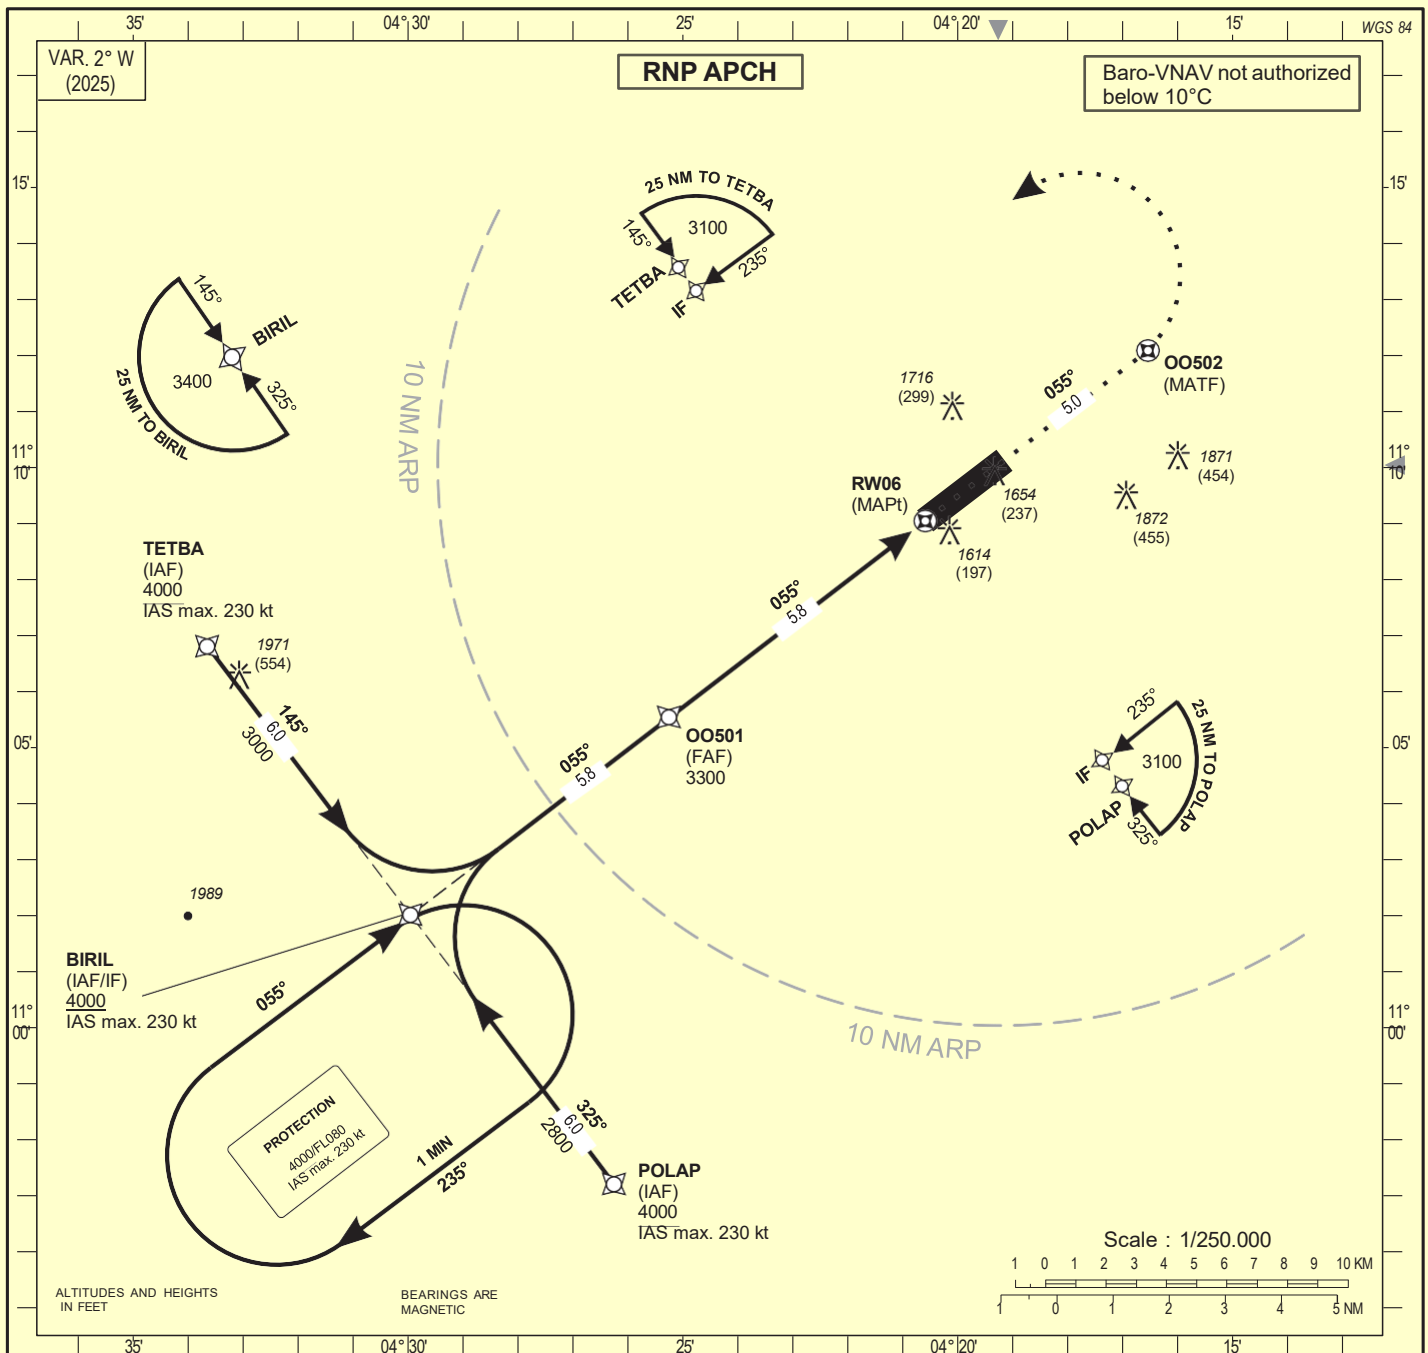

CAT	LNAV/VNAV				LNAV				Circling (3)				Timing FAF / THR 5.8 NM					
	OCA (OCH)	DA	DH	RVR(1)	RVR(2)	OCA (OCH)	MDA	MDH	RVR(1)	RVR(2)	OCA (OCH)	MDA					MDH	VIS
A	1713 (296)	1720 (300)		650	1200	1845 (428)	1850 (430)		900	1500	2011 (499)	2020 (500)		1500	KT MIN SEC KT MIN SEC 90 3 Min 52 140 2 Min 29 100 3 Min 29 150 2 Min 19 110 3 Min 10 160 2 Min 10 120 2 Min 54 170 2 Min 03 130 2 Min 41 180 1 Min 56			
B	1725 (308)	1730 (310)		800	1200	1845 (428)	1850 (430)		1000	1500	2167 (655)	2170 (660)		1600				
C	1744 (327)	1750 (330)		800	1200	1845 (428)	1850 (430)		1000	1800	2266 (754)	2270 (760)		2400				
D	1758 (341)	1760 (350)		800	1200	1845 (428)	1850 (430)		1400	2000	2266 (754)	2270 (760)		3600				
Notes : (1) With approach lights - (2) Without approach lights (3) Daytime only. OCH and MDH AAL RVR AND VIS IN METERS															TCH : 15 m			

TCH : 15 m

27 NOV 2025


AERONAUTICAL INFORMATION SERVICE - ASECNA

02AD2-DFOO-IAC-RNP06


AMDT 12/25 : NEW EDITION

TABULAR DESCRIPTION											
RNP RWY06											
Serial Number	Path Descriptor	Waypoint Identifier	Fly-Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (Kt)	VPA/TCH (°/m)	Navigation Specification
10	IF	TETBA	-	-	-	-	-	+4000	-230	-	RNP APCH
20	TF	BIRIL	-	145(142.7)	-	6.0	-	+4000	-230	-	RNP APCH
10	IF	POLAP	-		-	-	-	+4000	-230	-	RNP APCH
20	TF	BIRIL	-	325(322.7)	-	6.0		+4000	-230	-	RNP APCH
10	IF	BIRIL	-	-	-	-	-	+4000	-230	-	RNP APCH
20	TF	OO501	-	055(052.7)	-	5.8	-	@3300	-	-	RNP APCH
30	TF	RW06	Y	055(052.7)	+3	5.8	-	@1467	-	-3.0/15	RNP APCH
40	CF	OO502	Y	055(052.7)	-	5.0	-	-	-230	-	RNP APCH
50	DF	TETBA	-	-	-	-	L	+4000	-230	-	RNP APCH
10	IF	BIRIL	-	-	-	-	-	+4000	-230	-	RNP APCH
20	HM	BIRIL	-	055(052.7)	-	-	R	+4000	-230	-	RNP APCH

WAYPOINTS LIST		
RNP RWY 06		
Waypoint Identifier	Coordinates	
OO501	11°05'32.663"N	004°25'15.290"W
OO502	11°12'05.184"N	004°16'32.580"W
BIRIL	11°02'00.686"N	004°29'57.313"W
TETBA	11°06'48.398"N	004°33'39.095"W
POLAP	10°57'12.888"N	004°26'15.621"W
RW06	11°09'02.796"N	004°20'35.552"W

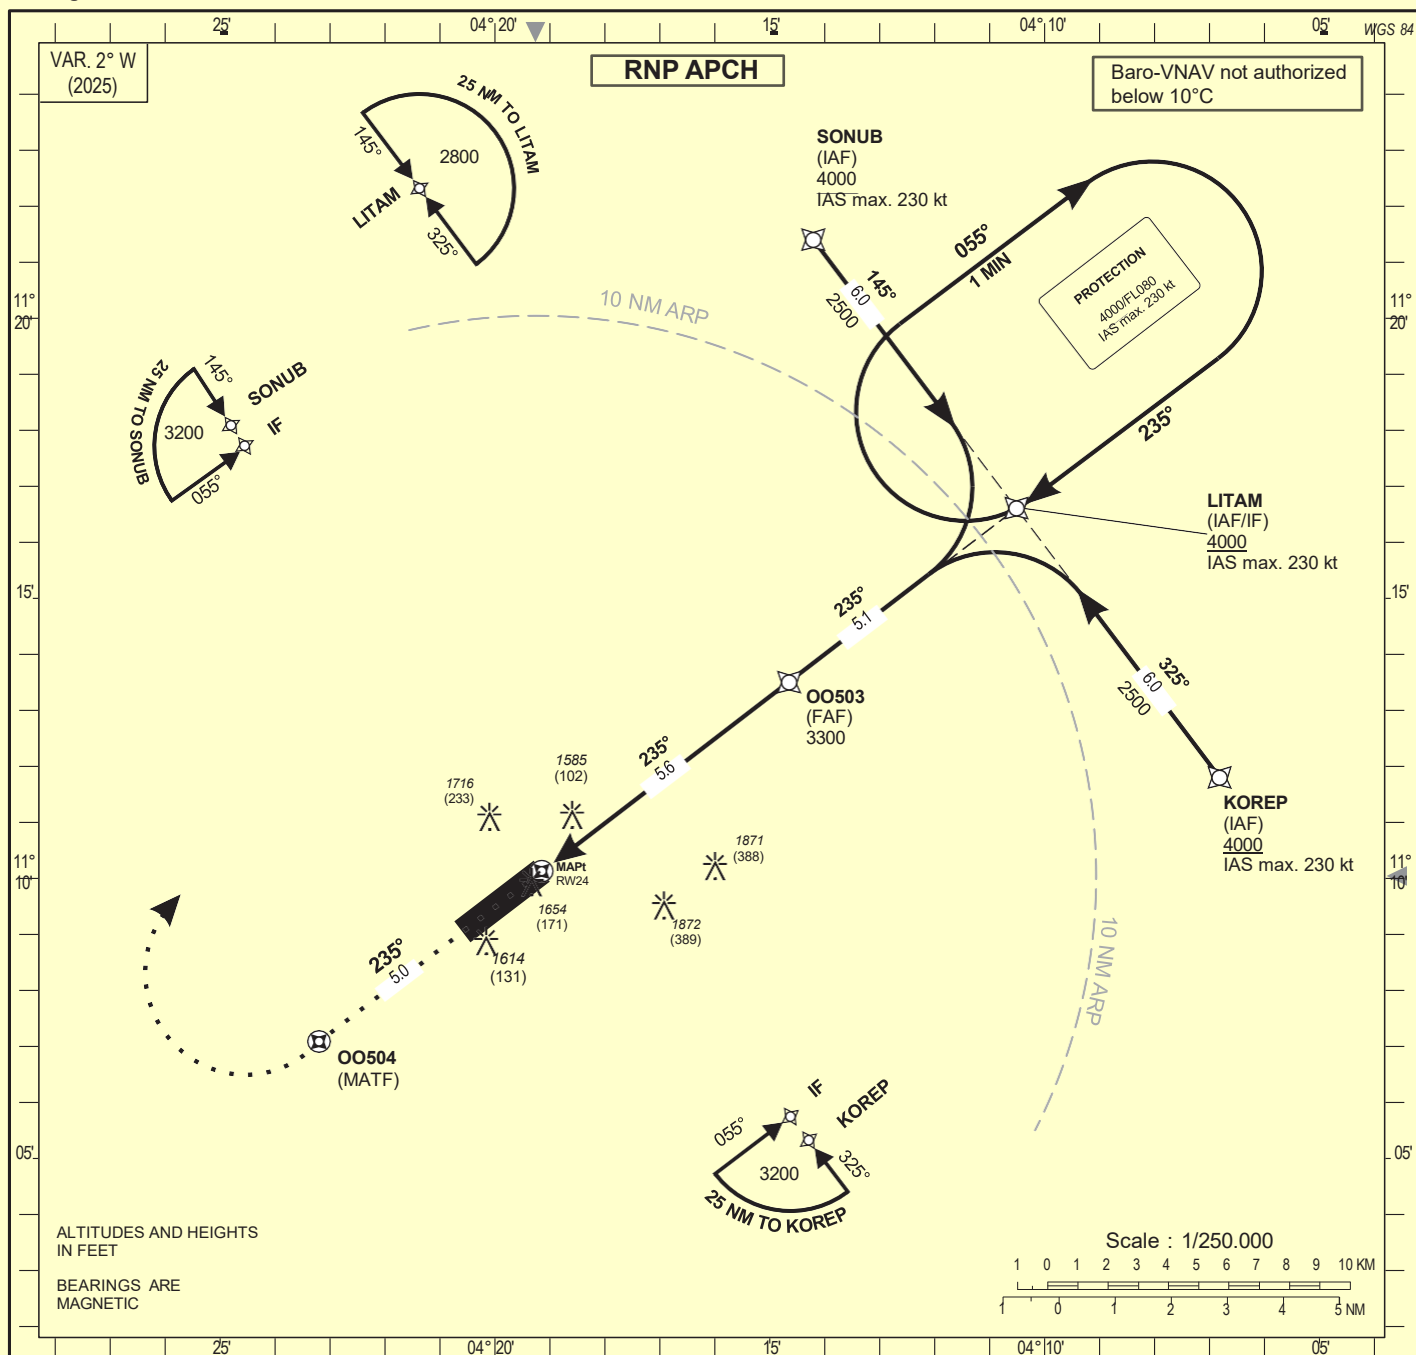

Distance to THR24 (NM)	RW24	2	3	4	5	FAF
Altitude (ft)		2155	2475	2795	3110	3300

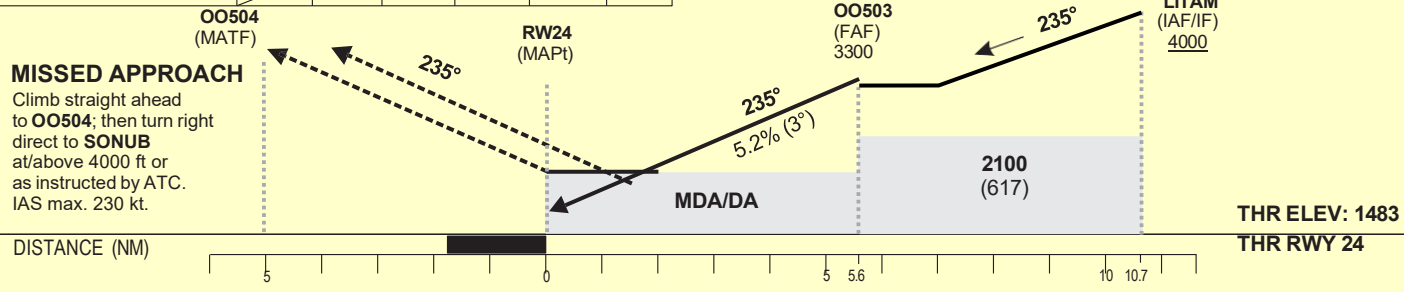

CAT	LNAV/VNAV				LNAV				Circling (1)				Timing
	OCA (OCH)	DA	DH	RVR	OCA (OCH)	MDA	MDH	RVR	OCA (OCH)	MDA	MDH	VIS	
A	1738 (255)	1740 (260)	1200	1889 (406)	1890 (410)	1500	2011 (499)	2020 (500)	1500				FAF / THR 5.6 NM
B	1751 (268)	1760 (270)	1200	1889 (406)	1890 (410)	1500	2167 (655)	2170 (660)	1600				KT MIN SEC KT MIN SEC
C	1770 (287)	1770 (290)	1200	1889 (406)	1890 (410)	1800	2266 (754)	2270 (760)	2400				90 3 Min 44 140 2 Min 24
D	1797 (314)	1800 (320)	1200	1889 (406)	1890 (410)	2000	2266 (754)	2270 (760)	3600				100 3 Min 22 150 2 Min 14
													110 3 Min 03 160 2 Min 06
													120 2 Min 48 170 1 Min 59
													130 2 Min 35 180 1 Min 52

Notes : (1) Daytime only. OCH and MDH AAL

RVR AND VIS IN METERS

TCH : 15 m

TABULAR DESCRIPTION

RNP RWY 24


Serial Number	Path Descriptor	Waypoint Identifier	Fly-Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (Kt)	VPA/TCH (°/m)	Navigation Specification
10	IF	SONUB	-	-	-	-	-	+4000	-230	-	RNP APCH
20	TF	LITAM	-	145(142.7)	-	6.0	-	+4000	-230	-	RNP APCH
10	IF	KOREP	-	-	-	-	-	+4000	-230	-	RNP APCH
20	TF	LITAM	-	325(322.7)	-	6.0	-	+4000	-230	-	RNP APCH
10	IF	LITAM	-	-	-	-	-	+4000	-230	-	RNP APCH
20	TF	OO503	-	235(232.7)	-	5.1	-	@3300	-	-	RNP APCH
30	TF	RW24	Y	235(232.7)	+3	5.6	-	@1533	-	-3.0/15	RNP APCH
40	CF	OO504	Y	235(232.7)	+3	5.0	-	-	-230	-	RNP APCH
50	DF	SONUB	-	-	-	-	R	+4000	-230	-	RNP APCH
10	IF	LITAM	-	-	-	-	-	+4000	-230	-	RNP APCH
20	HM	LITAM	-	235(232.7)	-	-	R	+4000	-230	-	RNP APCH

WAYPOINTS LIST

RNP RWY 24

Waypoint Identifier	Coordinates	
OO503	11°13'30.278"N	004°14'39.166"W
OO504	11°07'05.376"N	004°23'11.892"W
LITAM	11°16'36.219"N	004°10'31.188"W
SONUB	11°21'24.201"N	004°14'12.864"W
KOREP	11°11'48.222"N	004°06'49.659"W
RW24	11°10'07.799"N	004°19'08.975"W

BOBO-DIOULASSO - (DFOO)
ILS Y or LOC Y RWY 06
IDENT ILS « BO » FREQ. 109.7

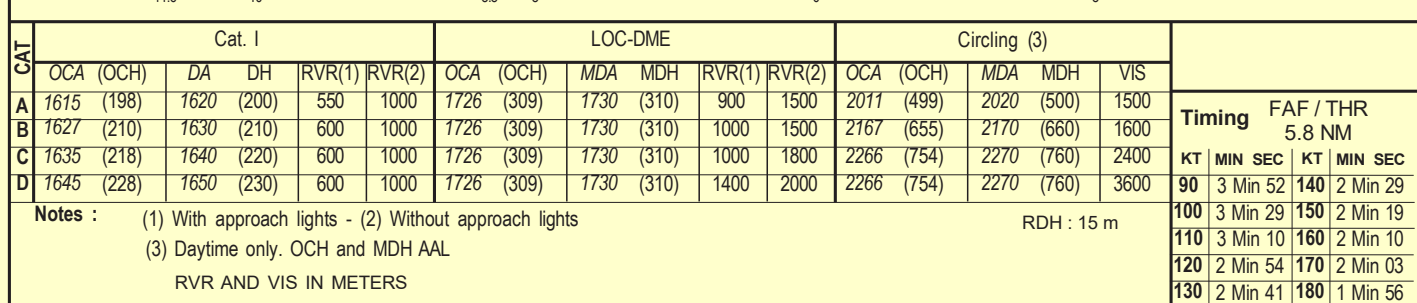



Page 7 / 17

TABULAR DESCRIPTION											
ILS Y or LOC Y RWY06											
Serial Number	Path Descriptor	Waypoint Identifier	Fly-Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (Kt)	VPA/RDH (°/m)	Navigation Specification
10	IF	TETBA	-	-	-	-	-	+4000	-230	-	RNP APCH
20	TF	BIRIL	-	145(142.7)	-	6.0	-	+4000	-230	-	RNP APCH
10	IF	POLAP	-		-	-	-	+4000	-230	-	RNP APCH
20	TF	BIRIL	-	325(322.7)	-	6.0		+4000	-230	-	RNP APCH
10	IF	BIRIL	-	-	-	-	-	+4000	-230	-	RNP APCH
20	TF	OO501	-	055(052.7)	-	5.8	-	@3300	-	-	N/A
30	TF	RW06	Y	055(052.7)	+3	5.8	-	@1467	-	-3.0/15	N/A
40	CF	OO502	Y	055(052.7)	-	5.0	-	-	-230	-	RNP APCH
50	DF	TETBA	-	-	-	-	L	+4000	-230	-	RNP APCH
10	IF	BIRIL	-	-	-	-	-	+4000	-230	-	RNP APCH
20	HM	BIRIL	-	055(052.7)	-	-	R	+4000	-230	-	RNP APCH

WAYPOINTS LIST		
ILS Y or LOC Y RWY 06		
Waypoint Identifier	Coordinates	
OO501	11°05'32.663"N	004°25'15.290"W
OO502	11°12'05.184"N	004°16'32.580"W
BIRIL	11°02'00.686"N	004°29'57.313"W
TETBA	11°06'48.398"N	004°33'39.095"W
POLAP	10°57'12.888"N	004°26'15.621"W
RW06	11°09'02.796"N	004°20'35.552"W

BOBO-DIOULASSO - (DFOO)
ILS Z or LOC Z RWY 06
 IDENT ILS « BO » FREQ. 109.7

HEIGHTS RELATED TO THR RWY 06 ELEVATION

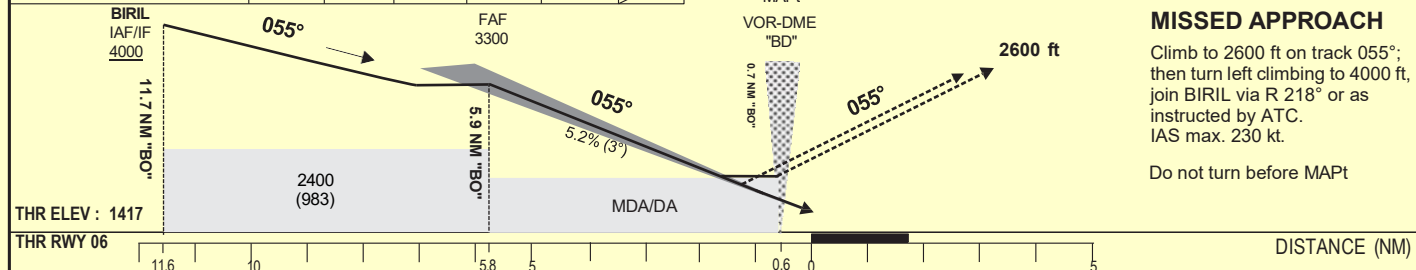

CAT	Cat. I				LOC-DME				Circling (3)			Timing FAF / THR 5.8 NM								
	OCA (OCH)	DA	DH	RVR(1)	RVR(2)	OCA (OCH)	MDA	MDH	RVR(1)	RVR(2)	OCA (OCH)							MDA	MDH	VIS
A	1615 (198)	1620	(200)	550	1000	1726 (309)	1730	(310)	900	1500	2011 (499)	2020	(500)	1500	KT MIN SEC KT MIN SEC					
B	1627 (210)	1630	(210)	600	1000	1726 (309)	1730	(310)	1000	1500	2167 (655)	2170	(660)	1600						
C	1635 (218)	1640	(220)	600	1000	1726 (309)	1730	(310)	1000	1800	2266 (754)	2270	(760)	2400						
D	1645 (228)	1650	(230)	600	1000	1726 (309)	1730	(310)	1400	2000	2266 (754)	2270	(760)	3600						
Notes : (1) With approach lights - (2) Without approach lights															RDH : 15 m					
(3) Daytime only. OCH and MDH AAL																				
RVR AND VIS IN METERS																				
															100		3 Min 29	150		2 Min 19
															110		3 Min 10	160		2 Min 10
															120		2 Min 54	170		2 Min 03
															130		2 Min 41	180		1 Min 56

27 NOV 2025

AERONAUTICAL INFORMATION SERVICE - ASECNA

02AD2-DF00-IAC-ILSZ06

**INSTRUMENT
APPROACH CHART**
Categories A-B-C-D


AERODROME ELEV : 1512
THR RWY 06 ELEV : 1417

APP : BOBO TOWER 119.7
TWR : BOBO TOWER 119.7

BOBO-DIOULASSO - (DFOO)
VOR RWY 06


HEIGHTS RELATED TO THR RWY 06 ELEVATION

IDENT VOR « BD » FREQ. 114.7

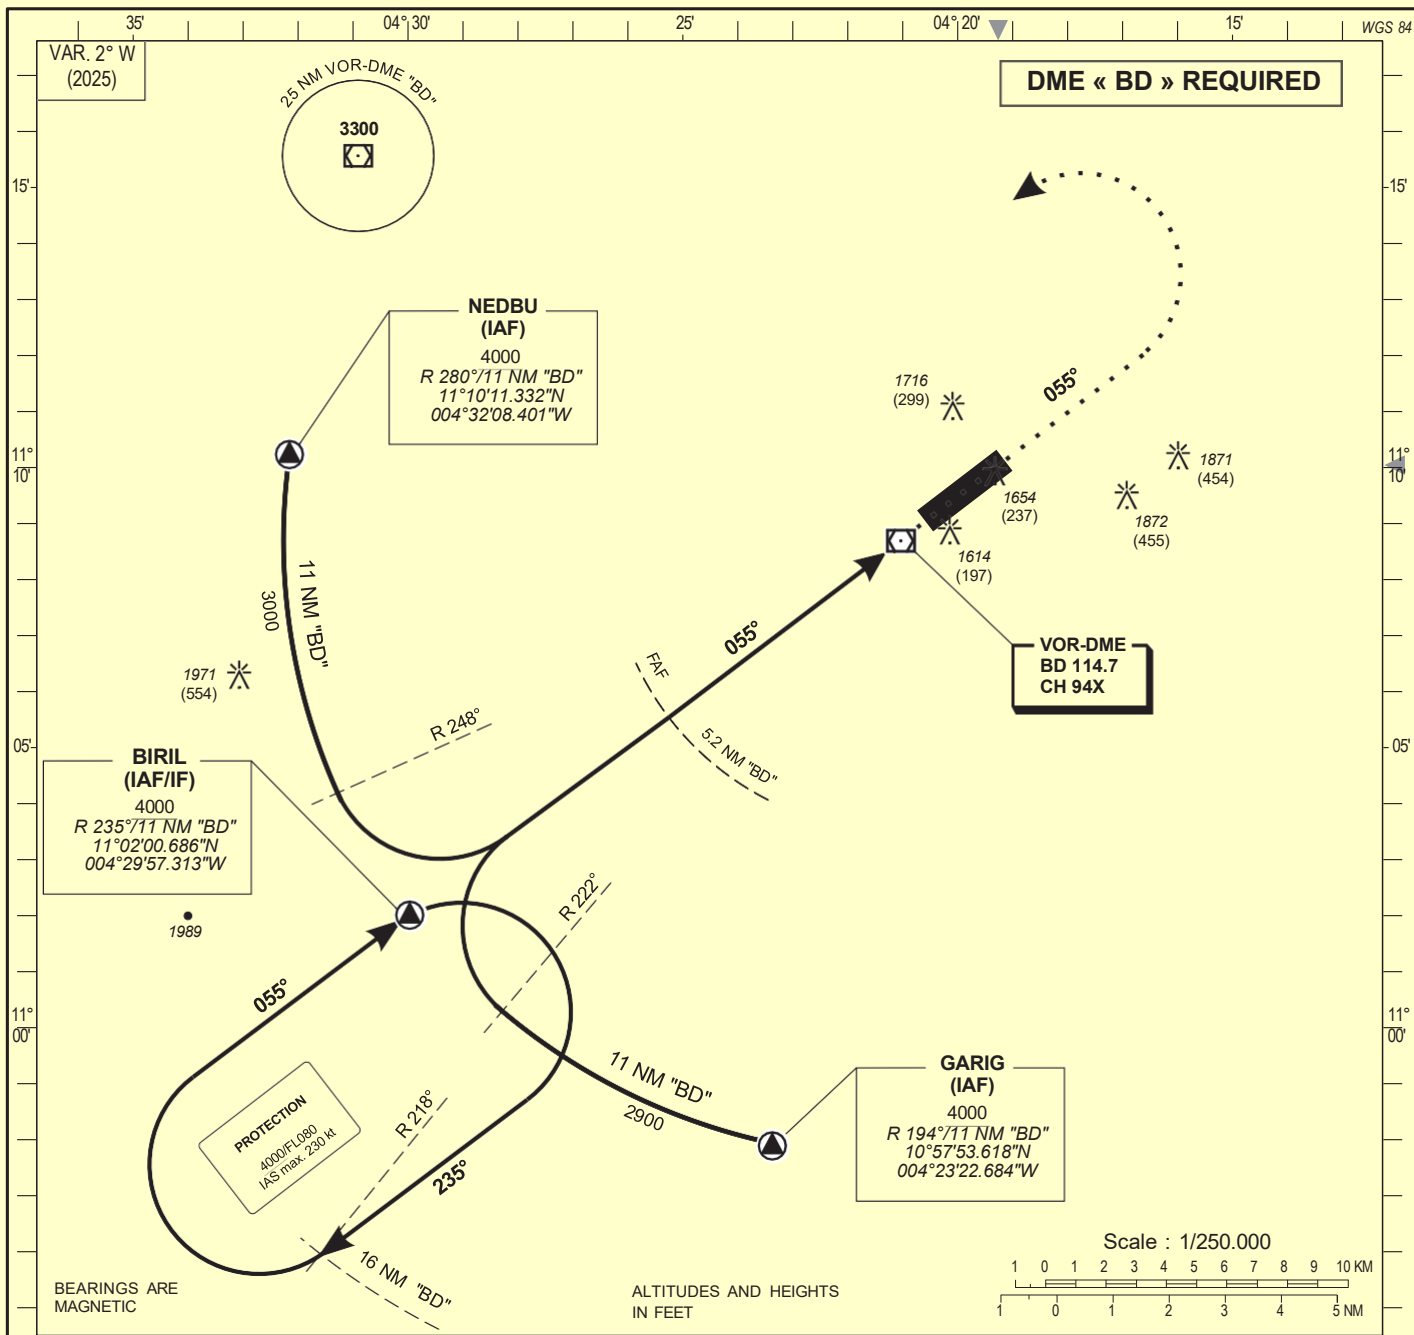

Distance to DME « BD » (NM)	FAF	5	4	3	2	RW06
Altitude (ft)	3300	3240	2925	2605	2285	

TRANSITION ALTITUDE : 4600

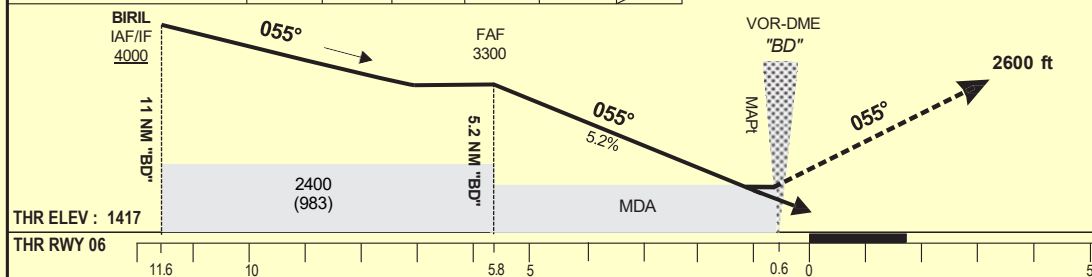

MISSED APPROACH

Climb to 2600 ft on R 055; then turn left climbing to 4000 ft, join BIRIL via R 218 or as instructed by ATC. IAS max. 230 kt.

Do not turn before MAPt

CAT	VOR-DME					Circling (3)				VIS	
	OCA (OCH)	MDA	MDH	RVR(1)	RVR(2)	OCA (OCH)	MDA	MDH			
A	1860 (443)	1860 (450)		1000	1500	2011 (499)	2020	(500)		1500	
B	1860 (443)	1860 (450)		1200	1500	2167 (655)	2170	(660)		1600	
C	1860 (443)	1860 (450)		1200	2000	2266 (754)	2270	(760)		2400	
D	1860 (443)	1860 (450)		1600	2000	2266 (754)	2270	(760)		3600	

Timing FAF / THR 5.8 NM					
KT	MIN	SEC	KT	MIN	SEC
90	3	Min 52	140	2	Min 29
100	3	Min 29	150	2	Min 19
110	3	Min 10	160	2	Min 10
120	2	Min 54	170	2	Min 03
130	2	Min 41	180	1	Min 56

Notes : (1) With approach lights - (2) Without approach lights
(3) Daytime only. OCH and MDH AAL

RVR AND VIS IN METERS

AMDT 12/25 : NEW EDITION

27 NOV 2025

AERONAUTICAL INFORMATION SERVICE - ASECNA

02AD2-DFOO-IAC-VOR06

**INSTRUMENT
APPROACH CHART**
Categories **A-B-C-D**


AERODROME ELEV : 1512
THR RWY 24 ELEV : 1483

APP : BOBO TOWER 119.7
TWR : BOBO TOWER 119.7


BOBO-DIOULASSO - (DFOO)
VOR RWY 24

HEIGHTS RELATED TO THR RWY 24 ELEVATION

IDENT VOR « BD » FREQ. 114.7

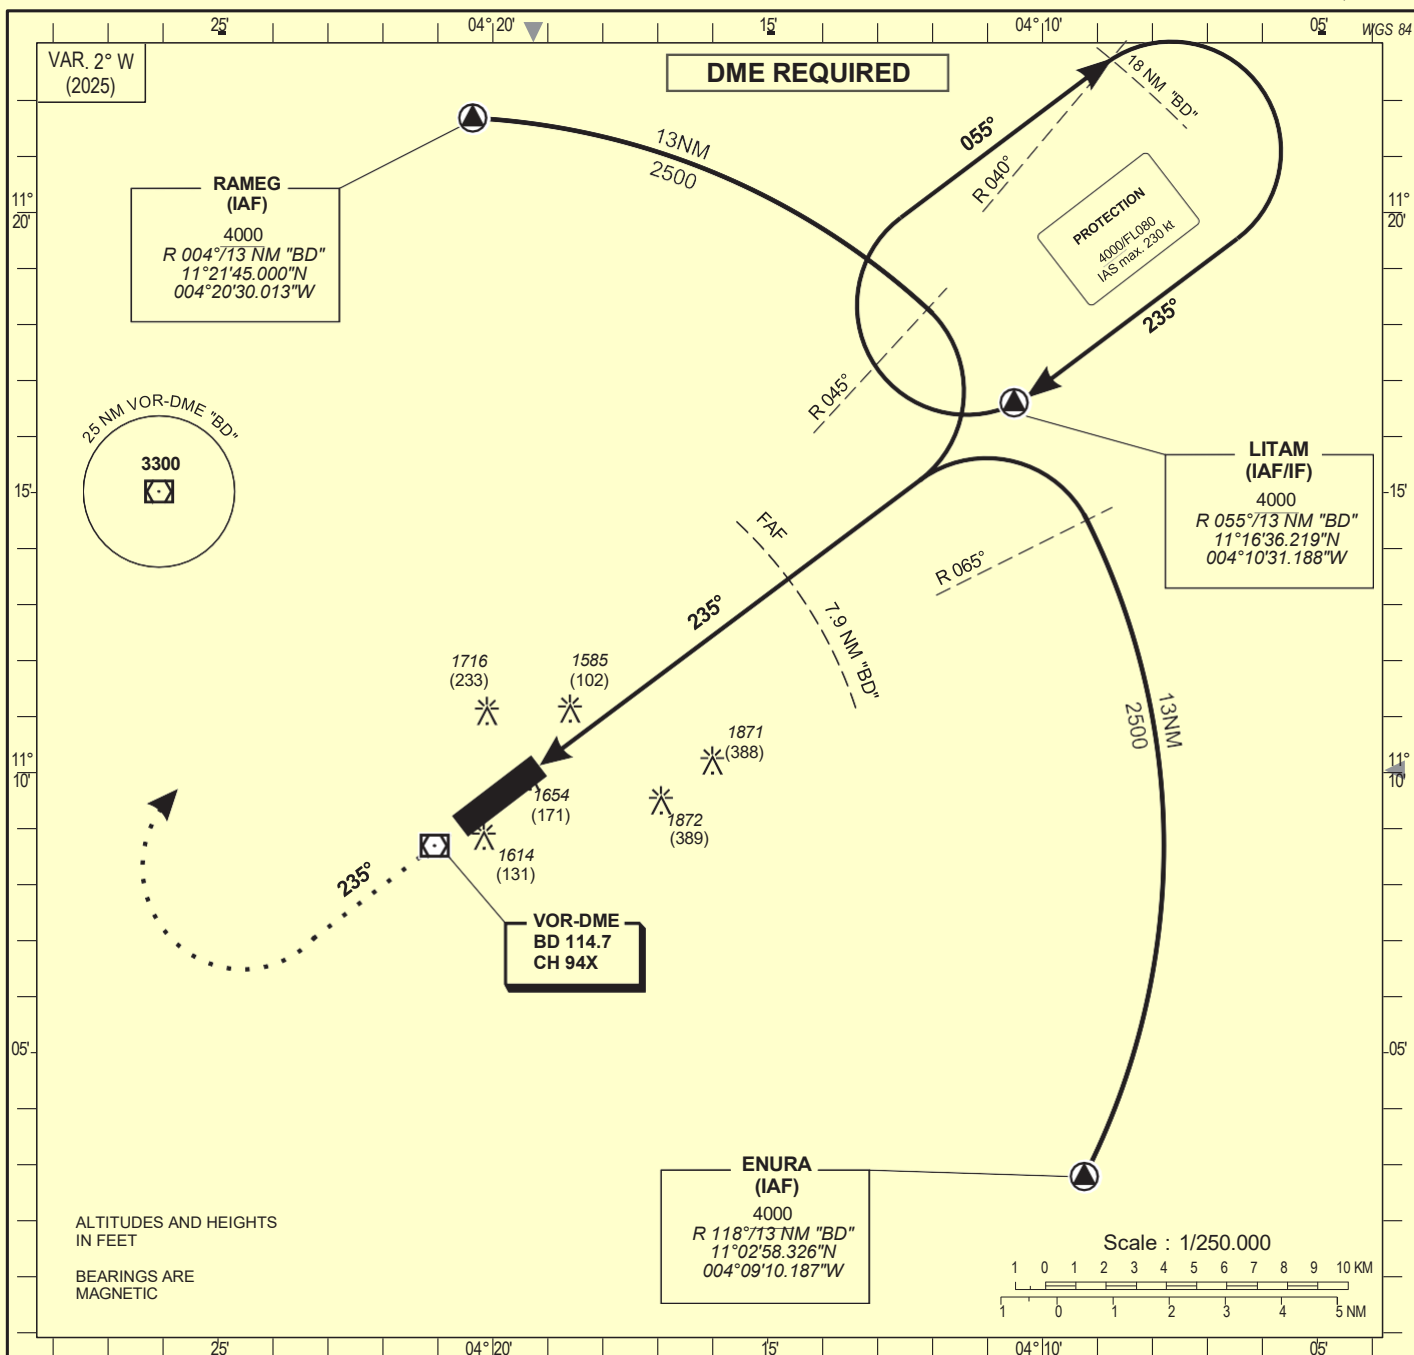

Distance to DME « BD » (NM)	RW24	4	5	6	7	FAF
Altitude (ft)		2060	2380	2695	3015	3300

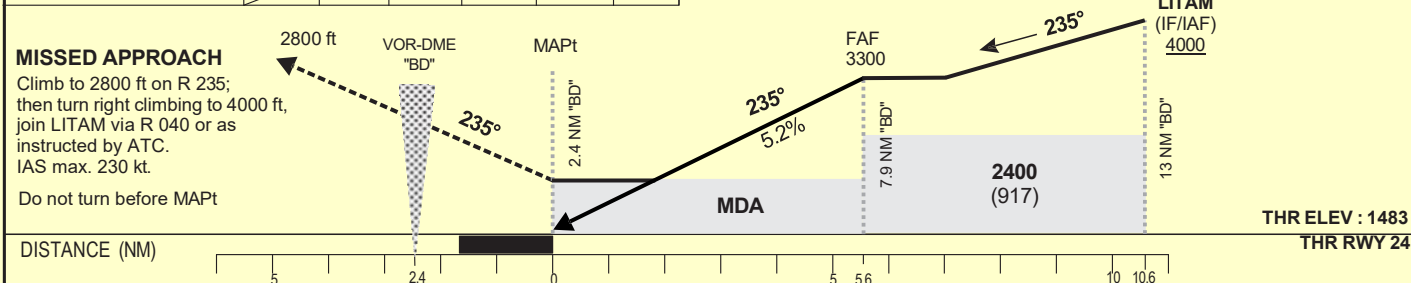

CAT	VOR-DME				Circling (1)								Timing FAF / THR 5.6 NM					
	OCA (OCH)	MDA	MDH	RVR	OCA (OCH)	MDA	MDH	VIS										
A	2055 (572)	2060 (580)		1500	2011 (499)	2020 (500)		1500										
B	2055 (572)	2060 (580)		1500	2167 (655)	2170 (660)		1600										
C	2055 (572)	2060 (580)		2000	2266 (754)	2270 (760)		2400										
D	2055 (572)	2060 (580)		2000	2266 (754)	2270 (760)		3600										
													KT	MIN	SEC	KT	MIN	SEC
													90	3	Min 44	140	2	Min 24

Notes : (1) Daytime only. OCH and MDH AAL

RVR AND VIS IN METERS

27 NOV 2025

AERONAUTICAL INFORMATION SERVICE - ASECNA


02AD2-DFOO-IAC-VOR24

AMDT 12/25 : NEW EDITION



STANDARD ARRIVAL CHART - INSTRUMENT (STAR RNP RWY 24)

BOBO-DIOULASSO - (DFOO)

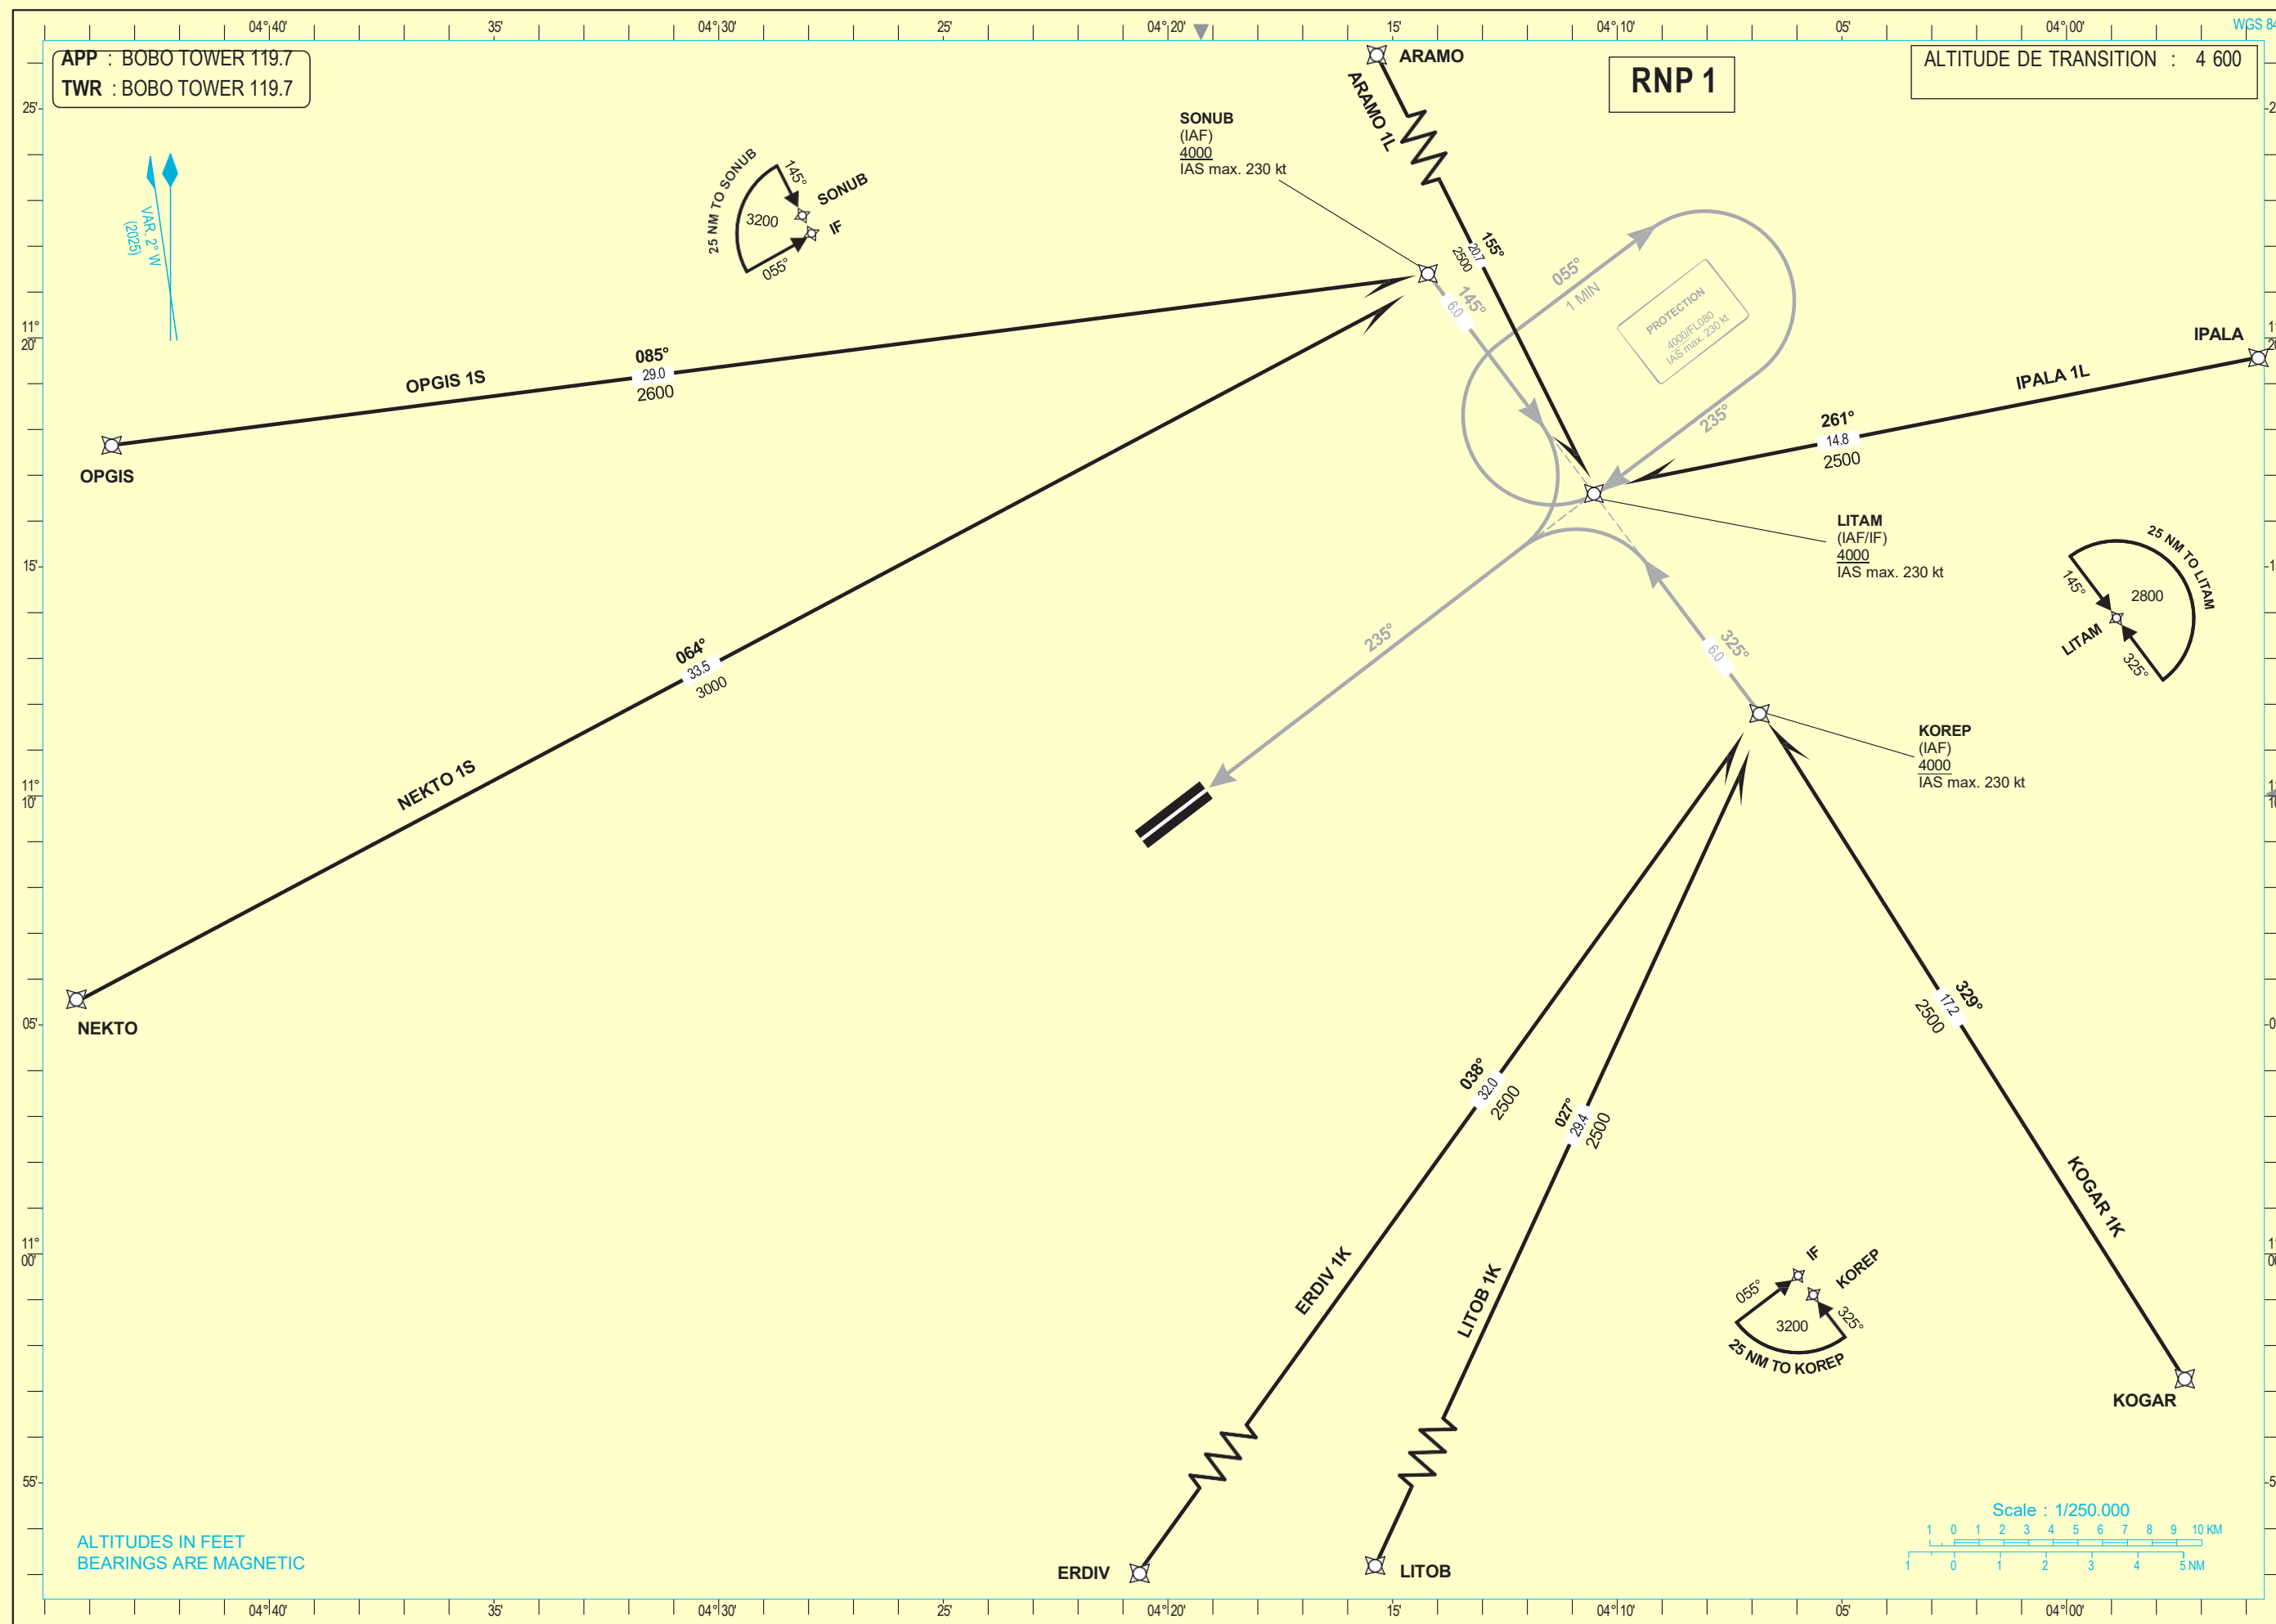




TABULAR DESCRIPTION											
STAR RNP RWY24											
Serial Number	Path Descriptor	Waypoint Identifier	Fly-Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (Kt)	VPA/TCH (°/m)	Navigation Specification
ARAMO 1L											
10	IF	ARAMO	-	-	-	-	-	-	-	-	RNP 1
20	TF	LITAM	-	155(153.4)	-	20.7	-	+4000	-230	-	RNP 1
OPGIS 1S											
10	IF	OPGIS	-		-	-	-	-	-	-	RNP 1
20	TF	SONUB	-	085(082.6)	-	29.0		+4000	-230	-	RNP 1
NEKTO 1S											
10	IF	NEKTO	-	-	-	-	-	-	-	-	RNP 1
20	TF	SONUB	-	064(061.9)	-	33.5	-	+4000	-230	-	RNP 1
ERDIV 1K											
10	IF	ERDIV	-	-	-	-	-	-	-	-	RNP 1
20	TF	KOREP	-	038(036.1)	-	32.0	-	+4000	-230	-	RNP 1
LITOB 1K											
10	IF	LITOB	-	-	-	-	-	-	-	-	RNP 1
20	TF	KOREP	-	027(024.6)	-	29.4	-	+4000	-230	-	RNP 1
KOGAR 1K											
10	IF	KOGAR	-	-	-	-	-	-	-	-	RNP 1
20	TF	KOREP	-	329(327.3)	-	17.2	-	+4000	-230	-	RNP 1
IPALA 1L											
10	IF	IPALA	-	-	-	-	-	-	-	-	RNP 1
20	TF	LITAM	-	261(258.6)	-	14.8	-	+4000	-230	-	RNP 1

WAYPOINTS LIST		
Waypoint Identifier	Coordinates	
ARAMO	11°35'09.000"N	004°19'56.000"W
OPGIS	11°17'39.400"N	004°43'30.400"W
NEKTO	11°05'33.800"N	004°44'17.200"W
ERDIV	10°45'49.300"N	004°25'58.400"W
LITOB	10°44'55.800"N	004°19'15.900"W
KOGAR	10°57'16.300"N	003°57'22.400"W
IPALA	11°19'34.100"N	003°55'43.400"W
SONUB	11°21'24.201"N	004°14'12.864"W
KOREP	11°11'48.222"N	004°06'49.659"W
LITAM	11°16'36.219"N	004°10'31.188"W



STANDARD ARRIVAL CHART - INSTRUMENT (STAR RNP RWY 06)


BOBO-DIOULASSO - (DFOO)

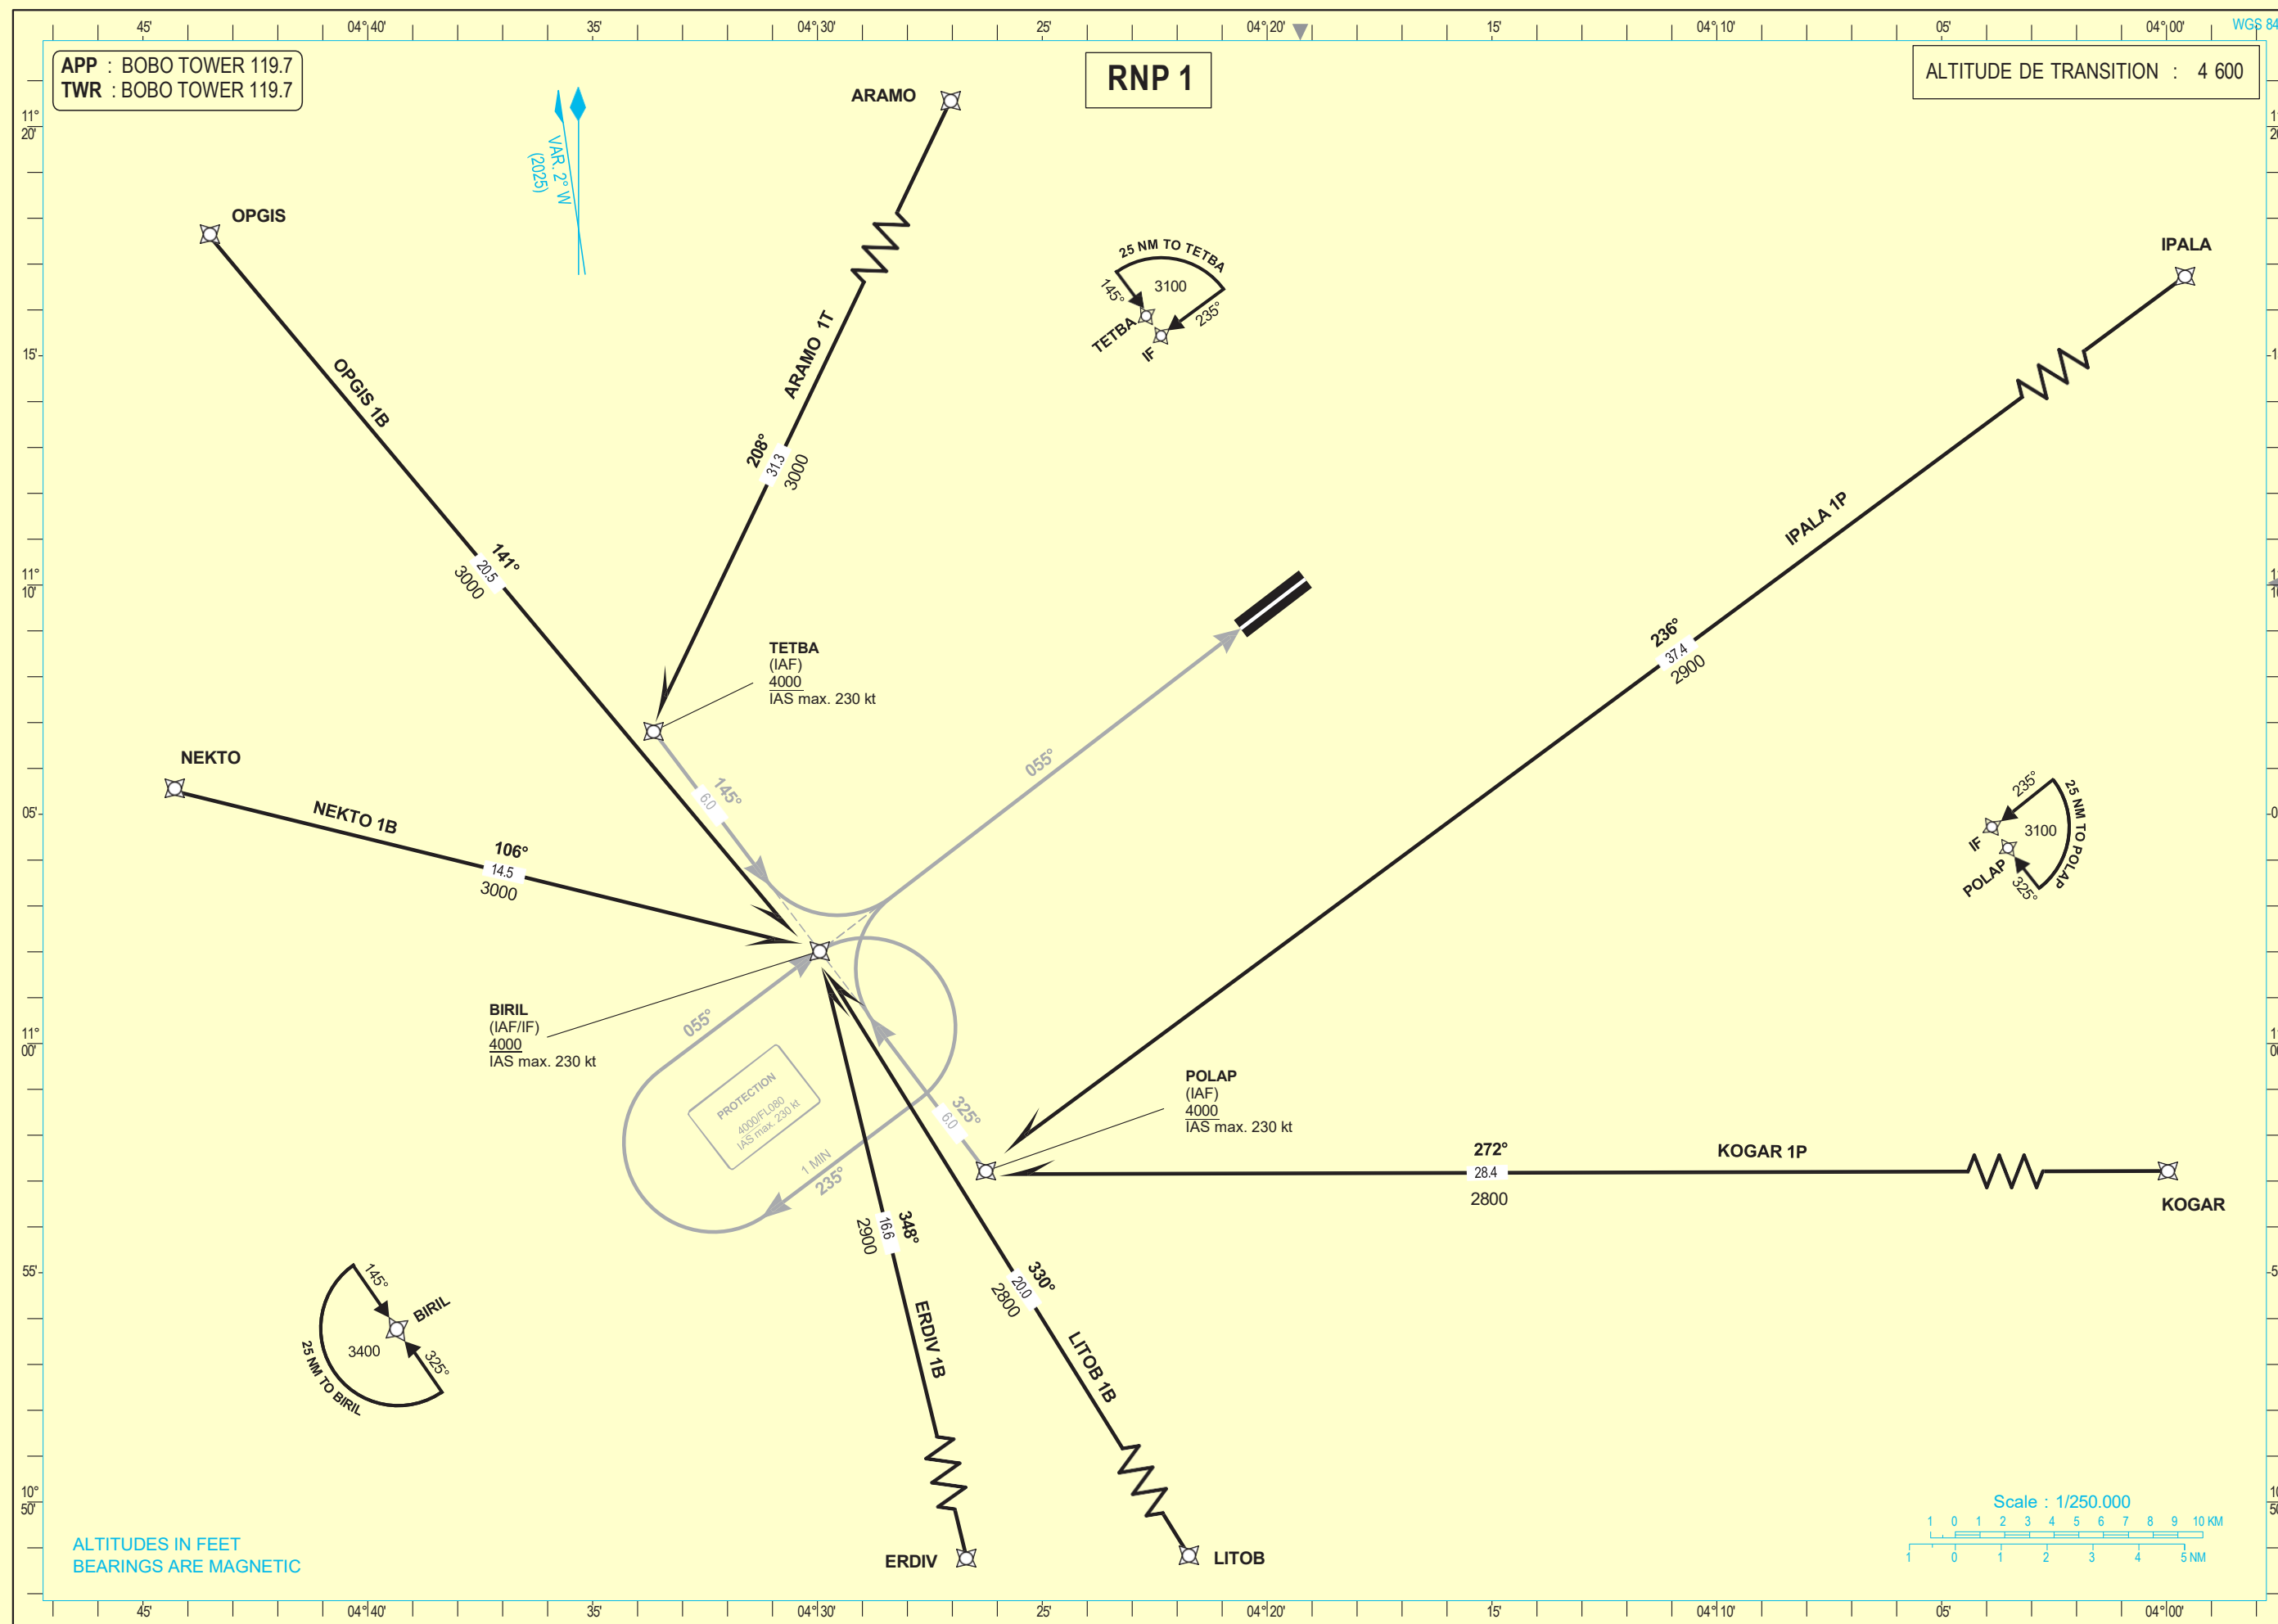



TABULAR DESCRIPTION											
STAR RNP RWY06											
Serial Number	Path Descriptor	Waypoint Identifier	Fly-Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (Kt)	VPA/TCH (°/m)	Navigation Specification
ARAMO 1T											
10	IF	ARAMO	-	-	-	-	-	-	-	-	RNP 1
20	TF	TETBA	-	208(205.5)	-	31.3	-	+4000	-230	-	RNP 1
OPGIS 1B											
10	IF	OPGIS	-		-	-	-	-	-	-	RNP 1
20	TF	BIRIL	-	141(139.4)	-	20.5		+4000	-230	-	RNP 1
NEKTO 1B											
10	IF	NEKTO	-	-	-	-	-	-	-	-	RNP 1
20	TF	BIRIL	-	106(104.1)	-	14.5	-	+4000	-230	-	RNP 1
ERDIV 1B											
10	IF	ERDIV	-	-	-	-	-	-	-	-	RNP 1
20	TF	BIRIL	-	348(346.3)	-	16.6	-	+4000	-230	-	RNP 1
LITOB 1B											
10	IF	LITOB	-	-	-	-	-	-	-	-	RNP 1
20	TF	BIRIL	-	330(328.3)	-	20.0	-	+4000	-230	-	RNP 1
KOGAR 1P											
10	IF	KOGAR	-	-	-	-	-	-	-	-	RNP 1
20	TF	POLAP	-	272(269.9)	-	28.4	-	+4000	-230	-	RNP 1
IPALA 1P											
10	IF	IPALA	-	-	-	-	-	-	-	-	RNP 1
20	TF	POLAP	-	236(233.5)	-	37.4	-	+4000	-230	-	RNP 1

WAYPOINTS LIST		
Waypoint Identifier	Coordinates	
ARAMO	11°35'09.000"N	004°19'56.000"W
OPGIS	11°17'39.400"N	004°43'30.400"W
NEKTO	11°05'33.800"N	004°44'17.200"W
ERDIV	10°45'49.300"N	004°25'58.400"W
LITOB	10°44'55.800"N	004°19'15.900"W
KOGAR	10°57'16.300"N	003°57'22.400"W
IPALA	11°19'34.100"N	003°55'43.400"W
BIRIL	11°02'00.686"N	004°29'57.313"W
TETBA	11°06'48.398"N	004°33'39.095"W
POLAP	10°57'12.888"N	004°26'15.621"W

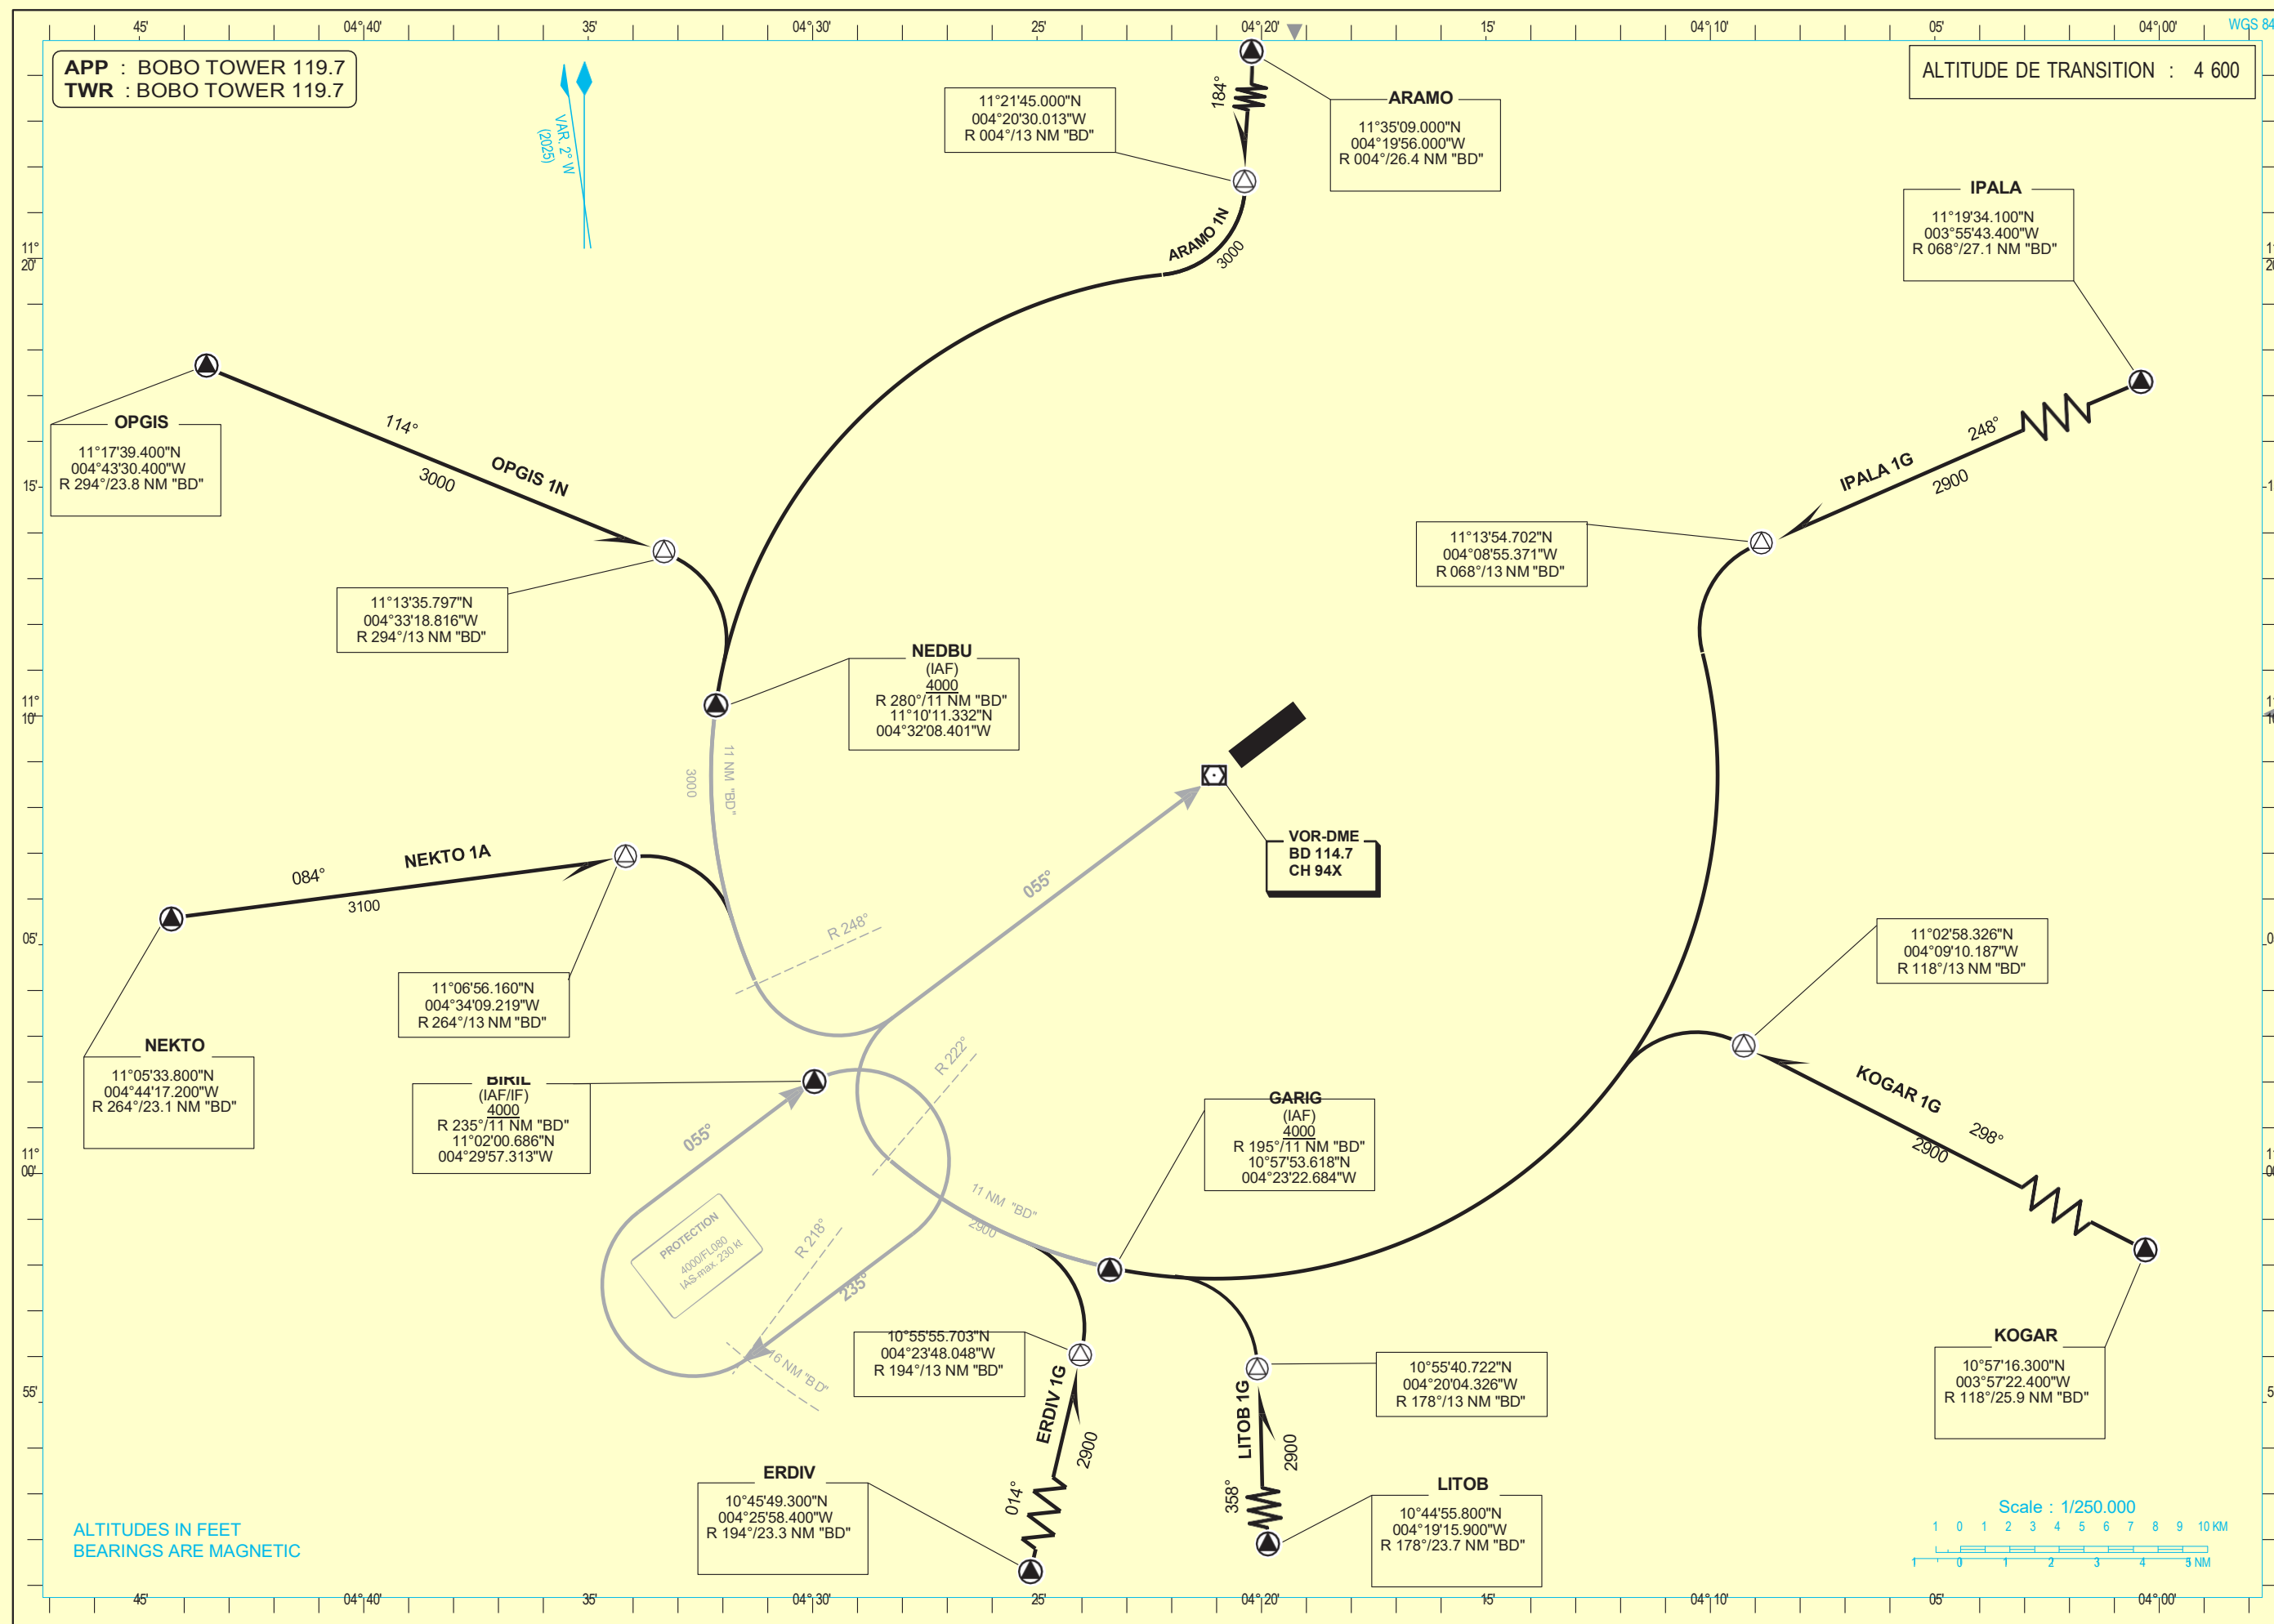



STANDARD ARRIVAL CHART - INSTRUMENT (STAR VOR-DME)

BOBO-DIOULASSO - (DFOO) RWY24

