

Phone : +(221) 76.026.88.15
 +(221) 33.957.49.37
Fax : +(221) 33.820.06.00
AFTN : GOOYNYX
E-mail : aim-gooo@asecna.org
Web : <https://aim.asecna.aero>



AIRAC AIP SUP
NR 91/A/26GO
JULY 09th, 2026

BUREAU NOTAM INTERNATIONAL DE L'OUEST AFRICAIN

B.P. 8155 Aeroport International Blaise DIAGNE Dakar/Diass-SENEGAL

BENIN – BURKINA FASO – COTE D'IVOIRE – GUINEE BISSAU – MALI – MAURITANIE – NIGER – SENEGAL – TOGO

NOUVELLES PROCEDURES DE VOL AUX INSTRUMENTS DE BAMAKO
NEW INSTRUMENT FLIGHT PROCEDURES OF BAMAKO

/
GABS

DATE D'ENTREE EN VIGUEUR / EFFECTIVE DATE	03 Septembre 2026 / September 03 rd , 2026
VALIDITE / VALIDITY	PERM

Ce supplément remplace et annule les pages suivantes :
This supplement replaces and cancels the following pages:


1. 10AD2-GABS-IAC-ILSY06
2. 10AD2-GABS-IAC-ILSZ06
3. 10AD2-GABS-IAC-RNAV06
4. 10AD2-GABS-IAC-RNAV24
5. 10AD2-GABS-IAC-VORY06
6. 10AD2-GABS-IAC-VORZ06
7. 10AD2-GABS-IAC-VORY24
8. 10AD2-GABS-IAC-VORZ24
9. 10AD2-GABS-STAR-RNAV0624
10. 10AD2-GABS-STAR-VORDME0624

**INSTRUMENT
APPROACH CHART**
Categories A-B-C-DAERODROME ELEV: 1247
THR RWY 06 ELEV: 1188**Bamako-Senou / President MODIBO KEITA (GABS)**

HEIGHTS RELATED TO THR RWY 06 ELEV


TWR / APP : 118.3

ILS Y or LOC Y RWY 06

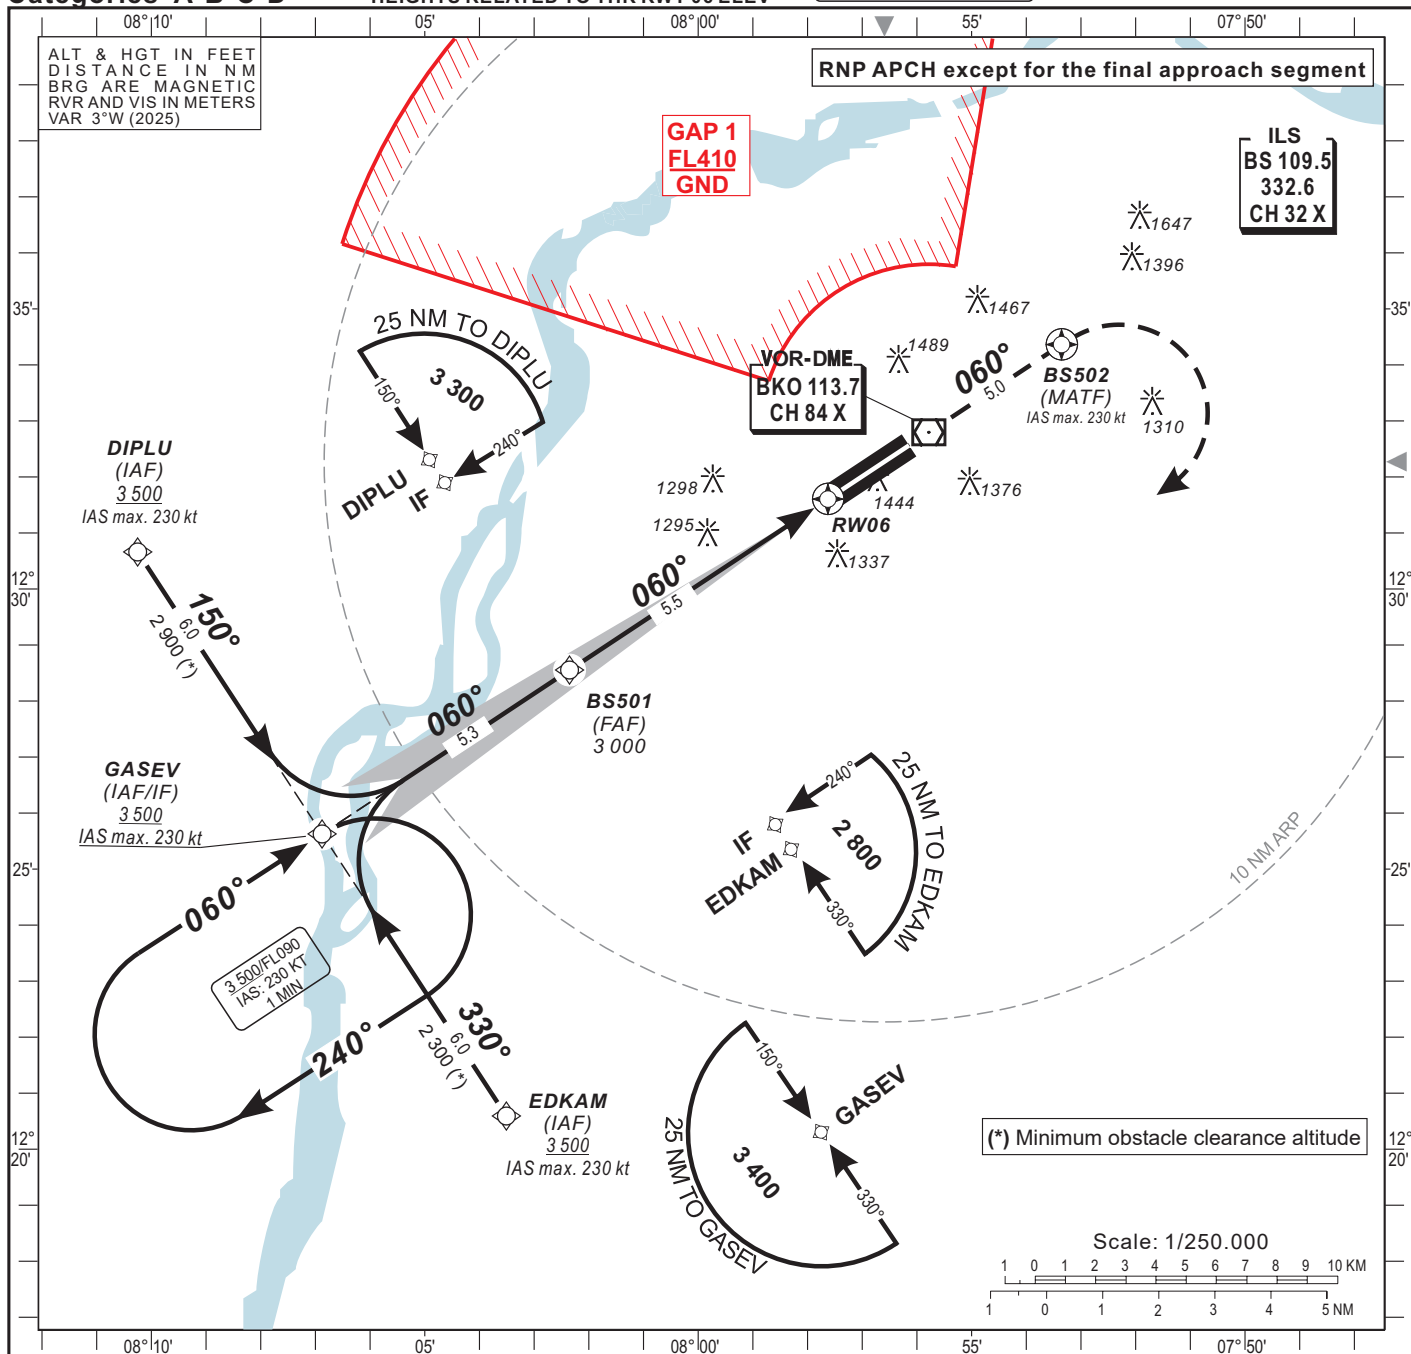

TRANSITION ALTITUDE: 4 500

FAF	5	4	3	2	DISTANCE TO DME "BS" (NM)
3 000	2 770	2 450	2 130	1 810	ALTITUDE (FT)

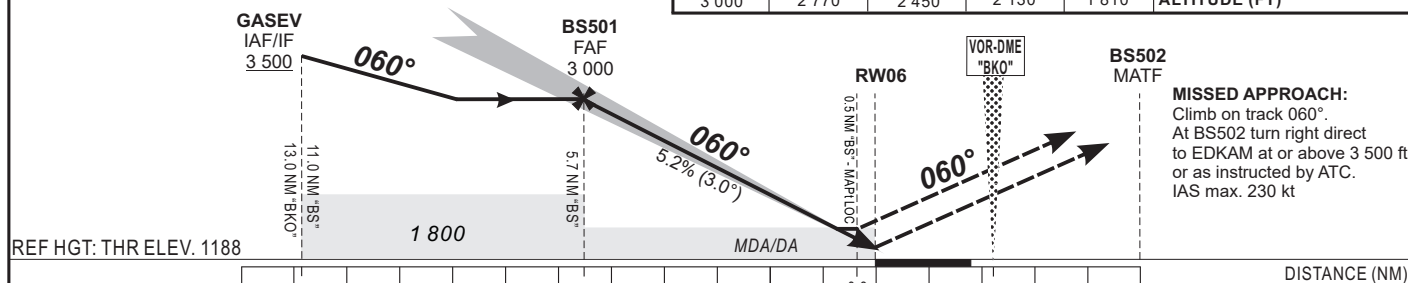

CAT	CAT. I				LOC-DME				CIRCLING				Timing	FAF / THR 5.5 NM
	OCA (OCH)	DA	DH	RVR1	RVR2	OCA (OCH)	MDA	MDH	RVR1	RVR2	OCA (OCH)	MDA	MDH	VIS
A	1419 (231)	1420 (240)	550	550	1200	1615 (427)	1620 (430)	1300	2000	1785 (538)	1790 (540)	2400	90	3 Min 40
B	1431 (243)	1440 (250)	550	550	1300	1615 (427)	1620 (430)	1300	2000	1795 (548)	1800 (550)	2400	100	3 Min 18
C	1439 (251)	1440 (260)	600	600	1300	1615 (427)	1620 (430)	1300	2000	1897 (650)	1900 (650)	2400	110	3 Min 00
D	1450 (262)	1450 (270)	600	600	1300	1615 (427)	1620 (430)	1300	2000	1947 (700)	1950 (700)	3600	120	2 Min 45
													130	2 Min 32

Notes:

- 1 With approach lights
- 2 Without approach lights
- 3 Daytime only. OCH and MDH AAL

- RDH: 15 m


**INSTRUMENT
APPROACH CHART**
Categories A-B-C-D

 AERODROME ELEV: 1247
 THR RWY 06 ELEV: 1188
 HEIGHTS RELATED TO THR RWY 06 ELEV

Bamako-Senou / President MODIBO KEITA (GABS)

TWR / APP : 118.3

ILS Y or LOC Y RWY 06
TABULAR DESCRIPTION

ILS Y RWY 06

Serial Number	Path Descriptor	Waypoint Identifier	Fly-Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (Kt)	VPA/ TCH (°/m)	Navigation Specification
010	IF	EDKAM	—	—	—	—	—	+3500	-230	—	RNP APCH
020	TF	GASEV	—	330(326.7)	—	6.0	—	+3500	-230	—	RNP APCH
010	IF	DIPLU	—	—	—	—	—	+3500	-230	—	RNP APCH
020	TF	GASEV	—	150(146.7)	—	6.0	—	+3500	-230	—	RNP APCH
010	IF	GASEV	—	—	—	—	—	+3500	-230	—	RNP APCH
020	TF	BS501	—	060(056.7)	—	5.3	—	3000	—	—	N/A
030	TF	RW06	Y	060(056.7)	—	5.5	—	@1238	—	3.0/15	N/A
040	CF	BS502	Y	060(056.7)	—	5.0	—	—	-230	—	RNP APCH
050	DF	EDKAM	—	—	—	—	R	+3500	-230	—	RNP APCH
010	IF	GASEV	—	—	—	—	—	+3500	-230	—	RNP APCH
020	HM	GASEV	—	060(056.7)	—	—	R	+3500	-230	—	RNP APCH

WAYPOINT LIST
ILS Y or LOC Y RWY 06
Waypoint Identifier
Coordinates

DIPLU	12°30'39.603"N	008°10'15.005"W
GASEV	12°25'37.574"N	008°06'52.659"W
EDKAM	12°20'35.501"N	008°03'30.443"W
BS501	12°28'33.152"N	008°02'21.140"W
BS502	12°34'22.057"N	007°53'20.929"W
RW06	12°31'36.563"N	007°57'37.273"W



INSTRUMENT APPROACH CHART Categories A-B-C-D


AERODROME ELEV: 1247
THR RWY 06 ELEV: 1188

Bamako-Senou / President MODIBO KEITA (GABS)

HEIGHTS RELATED TO THR RWY 06 ELEV


TWR / APP : 118.3

ILS Z or LOC Z RWY 06

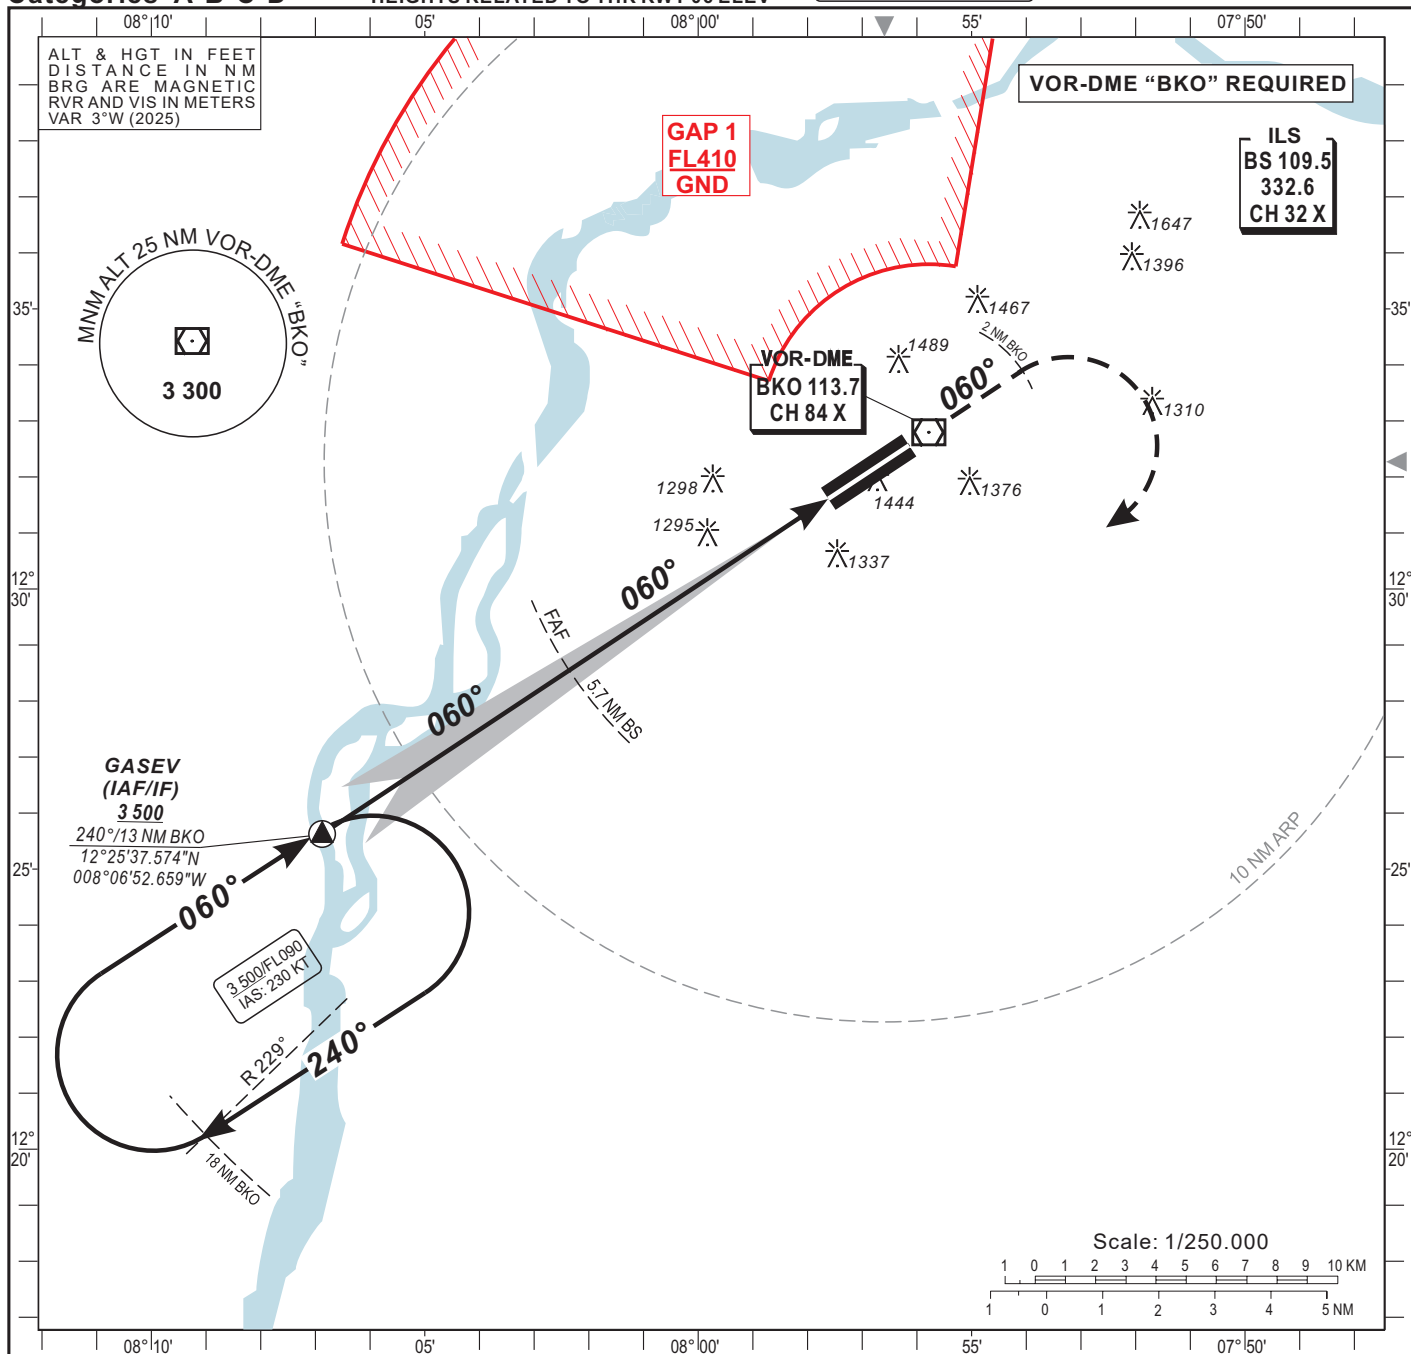

TRANSITION ALTITUDE: 4 500

FAF	5	4	3	2	DISTANCE TO DME "BS" (NM)
3 000	2 770	2 450	2 130	1 810	ALTITUDE (FT)

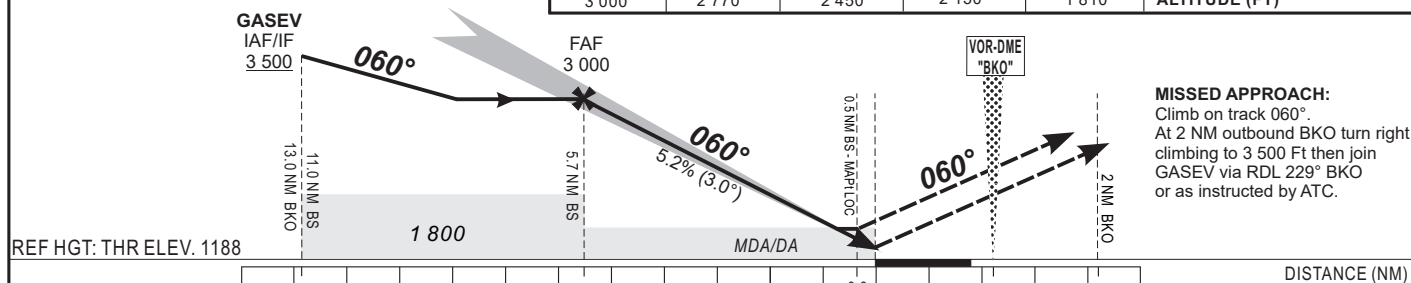

MISSED APPROACH:
Climb on track 060°.
At 2 NM outbound BKO turn right
climbing to 3 500 Ft then join
GASEV via RDL 229° BKO
or as instructed by ATC.

CAT	CAT. I				LOC-DME				CIRCLING 				Timing	FAF / THR 5.5 NM	
	OCA (OCH)	DA	DH	RVR1	RVR2	OCA (OCH)	MDA	MDH	RVR1	RVR2	OCA (OCH)	MDA			MDH
A	1419 (231)	1420 (240)	550	1200	1615 (427)	1620 (430)	1300	2000	1785 (538)	1790 (540)	2400	KT MIN SEC	KT MIN SEC		
B	1431 (243)	1440 (250)	550	1300	1615 (427)	1620 (430)	1300	2000	1795 (548)	1800 (550)	2400				
C	1439 (251)	1440 (260)	600	1300	1615 (427)	1620 (430)	1300	2000	1897 (650)	1900 (650)	2400				
D	1450 (262)	1450 (270)	600	1300	1615 (427)	1620 (430)	1300	2000	1947 (700)	1950 (700)	3600				
												90	3 Min 40	140	2 Min 21


Notes:
1 With approach lights
2 Without approach lights
3 Daytime only. OCH and MDH AAL

- RDH: 15 m

**INSTRUMENT
APPROACH CHART**
Categories A-B-C-DAERODROME ELEV: 1247
THR RWY 06 ELEV: 1188**Bamako-Senou / President MODIBO KEITA (GABS)**


TWR / APP : 118.3

HEIGHTS RELATED TO THR RWY 06 ELEV

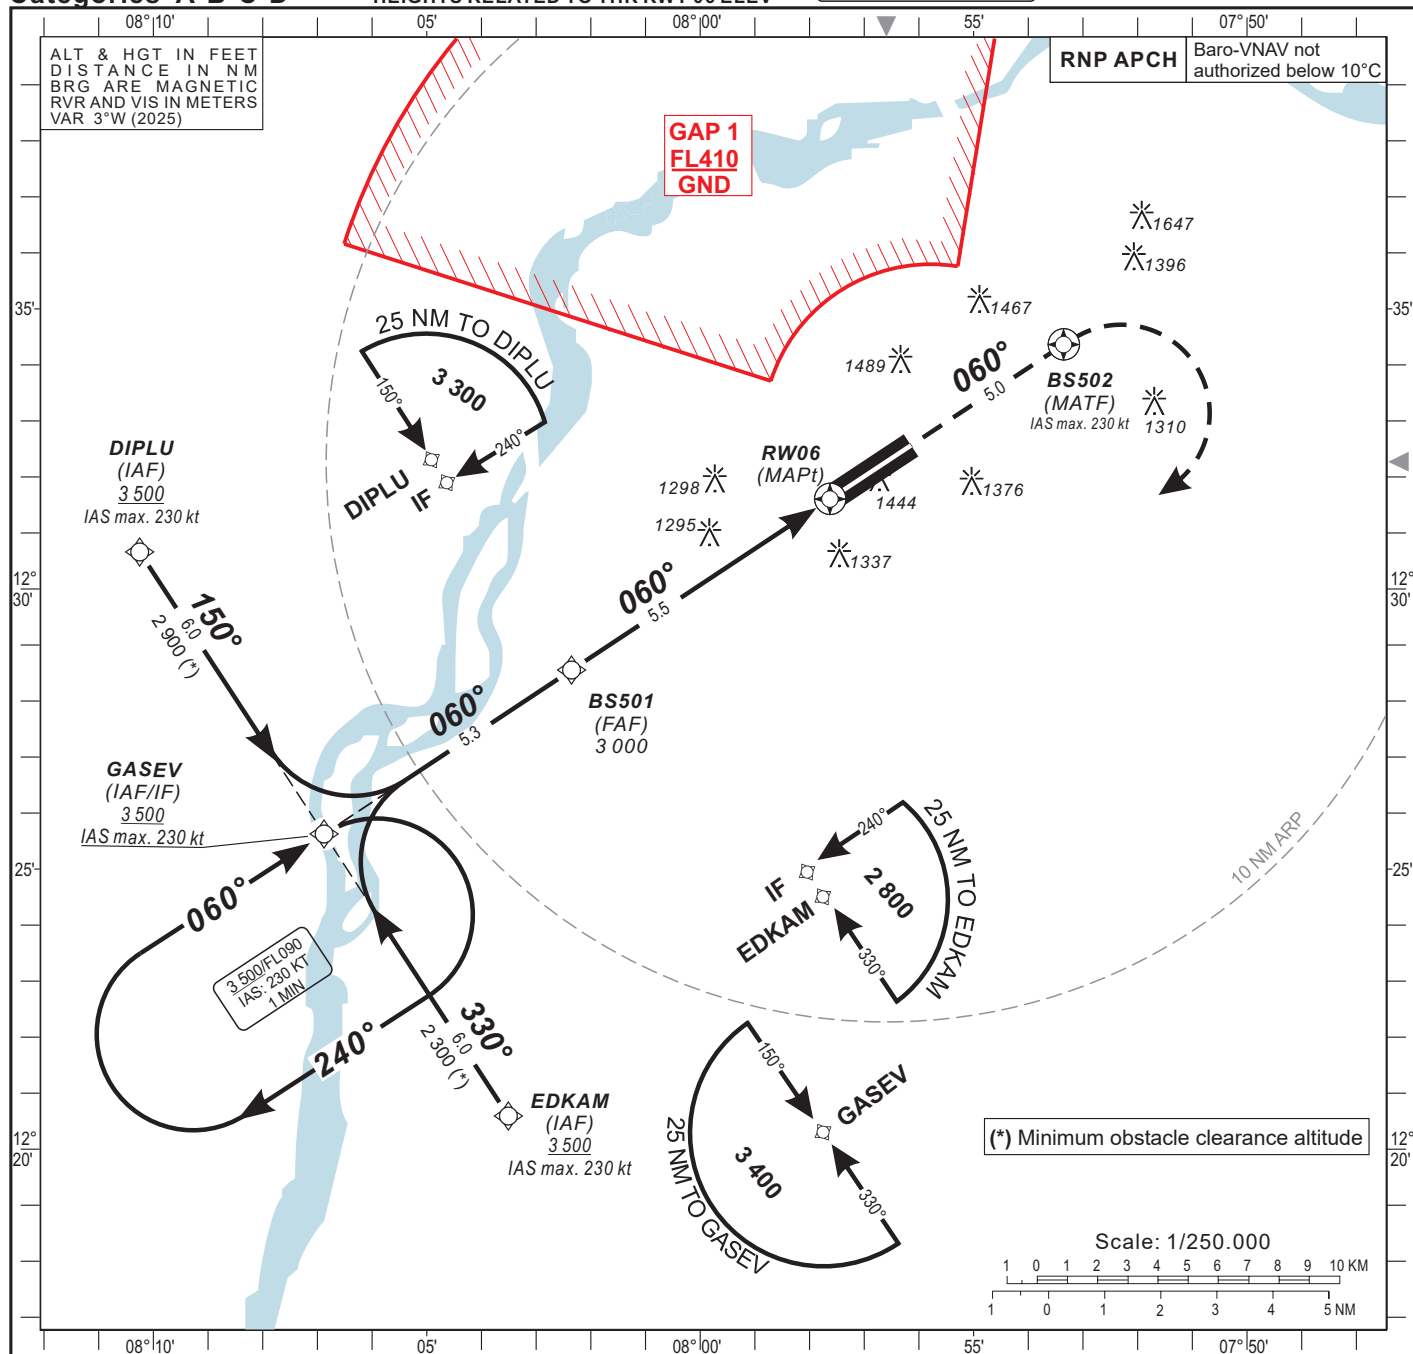RNP RWY 06

TRANSITION ALTITUDE: 4 500

FAF	5	4	3	2	DISTANCE TO RW06 (NM)
3 000	2 830	2 510	2 200	1 880	ALTITUDE (FT)

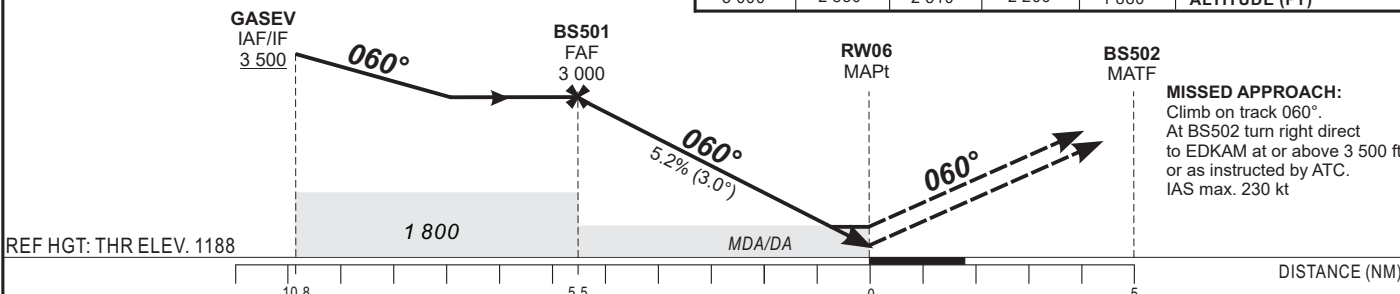

CAT	LNAV/VNAV					LNAV					CIRCLING				Timing	FAF / THR 5.5 NM
	OCA (OCH)	DA	DH	RVR1	RVR2	OCA (OCH)	MDA	MDH	RVR1	RVR2	OCA (OCH)	MDA	MDH	VIS		
A	1457 (269)	1460 (270)	600	1300	1615 (427)	1620 (430)	1300	2000	1785 (538)	1790 (540)	2400				90	3 Min 40
B	1469 (281)	1470 (290)	650	1400	1615 (427)	1620 (430)	1300	2000	1795 (548)	1800 (550)	2400				100	3 Min 18
C	1489 (301)	1490 (310)	700	1400	1615 (427)	1620 (430)	1300	2000	1897 (650)	1900 (650)	2400				110	3 Min 00
D	1516 (328)	1520 (330)	800	1500	1615 (427)	1620 (430)	1300	2000	1947 (700)	1950 (700)	3600				120	2 Min 45
															130	2 Min 32

Notes:

- 1 With approach lights
- 2 Without approach lights
- 3 Daytime only. OCH and MDH AAL

- RDH: 15 m


**INSTRUMENT
APPROACH CHART**
Categories A-B-C-D

 AERODROME ELEV: 1247
 THR RWY 06 ELEV: 1188
 HEIGHTS RELATED TO THR RWY 06 ELEV

Bamako-Senou / President MODIBO KEITA (GABS)

TWR / APP : 118.3

RNP RWY 06
TABULAR DESCRIPTION

RNP RWY 06

Serial Number	Path Descriptor	Waypoint Identifier	Fly-Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (Kt)	VPA/TCH (°/m)	Navigation Specification
010	IF	EDKAM	—	—	—	—	—	+3500	-230	—	RNP APCH
020	TF	GASEV	—	330(326.7)	—	6.0	—	+3500	-230	—	RNP APCH
010	IF	DIPLU	—	—	—	—	—	+3500	-230	—	RNP APCH
020	TF	GASEV	—	150(146.7)	—	6.0	—	+3500	-230	—	RNP APCH
010	IF	GASEV	—	—	—	—	—	+3500	-230	—	RNP APCH
020	TF	BS501	—	060(056.7)	—	5.3	—	3000	—	—	RNP APCH
030	TF	RW06	Y	060(056.7)	—	5.5	—	@1238	—	3.0/15	RNP APCH
040	CF	BS502	Y	060(056.7)	—	5.0	—	—	-230	—	RNP APCH
050	DF	EDKAM	—	—	—	—	R	+3500	-230	—	RNP APCH
010	IF	GASEV	—	—	—	—	—	+3500	-230	—	RNP APCH
020	HM	GASEV	—	060(056.7)	—	—	R	+3500	-230	—	RNP APCH

WAYPOINT LIST
RNP RWY 06
Waypoint Identifier
Coordinates


DIPLU	12°30'39.603"N	008°10'15.005"W
GASEV	12°25'37.574"N	008°06'52.659"W
EDKAM	12°20'35.501"N	008°03'30.443"W
BS501	12°28'33.152"N	008°02'21.140"W
BS502	12°34'22.057"N	007°53'20.929"W
RW06	12°31'36.563"N	007°57'37.273"W

**INSTRUMENT
APPROACH CHART**
Categories A-B-C-DAERODROME ELEV: 1247
THR RWY 24 ELEV: 1247**Bamako-Senou / President MODIBO KEITA (GABS)**

TWR / APP : 118.3

RNP RWY 24

HEIGHTS RELATED TO THR RWY 24 ELEV

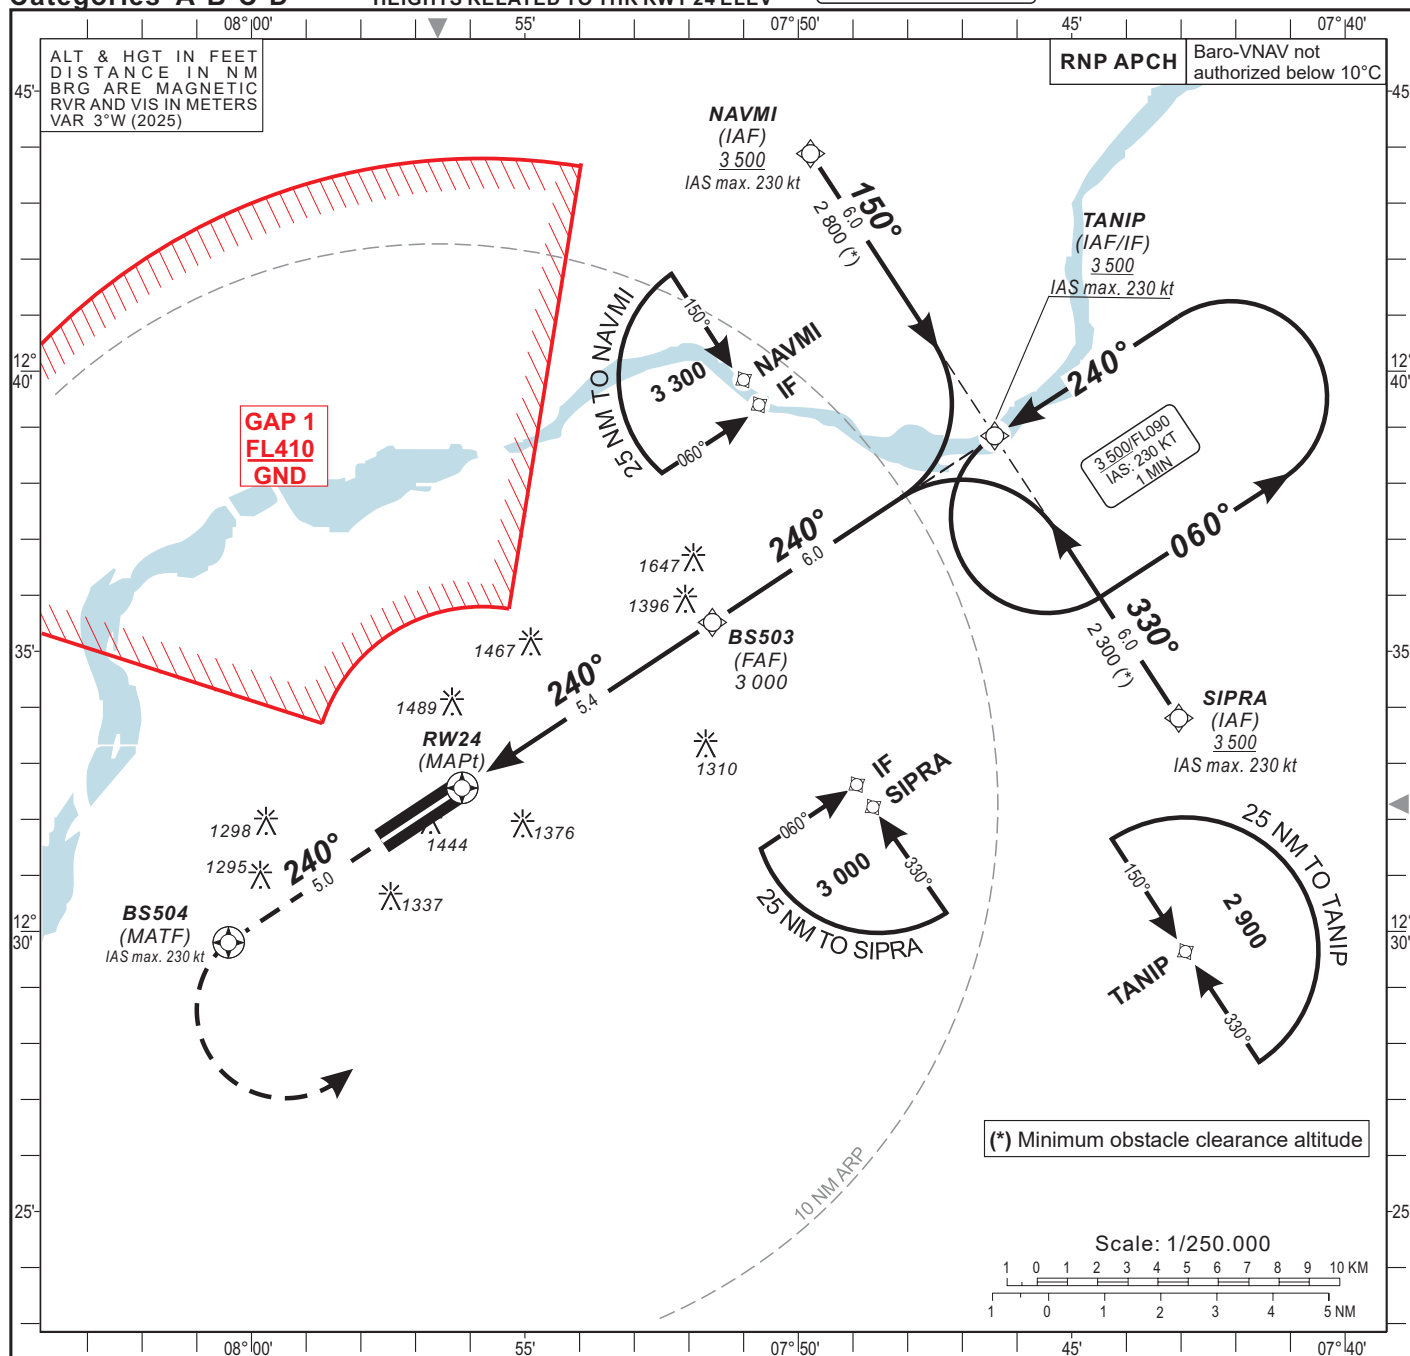


TRANSITION ALTITUDE: 4 500

DISTANCE TO RW24 (NM)	2	3	4	5	FAF
ALTITUDE (FT)	1 940	2 260	2 570	2 890	3 000

MISSED APPROACH:

Climb on track 240°.
At BS504 turn left direct to
SIPRA at or above 3 500 ft
or as instructed by ATC.
IAS max. 230 kt

REF HGT: THR ELEV. 1 247

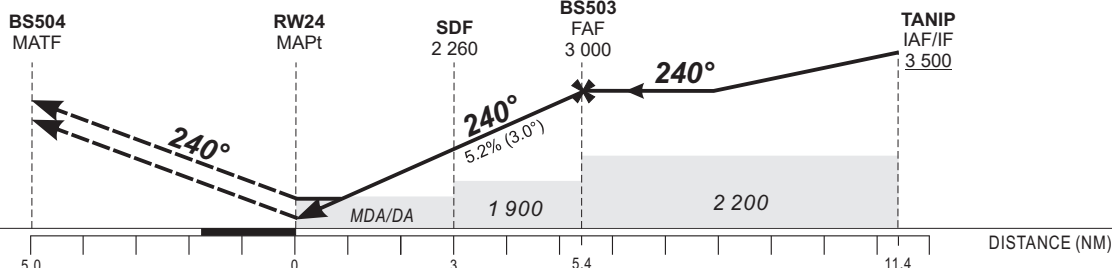

CAT	LNAV/VNAV				LNAV				CIRCLING 1				Timing	FAF / THR 5.4 NM
	OCA (OCH)	DA	DH	RVR	OCA (OCH)	MDA	MDH	RVR	OCA (OCH)	MDA	MDH	VIS		
A	1539 (292)	1540 (300)	1400	1648 (401)	1650 (410)	1900	1785 (538)	1790 (540)	2400				90	3 Min 36
B	1549 (302)	1550 (310)	1400	1648 (401)	1650 (410)	1900	1795 (548)	1800 (550)	2400				100	3 Min 14
C	1556 (309)	1560 (310)	1400	1648 (401)	1650 (410)	1900	1897 (650)	1900 (650)	2400				110	2 Min 57
D	1564 (317)	1570 (320)	1400	1648 (401)	1650 (410)	1900	1947 (700)	1950 (700)	3600				120	2 Min 42
													130	2 Min 30

Notes:


1 Daytime only. OCH and MDH AAL

- RDH: 15 m

TABULAR DESCRIPTION											
RNP RWY 24											
Serial Number	Path Descriptor	Waypoint Identifier	Fly-Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (Kt)	VPA/ TCH (°/m)	Navigation Specification
010	IF	SIPRA	—	—	—	—	—	+3500	-230	—	RNP APCH
020	TF	TANIP	—	330(326.7)	—	6.0	—	+3500	-230	—	RNP APCH
010	IF	NAVMI	—	—	—	—	—	+3500	-230	—	RNP APCH
020	TF	TANIP	—	150(146.7)	—	6.0	—	+3500	-230	—	RNP APCH
010	IF	TANIP	—	—	—	—	—	+3500	-230	—	RNP APCH
020	TF	BS503	—	240(236.7)	—	6.0	—	3000	—	—	RNP APCH
030	TF	RW24	Y	240(236.7)	—	5.4	—	@1297	—	3.0/15	RNP APCH
040	CF	BS504	Y	240(236.7)	—	5.0	—	—	-230	—	RNP APCH
050	DF	SIPRA	—	—	—	—	L	+3500	-230	—	RNP APCH
010	IF	TANIP	—	—	—	—	—	+3500	-230	—	RNP APCH
020	HM	TANIP	—	240(236.7)	—	—	L	+3500	-230	—	RNP APCH

WAYPOINT LIST		
RNP RWY 24		
Waypoint Identifier	Coordinates	
SIPRA	12°33'48.326"N	007°43'02.475"W
TANIP	12°38'50.652"N	007°46'24.464"W
NAVMI	12°43'52.932"N	007°49'46.585"W
BS503	12°35'30.862"N	007°51'34.295"W
BS504	12°29'48.256"N	008°00'24.929"W
RW24	12°32'33.795"N	007°56'08.645"W

VOR RWY 06

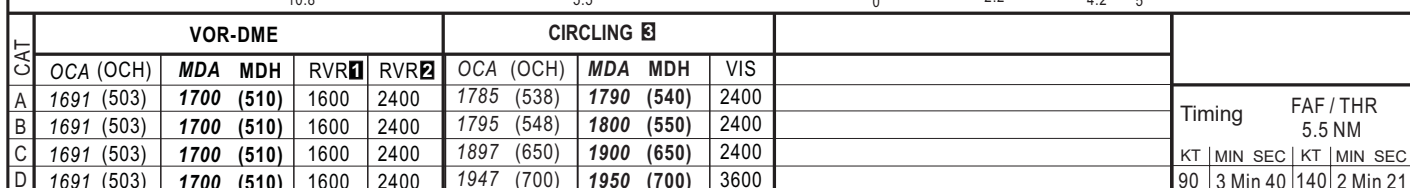


Notes:

- 1** With approach lights
- 2** Without approach lights
- 3** Daytime only. OCH and MDH AAL

Timing			FAF / THR 5.5 NM		
KT	MIN	SEC	KT	MIN	SEC
90	3 Min	40	140	2 Min	21
100	3 Min	18	150	2 Min	12
110	3 Min	00	160	2 Min	04
120	2 Min	45	170	1 Min	56
130	2 Min	32	180	1 Min	50

VOR RWY 24

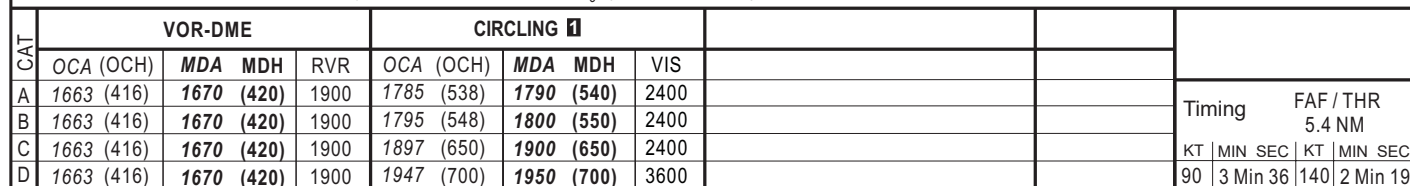

1 Daytime only

Timing			FAF / THR 5.4 NM		
KT	MIN	SEC	KT	MIN	SEC
90	3 Min	36	140	2 Min	19
100	3 Min	14	150	2 Min	10
110	2 Min	57	160	2 Min	01
120	2 Min	42	170	1 Min	54
130	2 Min	30	180	1 Min	48




STANDARD ARRIVAL CHART
INSTRUMENT (STAR)
Categories A-B-C-D

TWR / APP : 118.3

Bamako-Senou / President MODIBO KEITA (GABS)
RNP RWY 06

UBATI 1A - NEGLO 1A - BIDOK 1A - ENIBU 1A - GARAN 1A - OPARA 1A - ARKUR 1A
ENOLU 1A - MERIP 1A - NAPTU 1A - MINVO 1A - POMUP 1A - MOPAL 1A

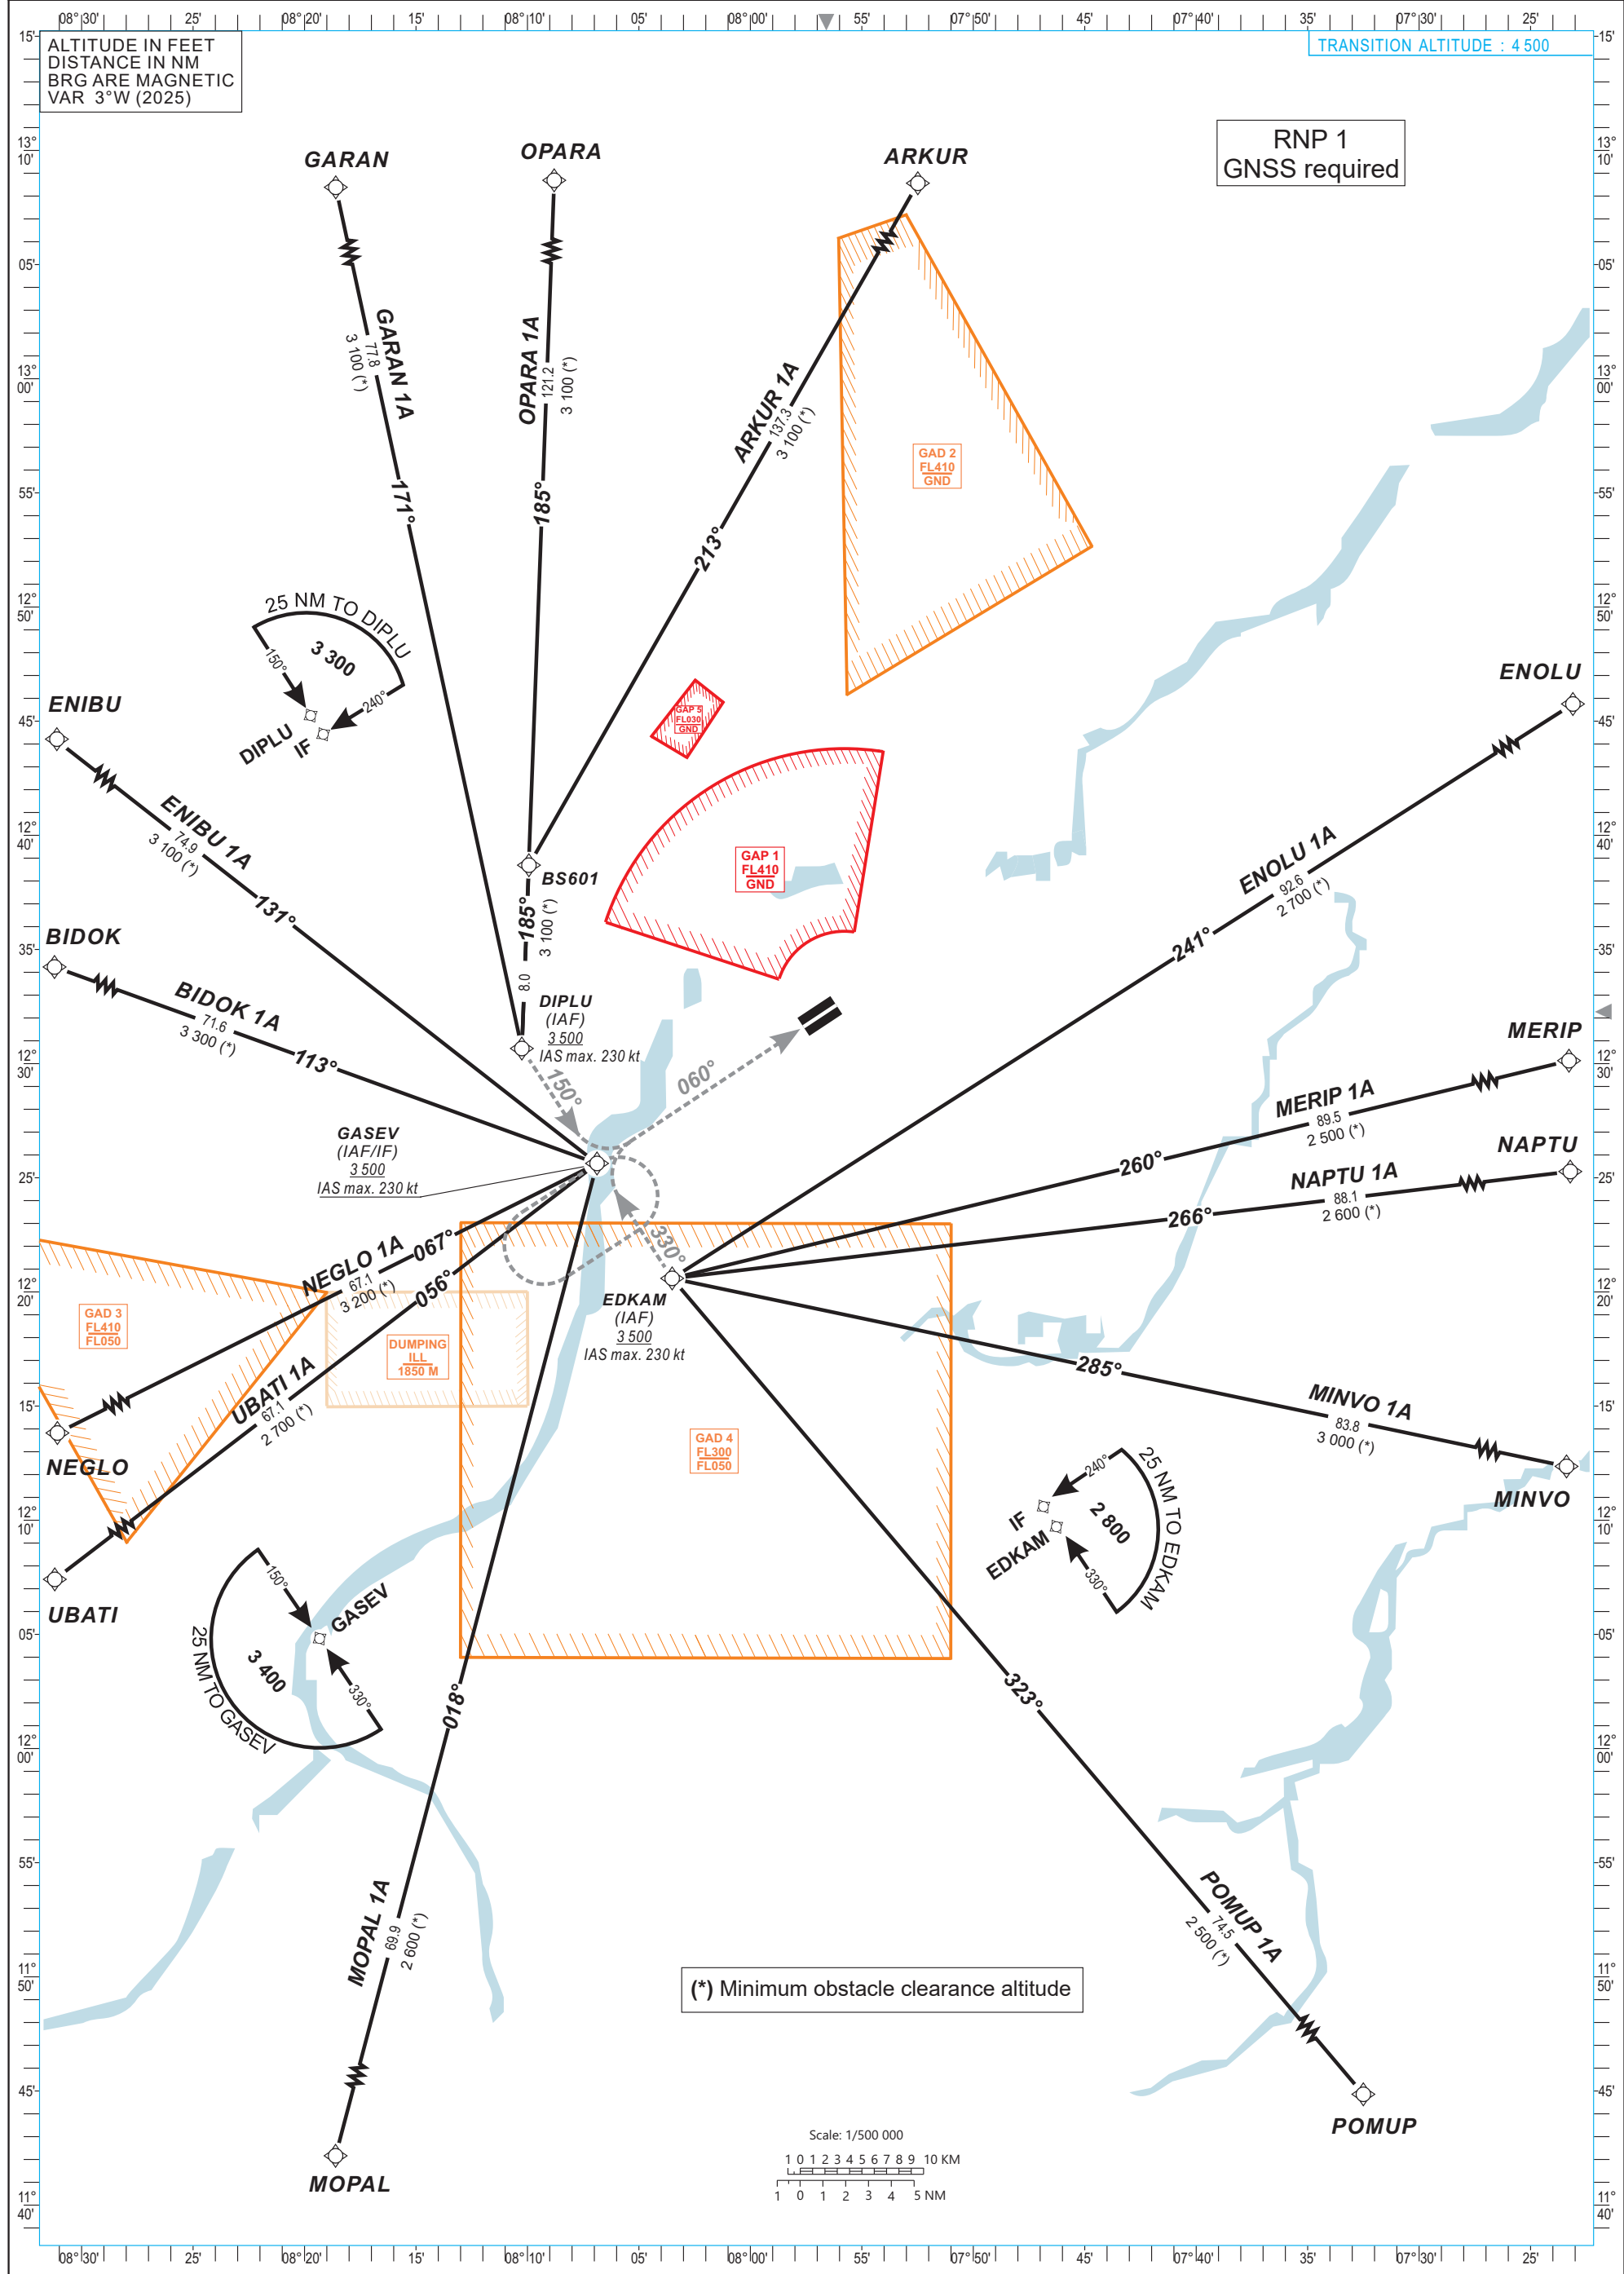



STANDARD ARRIVAL CHART
INSTRUMENT (STAR)
Categories A-B-C-D

Bamako-Senou / President MODIBO KEITA (GABS)
RNP RWY 06

UBATI 1A - NEGLO 1A - BIDOK 1A - ENIBU 1A - GARAN 1A - OPARA 1A - ARKUR 1A
 ENOLU 1A - MERIP 1A - NAPTU 1A - MINVO 1A - POMUP 1A - MOPAL 1A

TABULAR DESCRIPTION

Serial Number	Path Descriptor	Waypoint Identifier	Fly-Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (Kt)	Navigation Specification
ENOLU 1A										
010	IF	ENOLU	—	—	—	—	—	—	—	RNP 1
020	TF	EDKAM	—	241(237.8)	—	92.6	—	+3500	-230	RNP 1
MERIP 1A										
010	IF	MERIP	—	—	—	—	—	—	—	RNP 1
020	TF	EDKAM	—	260(256.6)	—	89.5	—	+3500	-230	RNP 1
NAPTU 1A										
010	IF	NAPTU	—	—	—	—	—	—	—	RNP 1
020	TF	EDKAM	—	266(263.4)	—	88.1	—	+3500	-230	RNP 1
MINVO 1A										
010	IF	MINVO	—	—	—	—	—	—	—	RNP 1
020	TF	EDKAM	—	285(281.9)	—	83.8	—	+3500	-230	RNP 1
POMUP 1A										
010	IF	POMUP	—	—	—	—	—	—	—	RNP 1
020	TF	EDKAM	—	323(319.6)	—	74.5	—	+3500	-230	RNP 1
MOPAL 1A										
010	IF	MOPAL	—	—	—	—	—	—	—	RNP 1
020	TF	GASEV	—	018(014.9)	—	69.9	—	+3500	-230	RNP 1
UBATI 1A										
010	IF	UBATI	—	—	—	—	—	—	—	RNP 1
020	TF	GASEV	—	056(052.6)	—	67.1	—	+3500	-230	RNP 1
NEGLO 1A										
010	IF	NEGLO	—	—	—	—	—	—	—	RNP 1
020	TF	GASEV	—	067(063.5)	—	67.1	—	+3500	-230	RNP 1
BIDOK 1A										
010	IF	BIDOK	—	—	—	—	—	—	—	RNP 1
020	TF	GASEV	—	113(109.7)	—	71.6	—	+3500	-230	RNP 1
ENIBU 1A										
010	IF	ENIBU	—	—	—	—	—	—	—	RNP 1
020	TF	GASEV	—	131(127.8)	—	74.9	—	+3500	-230	RNP 1
GARAN 1A										
010	IF	GARAN	—	—	—	—	—	—	—	RNP 1
020	TF	DIPLU	—	171(167.7)	—	77.8	—	+3500	-230	RNP 1
OPARA 1A										
010	IF	OPARA	—	—	—	—	—	—	—	RNP 1
020	TF	BS601	—	185(182.1)	—	121.2	—	—	—	RNP 1
030	IF	DIPLU	—	185(182.1)	—	8.0	—	+3500	-230	RNP 1
ARKUR 1A										
010	IF	ARKUR	—	—	—	—	—	—	—	RNP 1
020	TF	BS601	—	213(209.9)	—	137.3	—	—	—	RNP 1
030	TF	DIPLU	—	185(182.1)	—	8.0	—	+3500	-230	RNP 1

WAYPOINT LIST


Waypoint	Latitude	Longitude
ENOLU	13°10'25.000"N	006°43'29.000"W
MERIP	12°41'41.000"N	006°34'31.000"W
NAPTU	12°30'59.000"N	006°34'03.000"W
MINVO	12°03'24.000"N	006°39'45.000"W
POMUP	11°23'41.000"N	007°14'08.000"W
MOPAL	11°17'47.000"N	008°25'11.000"W
UBATI	11°44'49.000"N	009°01'22.000"W
NEGLO	11°55'40.000"N	009°08'18.000"W
BIDOK	12°49'59.000"N	009°15'46.000"W

WAYPOINT LIST

Waypoint	Latitude	Longitude
ENIBU	13°11'51.750"N	009°07'22.970"W
GARAN	13°47'02.000"N	008°27'09.000"W
OPARA	14°40'23.000"N	008°05'18.000"W
ARKUR	14°38'25.000"N	007°00'00.000"W
EDKAM	12°20'35.501"N	008°03'30.443"W
GASEV	12°25'37.574"N	008°06'52.659"W
DIPLU	12°30'39.603"N	008°10'15.005"W
BS601	12°38'41.400"N	008°09'56.013"W

**STANDARD ARRIVAL CHART
INSTRUMENT (STAR RNP)
Categories A-B-C-D**

TWR / APP : 118.3

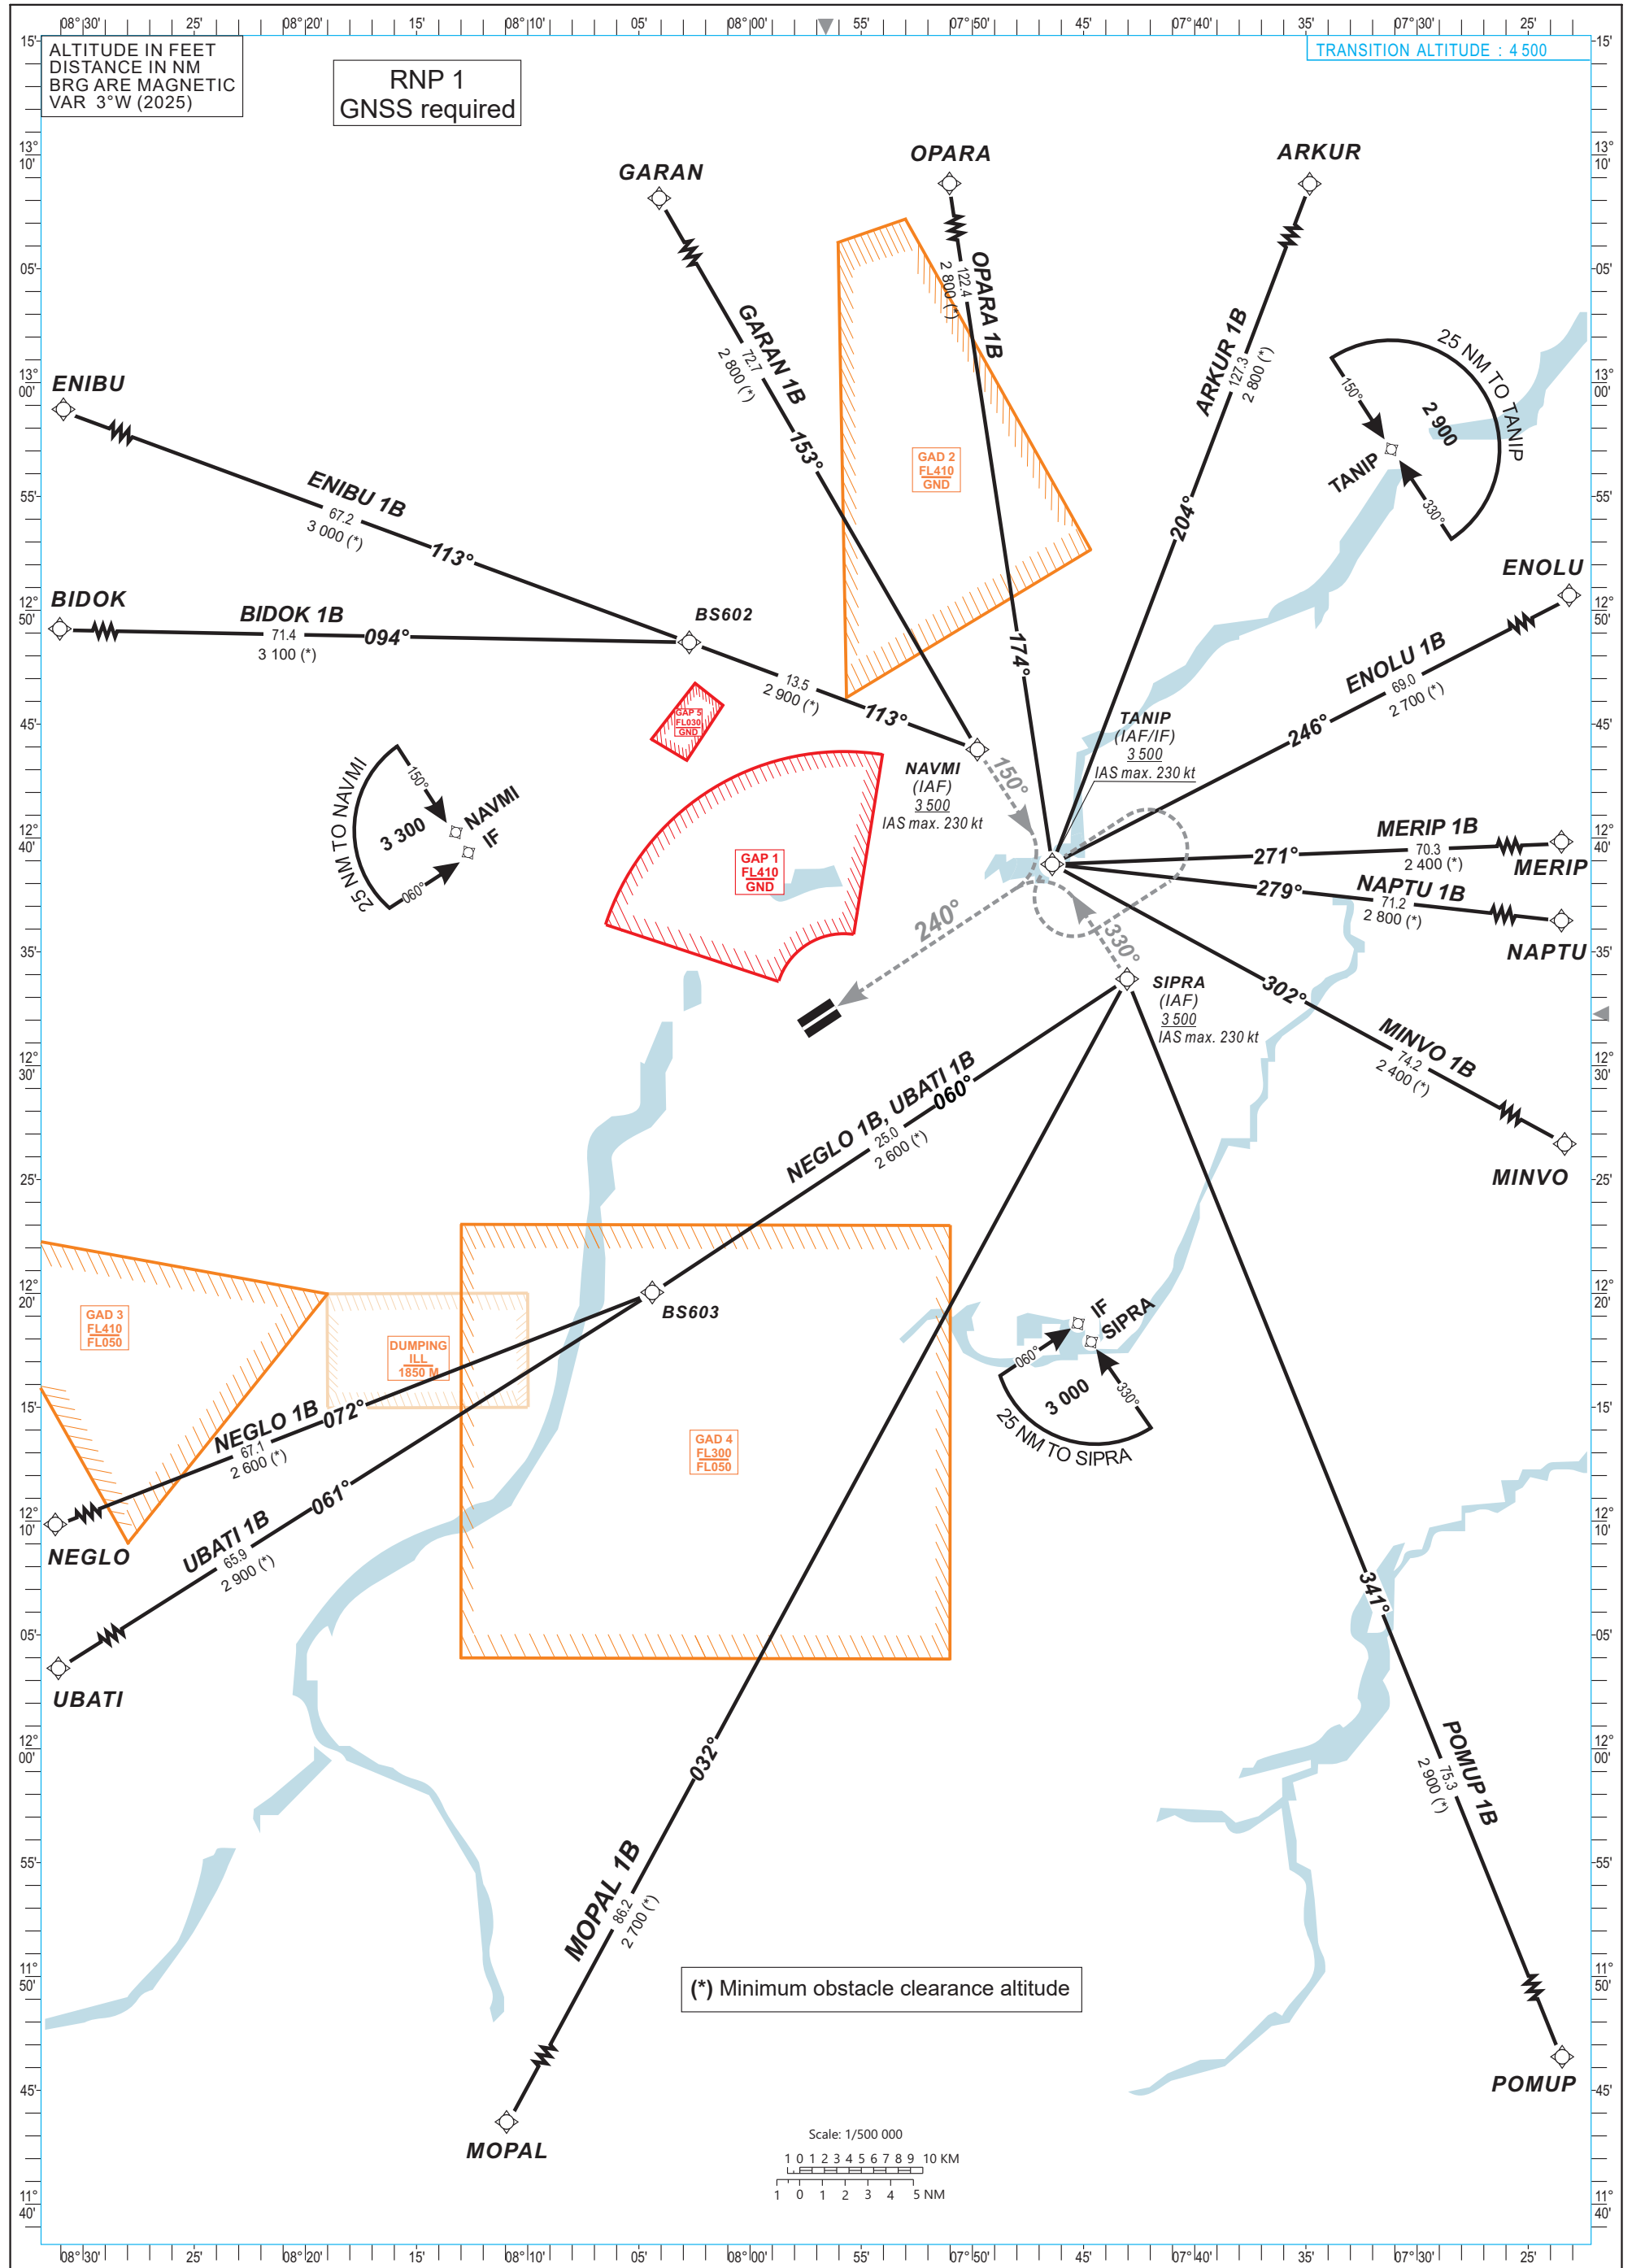**Bamako-Senou / President MODIBO KEITA (GABS)
RWY 24**UBATI 1B - NEGLO 1B - BIDOK 1B - ENIBU 1B - GARAN 1B - OPARA 1B - ARKUR 1B
ENOLU 1B - MERIP 1B - NAPTU 1B - MINVO 1B - POMUP 1B - MOPAL 1B


STANDARD ARRIVAL CHART
INSTRUMENT (STAR)
Categories A-B-C-D
Bamako-Senou / President MODIBO KEITA (GABS)
RNP RWY 24

 UBATI 1B - NEGLO 1B - BIDOK 1B - ENIBU 1B - GARAN 1B - OPARA 1B - ARKUR 1B
 ENOLU 1B - MERIP 1B - NAPTU 1B - MINVO 1B - POMUP 1B - MOPAL 1B

TABULAR DESCRIPTION

Serial Number	Path Descriptor	Waypoint Identifier	Fly-Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed limit (Kt)	Navigation Specification
ENOLU 1B										
010	IF	ENOLU	—	—	—	—	—	—	—	RNP 1
020	TF	TANIP	—	246(243.0)	—	69.0	—	+3500	-230	RNP 1
MERIP 1B										
010	IF	MERIP	—	—	—	—	—	—	—	RNP 1
020	TF	TANIP	—	271(267.8)	—	70.3	—	+3500	-230	RNP 1
NAPTU 1B										
010	IF	NAPTU	—	—	—	—	—	—	—	RNP 1
020	TF	TANIP	—	279(276.4)	—	71.2	—	+3500	-230	RNP 1
MINVO 1B										
010	IF	MINVO	—	—	—	—	—	—	—	RNP 1
020	TF	TANIP	—	302(298.5)	—	74.2	—	+3500	-230	RNP 1
POMUP 1B										
010	IF	POMUP	—	—	—	—	—	—	—	RNP 1
020	TF	SIPRA	—	341(338.0)	—	75.3	—	+3500	-230	RNP 1
MOPAL 1B										
010	IF	MOPAL	—	—	—	—	—	—	—	RNP 1
020	TF	SIPRA	—	032(028.6)	—	86.2	—	+3500	-230	RNP 1
GARAN 1B										
010	IF	GARAN	—	—	—	—	—	—	—	RNP 1
020	TF	NAVMI	—	153(149.8)	—	72.7	—	+3500	-230	RNP 1
OPARA 1B										
010	IF	OPARA	—	—	—	—	—	—	—	RNP 1
020	TF	TANIP	—	174(171.3)	—	122.4	—	+3500	-230	RNP 1
ARKUR 1B										
010	IF	ARKUR	—	—	—	—	—	—	—	RNP 1
020	TF	TANIP	—	204(200.9)	—	127.3	—	+3500	-230	RNP 1
ENIBU 1B										
010	IF	ENIBU	—	—	—	—	—	—	—	RNP 1
020	TF	BS602	—	113(110.0)	—	67.2	—	—	—	RNP 1
030	TF	NAVMI	—	113(110.3)	—	13.5	—	+3500	-230	RNP 1
UBATI 1B										
010	IF	UBATI	—	—	—	—	—	—	—	RNP 1
020	TF	BS603	—	061(057.8)	—	65.9	—	—	—	RNP 1
030	TF	SIPRA	—	060(056.7)	—	25.0	—	+3500	-230	RNP 1
NEGLO 1B										
010	IF	NEGLO	—	—	—	—	—	—	—	RNP 1
020	TF	BS603	—	072(068.7)	—	67.1	—	—	—	RNP 1
030	IF	SIPRA	—	060(056.7)	—	25.0	—	+3500	-230	RNP 1
BIDOK 1B										
010	IF	BIDOK	—	—	—	—	—	—	—	RNP 1
020	TF	BS602	—	094(091.0)	—	71.4	—	—	—	RNP 1
030	TF	NAVMI	—	113(110.3)	—	13.5	—	+3500	-230	RNP 1

WAYPOINT LIST

Waypoint	Latitude	Longitude
ENOLU	13°10'25.000"N	006°43'29.000"W
MERIP	12°41'41.000"N	006°34'31.000"W
NAPTU	12°30'59.000"N	006°34'03.000"W
MINVO	12°03'24.000"N	006°39'45.000"W
POMUP	11°23'41.000"N	007°14'08.000"W
MOPAL	11°17'47.000"N	008°25'11.000"W
UBATI	11°44'49.000"N	009°01'22.000"W
NEGLO	11°55'40.000"N	009°08'18.000"W
BIDOK	12°49'59.000"N	009°15'46.000"W

WAYPOINT LIST

Waypoint	Latitude	Longitude
ENIBU	13°11'51.750"N	009°07'22.970"W
GARAN	13°47'02.000"N	008°27'09.000"W
OPARA	14°40'23.000"N	008°05'18.000"W
ARKUR	14°38'25.000"N	007°00'00.000"W
NAVMI	12°43'52.932"N	007°49'46.585"W
TANIP	12°38'50.652"N	007°46'24.464"W
SIPRA	12°33'48.326"N	007°43'02.475"W
BS602	12°48'35.499"N	008°02'43.903"W
BS603	12°20'00.993"N	008°04'23.791"W




STANDARD ARRIVAL CHART
INSTRUMENT (STAR)
Categories A-B-C-D

TWR / APP : 118.3

Bamako-Senou / President MODIBO KEITA (GABS)
VOR-DME RWY 06

ENOLU 1G - MERIP 1G - NAPTU 1G - MINVO 1G - POMUP 1G - MOPAL 1G - UBATI 1G -
NEGLO 1G - BIDOK 1G - ENIBU 1G - GARAN 1G - OPARA 1G - ARKUR 1G

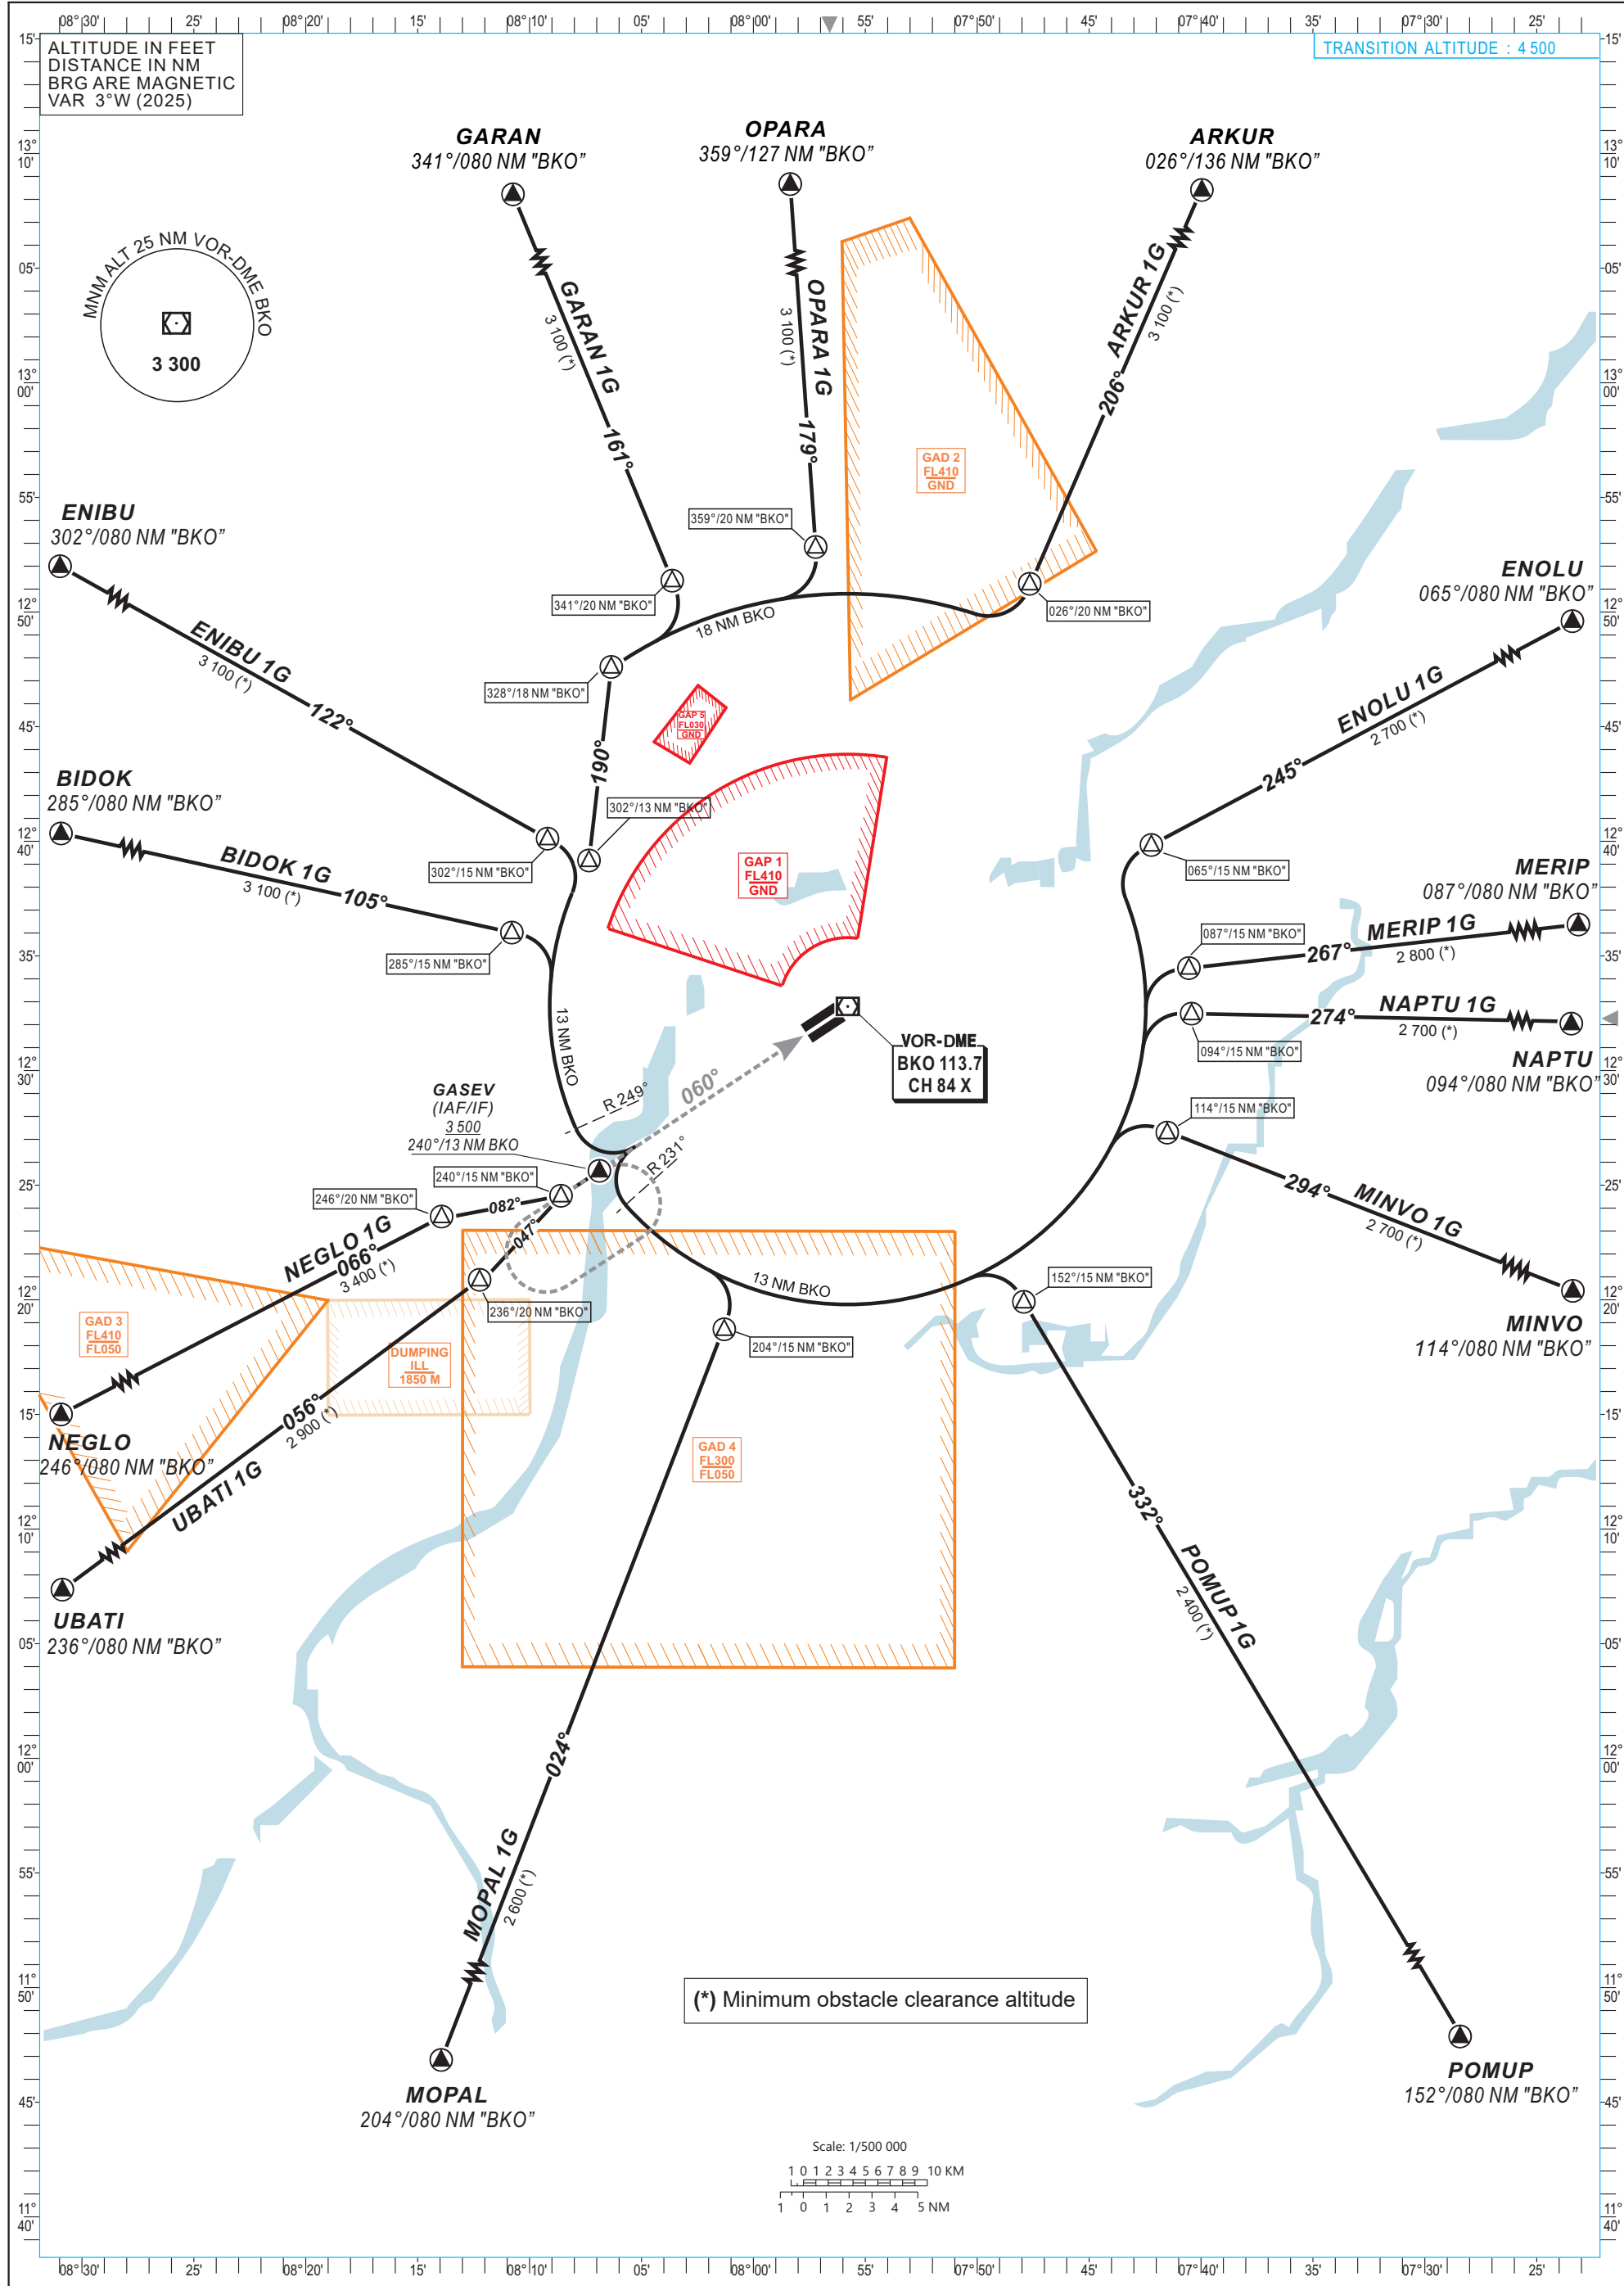

Bamako-Senou / President MODIBO KEITA (GABS)
VOR-DME RWY 24

TWR / APP : 118.3

ENOLU 1T - MERIP 1T - NAPTU 1T - MINVO 1T - POMUP 1T - MOPAL 1T - UBATI 1T -
NEGLO 1T - BIDOK 1T - ENIBU 1T - GARAN 1T - OPARA 1T - ARKUR 1T

